


Ultrasonic sensors.

Compact, multi-purpose, robust.
Edition 2013

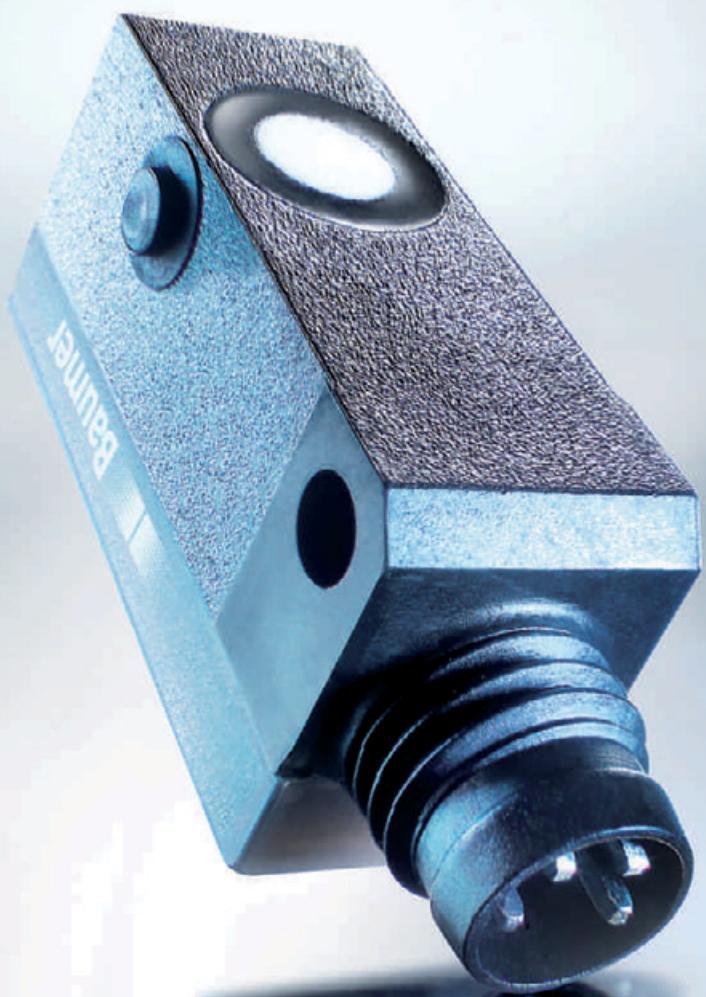

Easy to operate and
ideal for demanding
applications – ultrasonic
sensors by Baumer.

Visibly better: Baumer sensors.

The Baumer Group is leading at international level in the development and production of sensors, shaft encoders, measuring instruments as well as components for automatic image processing. As an owner-managed family business, we employ about 2500 workers worldwide in 36 subsidiaries and 18 countries. With marked customer orientation, consistently high quality and vast innovation potential worldwide, Baumer develops specific solutions for many industries and applications.

Our standards – your benefits.

- Passion coupled with expertise – both have made us a sensor pioneer and technology leader
- Our range of services is hard to beat – we have the right product, developed by our own team, for every task
- Inspiring through innovation – a challenge Baumer employees take on every day
- Reliability, precision and quality – our customers' requirements are what drives us
- Partnership from the start – together with our customers we develop suitable solutions
- Always a step ahead – thanks to our production depth, our flexibility and our delivery reliability
- Available worldwide – Baumer is Baumer everywhere



All-round talents.

Most ultrasonic sensors are based on the principle of measuring the propagation time of sound in air. Packages of ultrasonic sound, so-called bursts, are emitted by the sensor, reflected by an object and received again by the sensor. The integrated transducers with sonic frequencies far beyond the range of human hearing, constantly switch to and fro between emission and reception. The returned echo signals are evaluated by the integrated electronics of the sensor. Depending on the sensor type, the information is provided at the output either as digital or analog signals.

Unlike optical sensors, influences such as changing colors, transparency or high reflectivity have no bearing on the detection of objects. Ultrasonic sensors maintain their excellence even in harsh environments. They are extremely resistant to dirt, and process reliability is not impaired by dust, smoke, vapors, or other contaminants.

The following types are available:

- Ultrasonic distance measuring sensors
- Ultrasonic proximity sensors
- Ultrasonic 2 point proximity switches
- Ultrasonic retro-reflective sensors
- Ultrasonic through beam sensors



Learn more.

Downloadable data sheets as well as further information about our products is available at:
www.baumer.com/ultrasonic



Table of contents.

Introduction	
Applications	8
Function	14
Typical sonic cone profile	15
Mounting	16
General definitions	19
Ultrasonic distance measuring sensors	
Introduction	22
Overview	24
Rectangular designs	26
Cylindrical designs	44
Ultrasonic proximity sensors	
Introduction	54
Overview	56
Rectangular designs	58
Cylindrical designs	69
Ultrasonic 2 point proximity switches	
Introduction	82
Overview	83
Rectangular designs	84
Cylindrical designs	88
Ultrasonic retro-reflective sensors	
Introduction	92
Overview	94
Rectangular designs	96
Cylindrical designs	104
Ultrasonic through beam sensors	
Introduction	110
Rectangular designs	112
Accessories	
Connectors	116
Connectors/Pin assignment	119
Mounting accessories	120
Mounting kits <i>SENSOFIX</i>	122
Quick reference list	
Quick reference list A–Z	124




Baumer – setting standards with innovations.

The success story of the Baumer Group is characterized by innovations. By hardware and software engineers, designers or process engineers who work day in and day out to make our products and systems even better.

Our particular focus is on further miniaturization, enhanced precision as well as improved measuring speed and sensor robustness. That's what our products are characterized by - and something we are proud of.

The Baumer development teams are organized in an international network and are in close contact with well-known universities, recognized research institutes and highly specialized international engineering companies. As the technological leader, Baumer always endeavors to maintain its lead over the long term and protect its numerous innovations through patents.

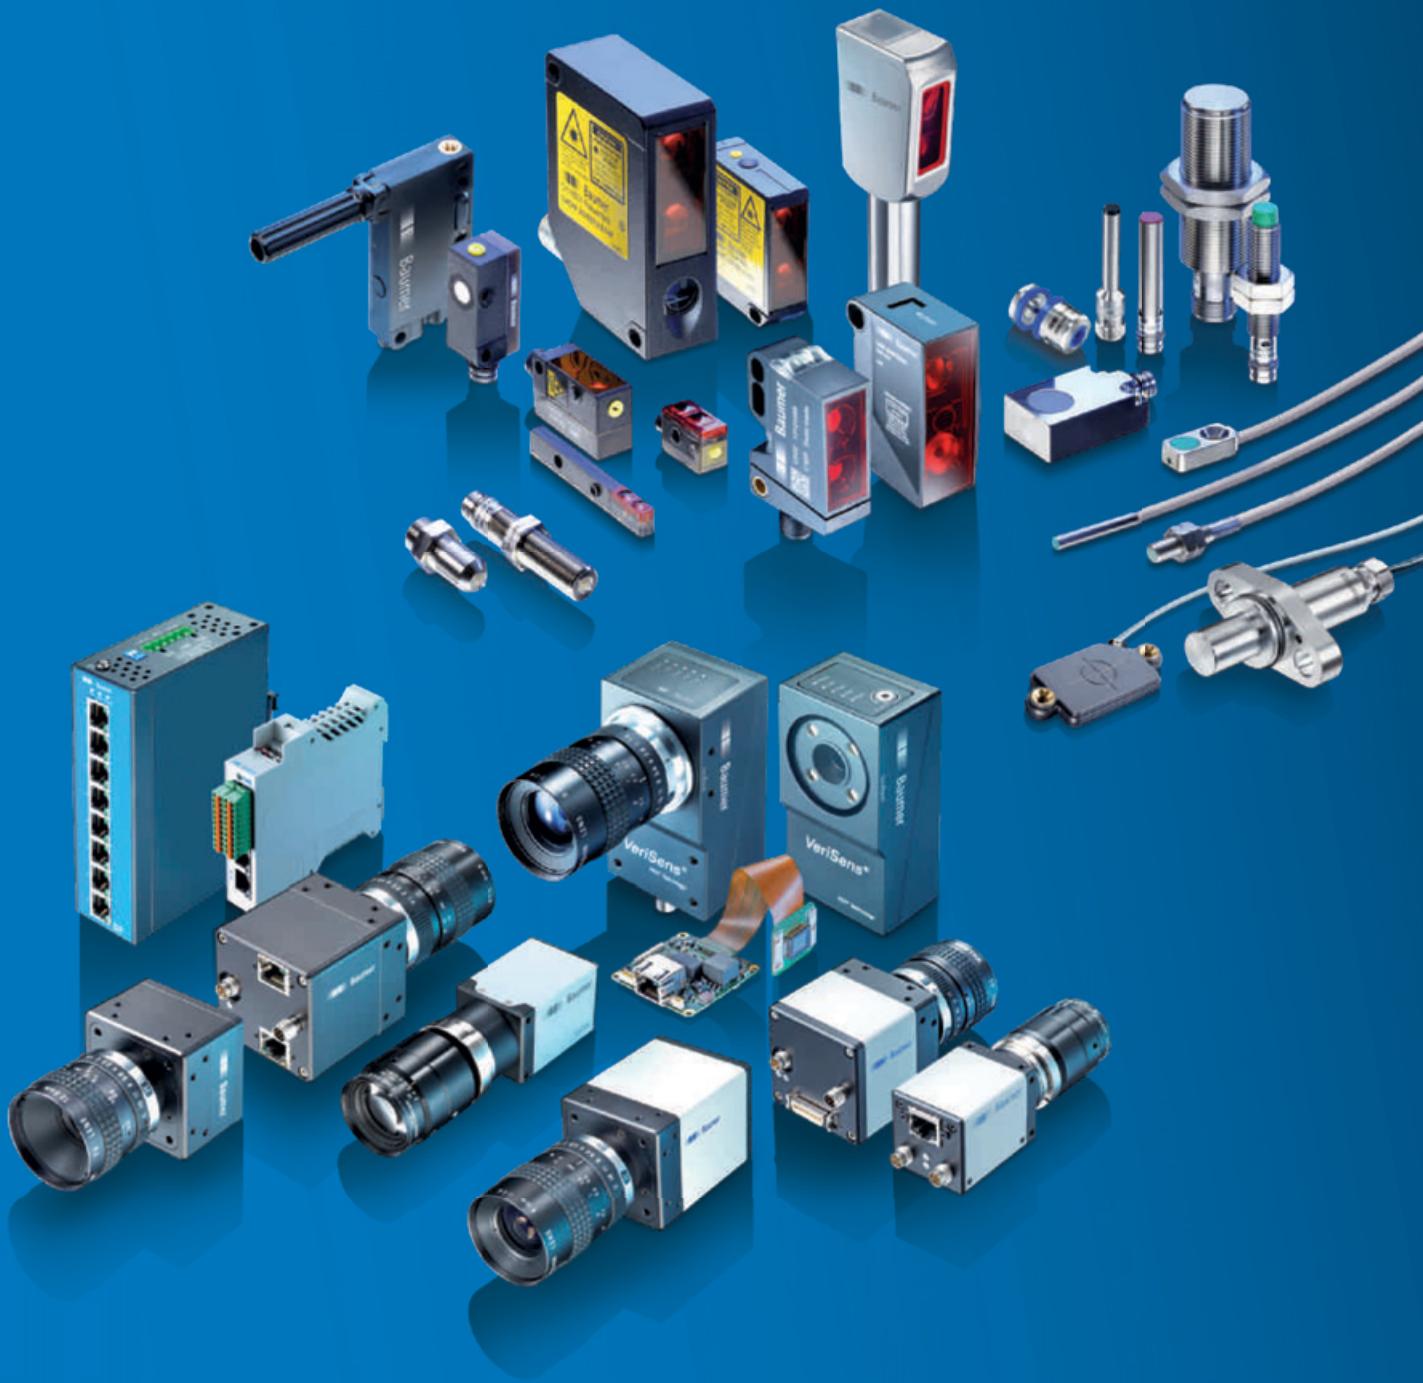

Comprehensive product range


- Actuators and positioning drives
- Capacitive proximity sensors
- Conductivity sensors
- Counters
- Digital cameras
- Encoders
- Force and strain sensors
- Inductive sensors
- Level measurement
- Magnetic sensors
- Network Components
- OCR and code reader systems
- Optical inspection systems
- Photoelectric sensors
- Precision switches My-Com
- Pressure measurement
- Process analysis
- Process displays
- Resolvers
- Speed switches
- Spindle positioning systems
- Tachogenerators
- Temperature sensors
- Ultrasonic sensors
- Vision sensors



- Inductive sensors
- Capacitive sensors
- Photoelectric sensors
- Vision sensors
- Ultrasonic sensors
- Magnetic sensors
- Precision switches
- My-Com

Passion for sensors.

Whether for object or position recognition, measuring, a miniaturized or exceptionally robust design – Baumer has the right sensor for every application. Different sensor functions in standard housings ease assembly for the user and limit the setup time to a minimum. Baumer can supply a wide range from inductive to vision sensors and advise you comprehensively.

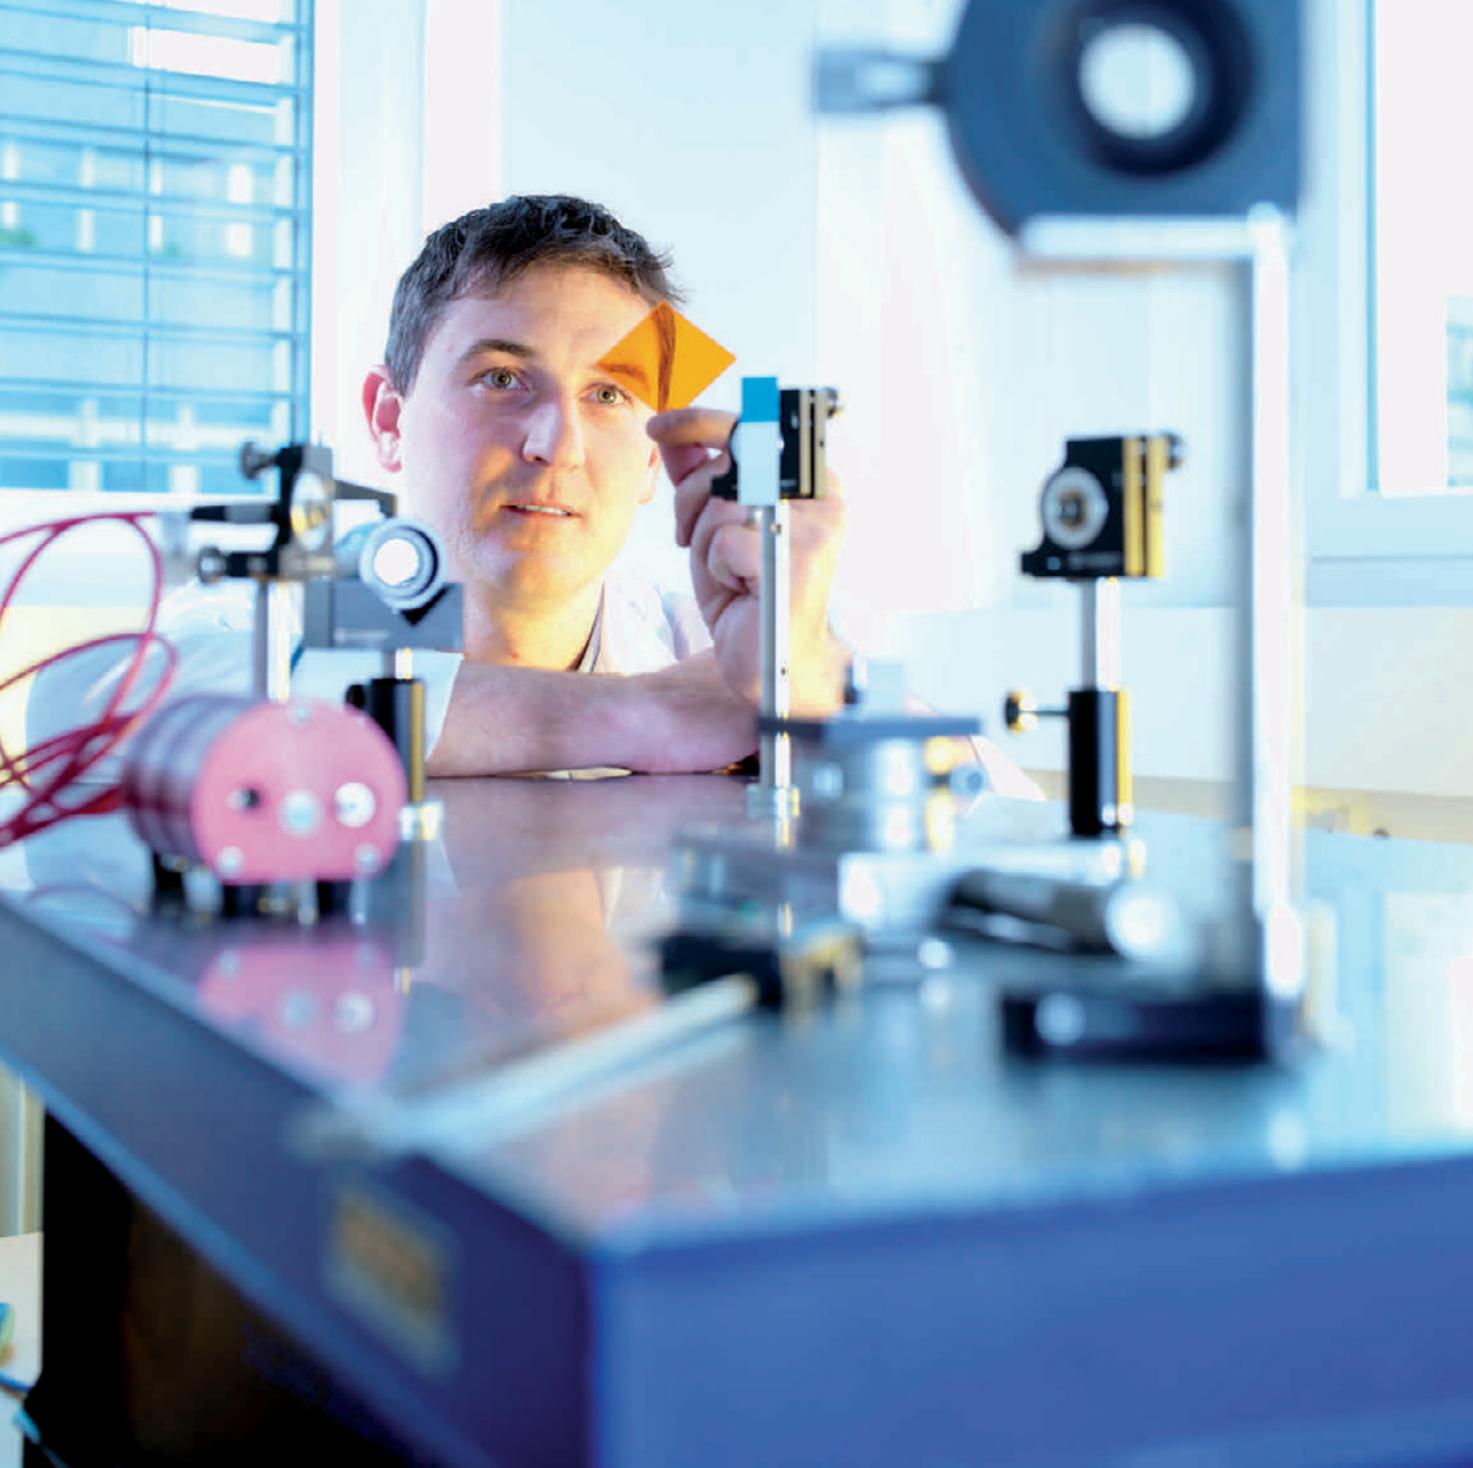

Customized solutions.

Our broad range of products enables us to provide the optimum solution for a large number of applications. But customers might have needs completely outside these application areas that cannot be entirely satisfied by the products currently on the market.

And this is precisely why our development engineers work closely with our customers. In searching for optimum solutions to meet these special needs, we are able to create customized solutions. Our customized solutions range from special mechanical designs to completely new sensor systems.

An innovative sensor solution can also help you gain a significant competitive advantage.

We would be happy to advise you!



Miniature sensors – When space is scarce!

In this age of automation, Baumer ultrasonic sensors are the answer to the continuing trend towards miniaturization and higher integration.

This trend has led Baumer's small and compact ultrasonic sensors, with their hardy performance, to enjoy a major focus of interest.


There are four sensor types to provide this high performance:

- Ultrasonic proximity switches
- Ultrasonic retro-reflective sensors
- Ultrasonic through beam sensors
- Distance measuring ultrasonic sensors

Though special emphasis was placed on the miniature design, there was no compromising on the versatile application capabilities of these mighty minis:


- Distinctly narrow sonic cone profiles enable the sensors to look and measure into smallest cavities
- Minimized mutual interference of sensors installed in close proximity thanks to synchronized and multiplexed operation
- Some housing types are mechanically compatible with sensors using different technologies. They could be exchanged on short notice should the need arise in case of changing application conditions
- All miniature sensor variations feature Teach-in technology using a standardized Teach-in routine



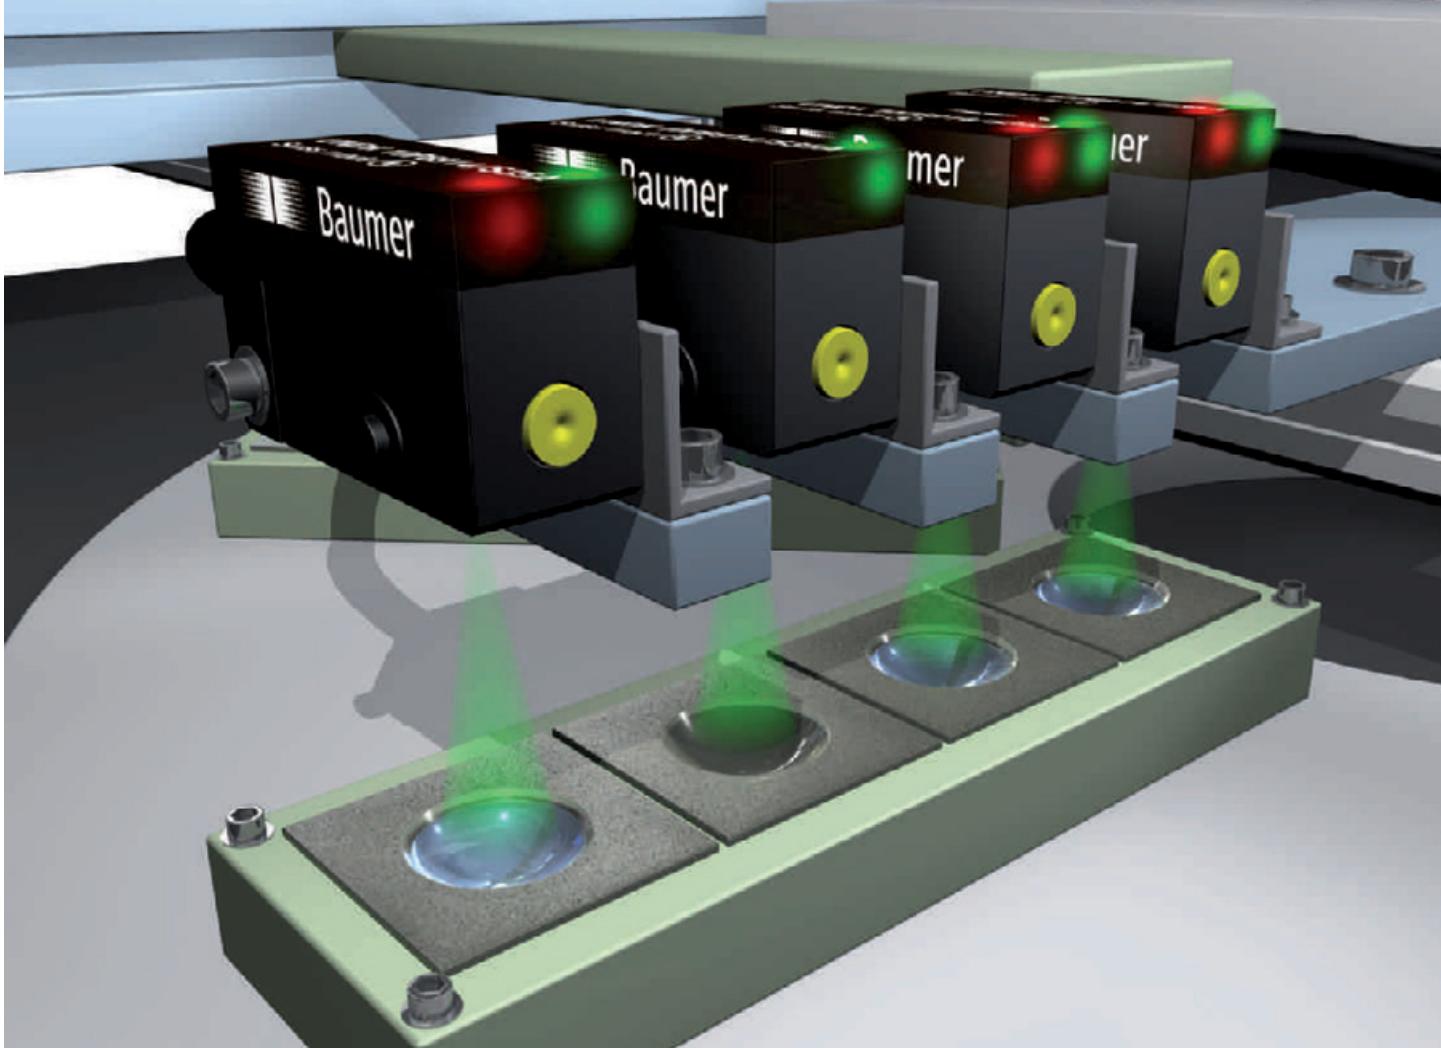

Liquid level detection

- Miniaturized ultrasonic sensors are ideally suited to measure liquid levels in small containers. The miniature housing design allows the installation of several sensors in close proximity.

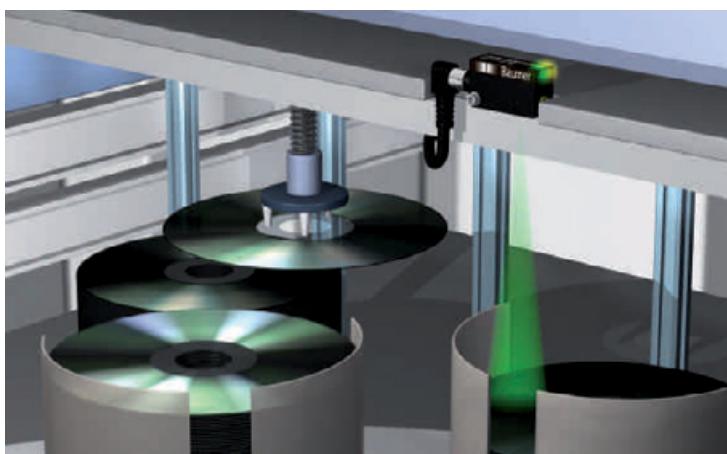

Height measurement

- Miniature ultrasonic sensors reliably measure the distance to the object, regardless of surface color, reflectivity or transparency.



Detection into small openings

- Sensors equipped with special beam columnators facilitate the detection of objects and liquids through very small container openings.

Distance measuring sensors – Detecting more!




Ultrasonic distance measuring sensors provide information on an absolute position of a target or moving object. For glossy surfaces, transparent objects or in environments with a high degree of dust and humidity, ultrasonic technologies are often the only alternative to mechanical probing.

Applications for ultrasonic distance measuring sensors include level detection, stack height control as well as absolute position feedback.



Baumer offers a broad selection of ultrasonic distance measuring sensors:

- Sensing distance up to 2500 mm
- High resolution up to 0,1 mm
- Distinctly narrow sonic cone profiles enable the sensors to look and measure into cavities with a diameter of minimal 3 mm
- Available output signals 0...10 VDC and 4...20 mA or inverted from 10...0 VDC and 20...4 mA
- Output signals adjusted to required sensing distance of an object – through potentiometer, Teach-in button or remote Teach-in input

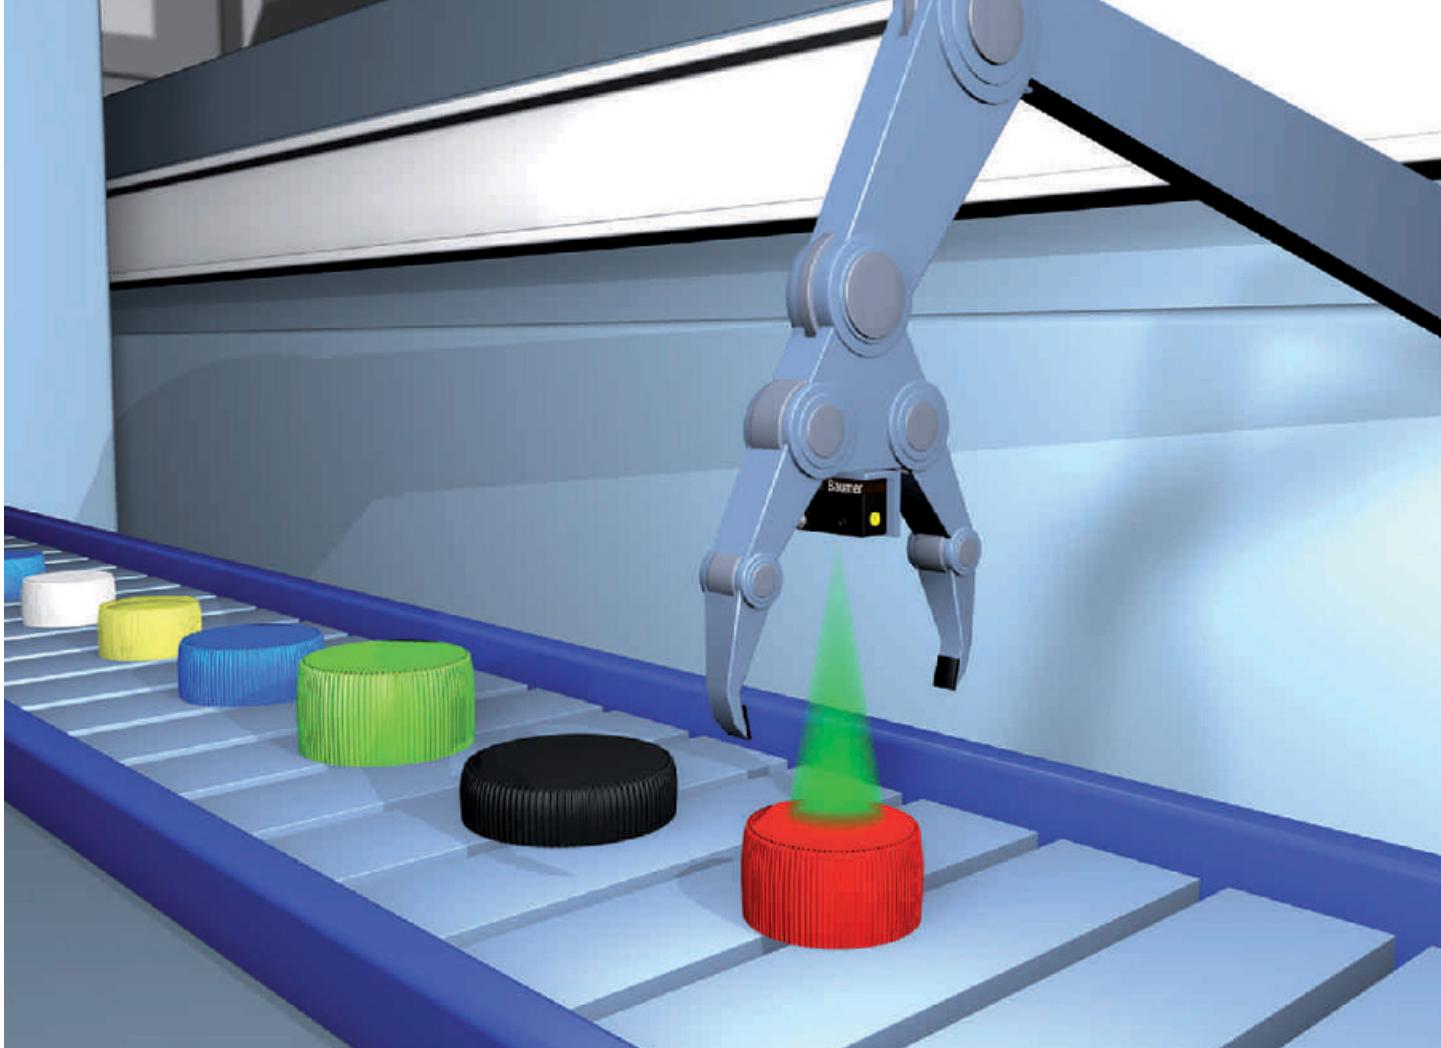

Distance detection

- With its small shape and low weight, the miniaturized ultrasonic sensors can also be installed in small microgripers with limited space to accomodate ultrasonic sensors.

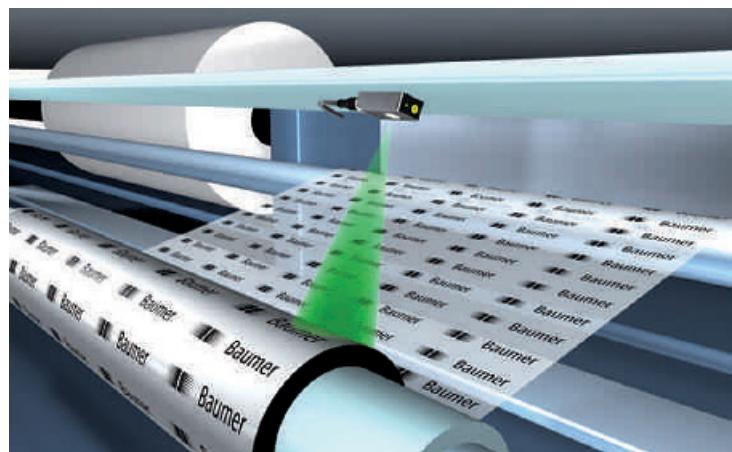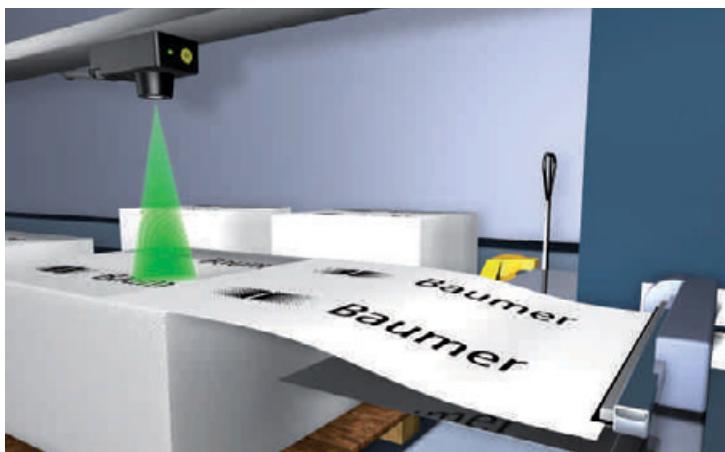

Stacking level control

- Ultrasonic sensors with analog outputs provide a distance proportional output signal highly independent of the target material encountered. The resolution is a uniform 0,3 mm even for the maximum scanning range of 2000 mm.

Determination of roll diameter

- In winding and unwinding operations distance measuring ultrasonic sensors accurately measure the outer diameter of rolls containing materials such as plastic films, sheet metal, paper and cardboard, veneer etc.

Through beam and retro-reflective sensors

For the detection of sound absorbing or fast moving objects the range of ultrasonic barriers is perfectly featured. Used for counting or the detection of a jam on conveyor belts, these sensors allow the recognition of objects which could not even be detected by simple ultrasonic proximity or optical sensors.


Through beam sensors, often used for the rupture control of paper, fabric, metal- or plastic films are capable to detect even high transparent objects.

In front of a reference surface, retro reflective sensors recognize all kinds of objects reliably, no matter if sound absorbing or sound dispersing.

Baumer ultrasonic sensors excel with following features:

- No blind range in front of the active sensing face
- Sensing range up to 3000 mm
- Short response time of less than 5 ms
- Any kind of sound reflecting material can be used as reference surface (retro-reflective sensors)



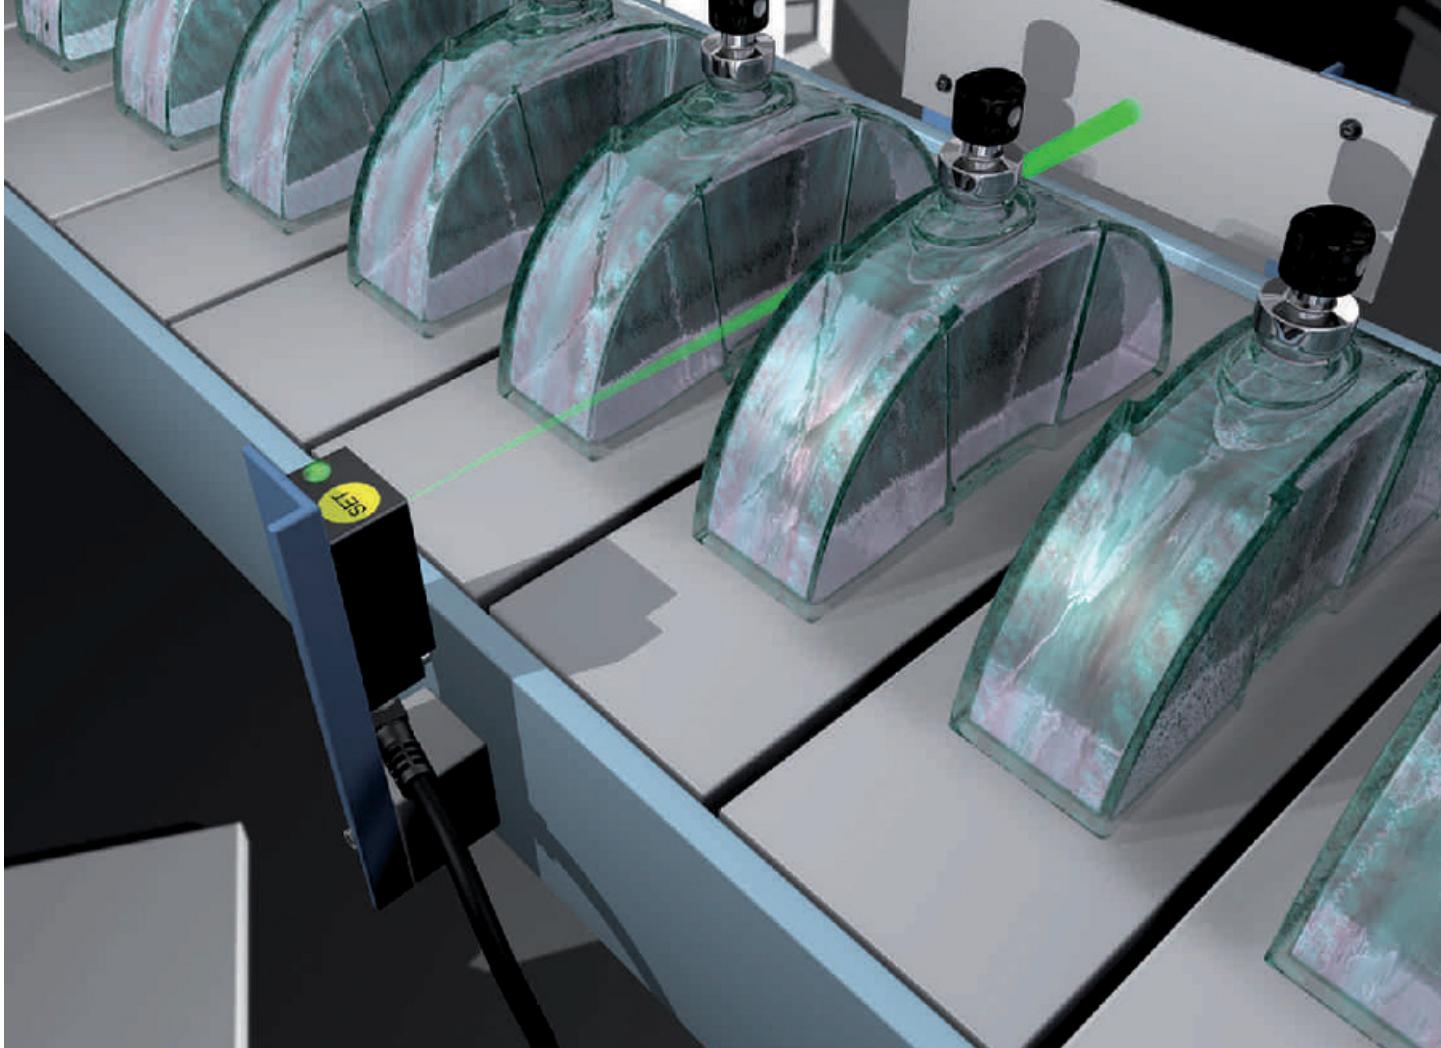

Retro-reflective sensors

- Retro-reflective sensors require a fixed reflector or reference target for operation.

They are ideally suited to reliably detect:

- odd shaped and non-aligned objects
- sound deflecting targets
- sound absorbing materials like cottonwool and foam rubber



Through beam sensors

- Due to their non-pulsed operation, through beam sensors, consisting of emitter and receiver, exhibit the fastest response time of all ultrasonic sensors.


Applications include:

- detection of objects following each other in quick succession
- counting of objects made of materials which are difficult to detect (glass jars, PET bottles)
- monitoring transparent materials like plastic and glass
- film rupture control



Design and operation

A special sonic transducer is used for the ultrasonic proximity sensors, which allows for alternate transmission and reception of sound waves. The sonic waves emitted by the transducer are reflected by an object and received back in the transducer. After having emitted the sound waves, the ultrasonic sensor will switch to receive mode. The time elapsed between emitting and receiving is proportional to the distance of the object from the sensor.

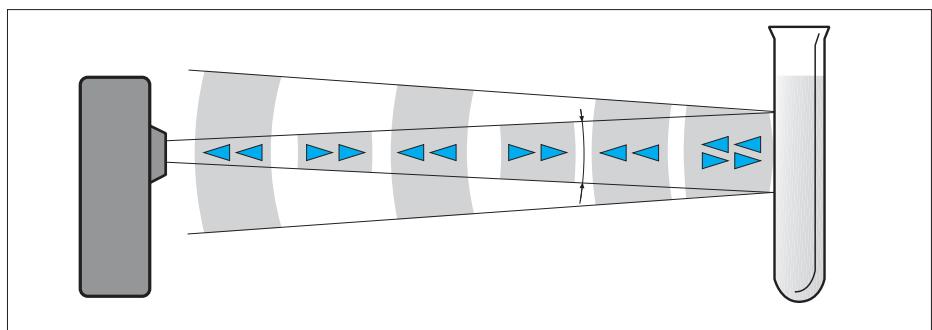

Digital output

Sensing is only possible within the detection area. The required sensing range can be adjusted with the sensor's potentiometer or by electronic Teach-in (Teach-in button or remote Teach-in). If an object is detected within the set area, the output will change state which is visualized by the integrated LED.

Target detection

Sonic waves are best reflected from hard surfaces. Targets may be solids, liquids, granules or powders. In general, ultrasonic sensors are deployed for object detection where optical principles would lack reliability.

Standard target

The standard target is defined as a square flat object of following sizes:

- 15 x 15 mm for Sde up to 250 mm
- 30 x 30 mm for Sde up to 1000 mm
- 100 x 100 mm for Sde > 1000 mm

The target should be mounted perpendicular to the axis of the sensor.

Size

To ensure a reliable object detection, the reflected signal must be large enough. The intensity of the signal depends on the size of the object. Using a standard object, the full scanning distance Sd is available.

Surfaces

Detection of sound absorbent materials will result in a reduction of the maximum sensing distance.

The maximum sensing distance can be achieved as long as the maximum roughness of the object does not exceed 0,2 mm.

Typical sound absorbing materials are:

- foam rubber
- cotton / wool / cloth / felt
- very porous materials

Typical sonic cone profile




Sonic cone profiles


The sonic cone profile charts as found in the spec sheets of this catalog represent the active sensing areas for ultrasonic sensors. The charts demonstrate the short-range sonic side lobes, which widen the sensor's close-range aperture angle. Due to sound absorption and air diffusion, the lobes decrease at longer ranges.

Size, shape, surface properties and the direction of target detection have very high influence on the lateral detecting region of an ultrasonic sensor.

Sonic cone profiles apply to the whole product family, e.g. a 100 - 1000 mm profile is representative for all related sensors of the same sensing range - digital or analog outputs, etc.

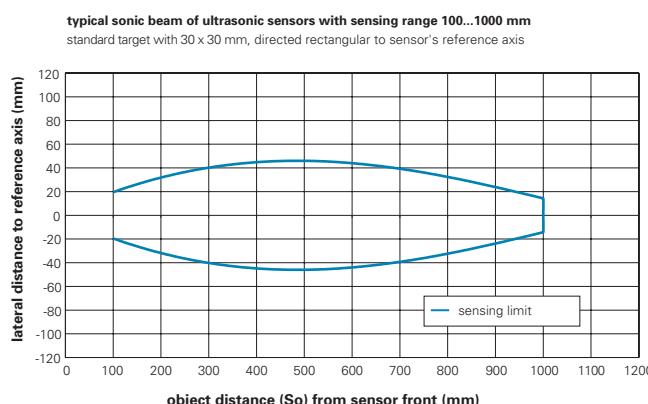

Measuring method

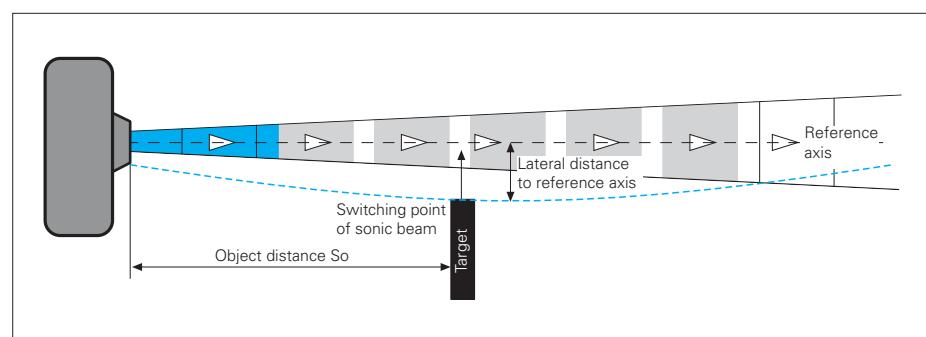

Standard square targets made of steel are used to determine the shape of typical sonic cone profiles.

- 15 x 15 mm for Sde up to 250 mm
- 30 x 30 mm for Sde up to 1000 mm
- 100 x 100 mm for Sde > 1000 mm


The targets are positioned perpendicularly to the sensor's reference axis, approached sideways at different distances. The sonic cone profile is then plotted by connecting the measured points with a line.

The cone shape can vary if round or differently shaped objects are detected.

Mounting



Minimum spacings

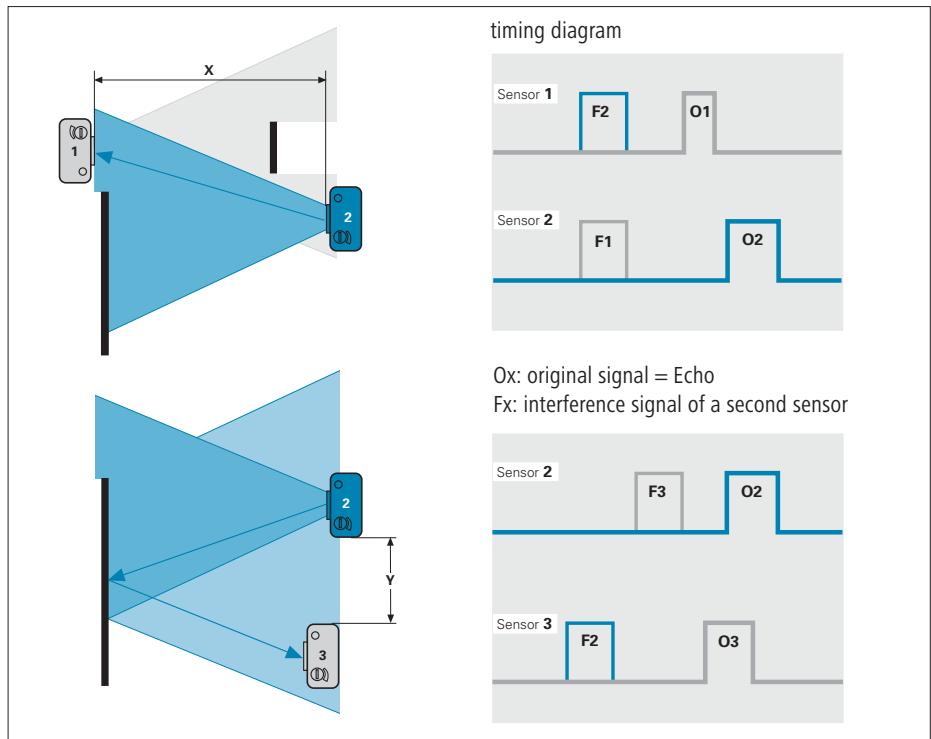

Minimum spacings table

Sensor type	x	y	max. no. of sensors	Action to take	Order reference	max. control wire	Response time
Standard - without multiplex or synch.	$3 \times Sd$	$2 \times Sd$	no limit	none	all standard sensors	-	according to technical specs.
with multiplex feature	$2 \times Sd$	no space required	2	connect control pin	Uxxx xxxx8xx	5 m	2 x technical specs.
with synchronization feature	$3 \times Sd$	$1 \times Sd$	8	connect control pin	Uxxx xxxx7xx	7 m	according to technical specs.

Mounting



Synchronization or Multiplex feature

Synchronization feature

Link the control pin of all sensors within a limited area to each other. This triggers the measurement of all sensors at the same time. Interference signals which arrive later at the sensor due to their longer sensing distance, will be ignored. Up to eight sensors can be synchronized via control pin.

Multiplex feature

Link the control pin of both sensors to each other. While the first sensor is measuring, the second is disabled. After the first measurement is completed, the second sensor is allowed to send and receive its signals. In maximum two sensors can be interconnected. The multiplex function increases the sensor response time to the double of the specified value.

Note: The control pin must be closed on sensors utilizing either the synchronization or multiplex feature. If the feature is not in use the pin must be connected to the following potentials to ensure the standard response time:

Synchronization: Connect the control pin to supply voltage (+Vs)

Multiplex: Connect the control pin to ground (GND)

Adjustment aid

The LED indicates the intensity of the signal which has been reflected by the object, as well as the output's switching state.

LED on

The object is reliably detected with a signal strength reserve of 50 %. The output is switched.

LED off

No target detected, output is not switched.

LED flashing

Unreliable detection of the target. The output is activated / switched.

Teach-in lock

The Teach-in lock is active 5 minutes after power-up or after the end of the last Teach-in process. Teach-in lock is reset by disconnecting the power supply.


The Teach-in lock can be released by briefly switching the main power off.



Angular deflection


Like light waves, a flat even surface will reflect sound waves best - reason why an angled surface might not suffice for accurate target recognition.

The larger the distance between sensor and target, the higher the tilt effect.

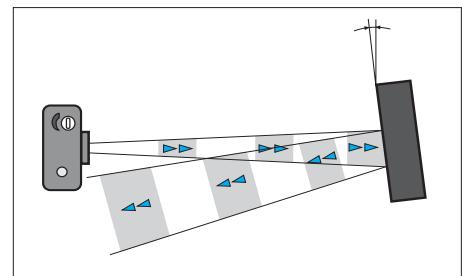


This may also be turned in an advantage when detecting a target from remote, as shown in the illustration.

The reflector must be large enough and have smooth surfaces and edges.

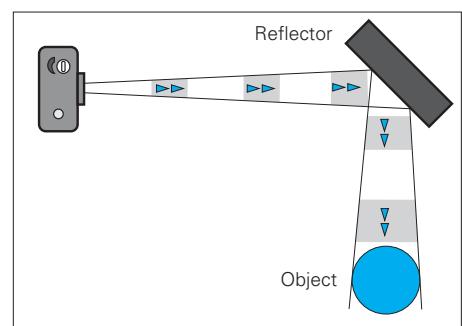

Sonic beam deflector Series 20


- see accessories section

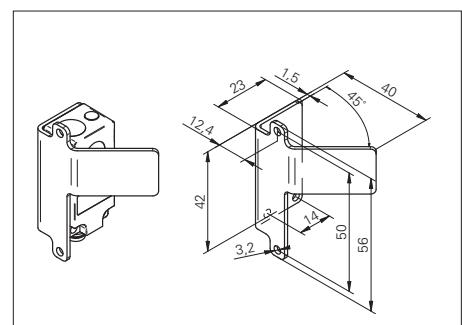

General definitions



Technical definitions and environmental influences

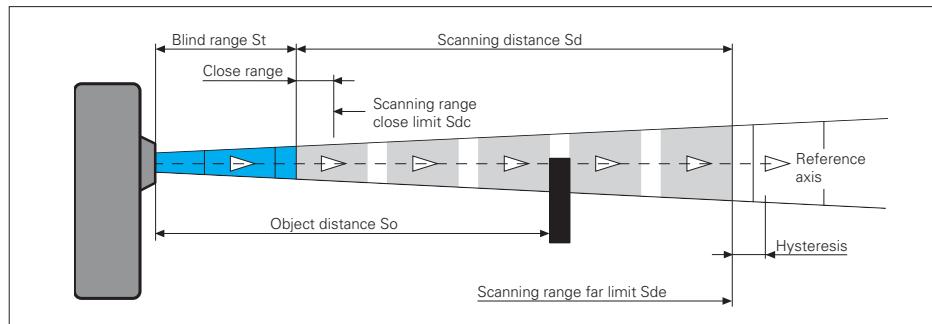

Blind range St

Reliable object recognition is not possible within the blind range (St). Objects within this blind range may cause false switching of the sensor.

Scanning distance Sd

Objects within the scanning distance (Sd) are correctly detected up to the set far limit (Sde) of the scanning distance.

Scanning range close limit Sdc

The close limit (Sdc) can be programmed by a Teach-in button.

Scanning range far limit Sde

By means of a built-in potentiometer or a Teach-in button the user can change the far limit (Sde) of the scanning distance (Sd).

Object distance So

The object distance is defined as the distance between the front end of the sensor and the object itself.

Hysteresis

After recognizing the object the effective scanning distance (Sd) is enlarged in the axial direction by the hysteresis value.

Repeat accuracy

Repeat accuracy is defined as the difference between two subsequent measurements under identical circumstances and with a standard object.

Sensitivity to noise

The extremely high sonic frequency used for ultrasonic sensors ensures that most extraneous noise will not affect operational accuracy. Pressurized air might interfere with the proper operation of the sensor under extreme conditions.

Humidity

A relative humidity up to 90 % has nominal effect on the sensing distance of the sonic sensors. Direct moisture or dirt however may lead to a reduction of the scanning distance Sd.

Air stream

The narrow sonic beam angle may be affected by strong air streams in excess of 10 m/second.

Temperature


Heat radiation from hot targets produces strong air turbulence. This can affect the sonic propagation and hence, the proper recognition of an object.

Temperature drift

The speed of sound depends on temperature. Deviation can be up to 0,18 %/K. Temperature drift of the ambient air is mostly compensated within the sensor itself. The specification for temperature compensation is valid for stationary conditions.



Ultrasonic distance measuring sensors

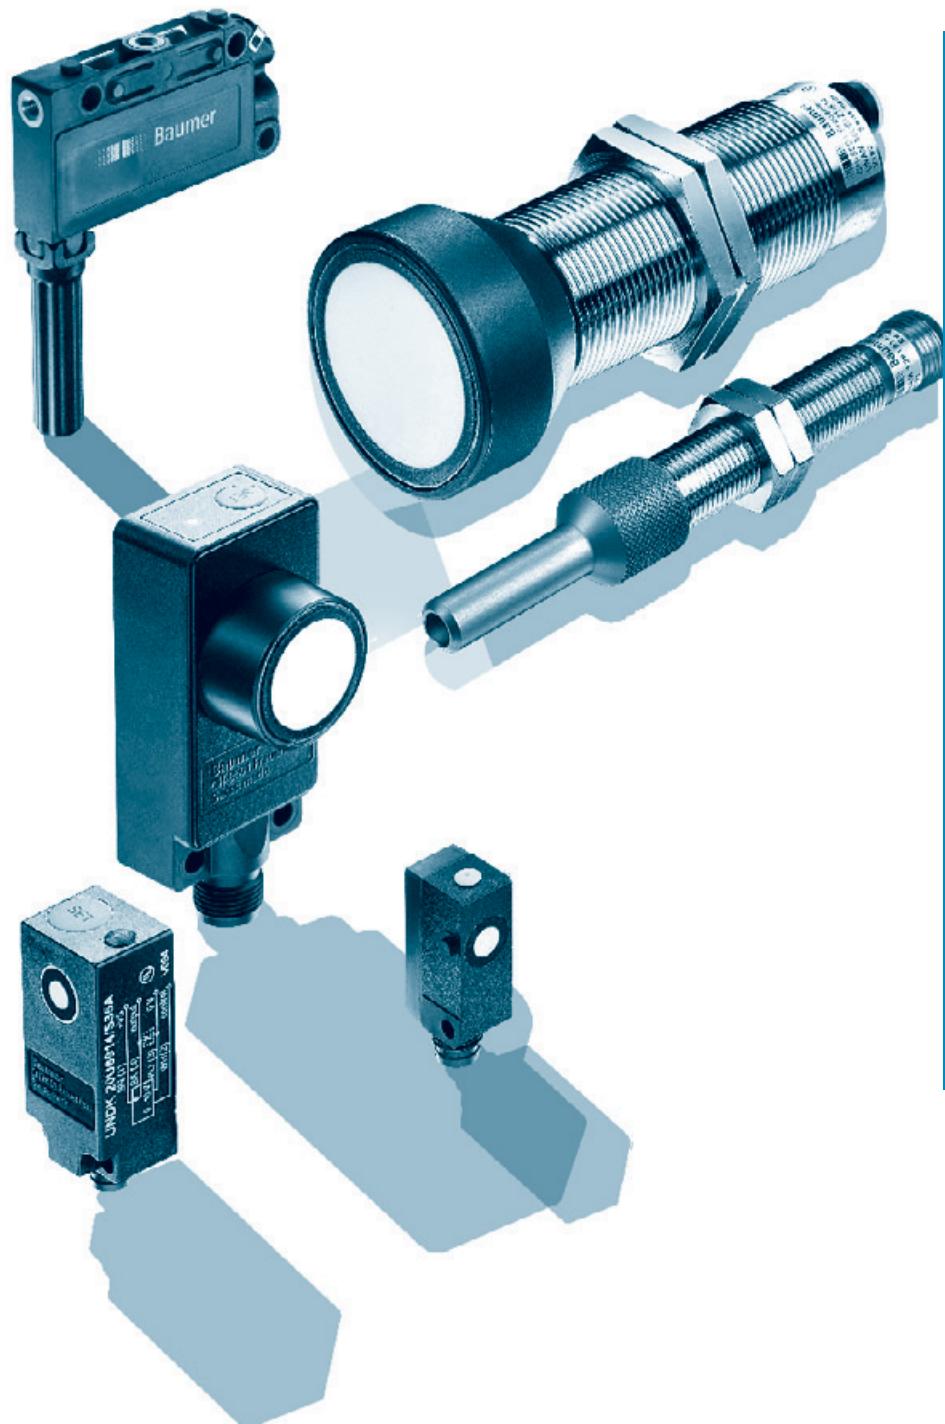


Introduction
Overview
Rectangular designs
Cylindrical designs

Page 22
Page 24
Page 26
Page 44

Ultrasonic distance measuring sensors



Sensors with potentiometer

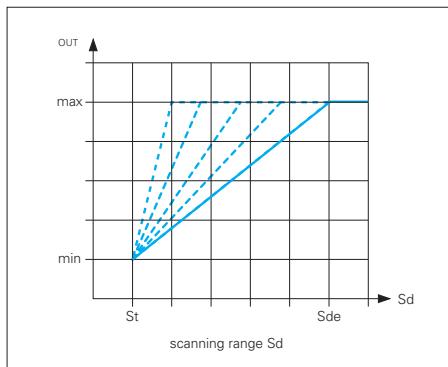


The sensor provides a distance proportional analog current or analog voltage output, allowing simply applied, non-contact distance measurement. The user can change the slope of the output curve using the built-in potentiometer. By doing so, they are able to define the required resolution. Sensor versions, which have a built-in D/A-Converter, generate output signals divided into discrete steps. Applications having long cable runs where there might be EMI or RFI interferences, should use sensors with an analog current output.

Sensors with Teach-in

Adjustment of 0 ... 10 V output function

To switch the sensor into Teach mode, hold the Teach-in button for 2 seconds or more. Successful entry into Teach-mode is signaled by the flashing bicolor LED. Upon release of the Teach button the red LED will flash. Another press on the button will teach in the close limit (Sdc) which is followed by the far limit (Sde). The sensor LED lighting up for 2 seconds will confirm the completed teaching operation. At this point, you may set the close limit (Sdc) by placing the target at the required distance from the sensor (the closest the target will be to the sensor face) and briefly pushing the button or connecting the Teach-in wire with +VS. The LED will then flash Amber. Far limit (Sde) may now be programmed by placing the target at the farthest required distance from the sensor by briefly pressing the button or connecting the Teach-in wire with +VS. Both LEDs will be „on“ for 2 seconds to confirm proper completion of Teach-in process.

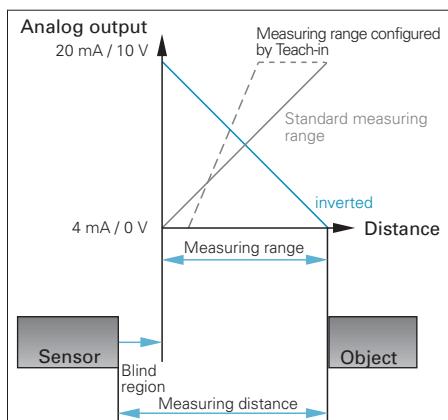

Programmable output curve

Optional on request

Separate digital PNP output with one switching point which may be set using the Teach-in function.

Inverting the output function to 10 ... 0 V

Sensor output signal can be inverted to 10 ... 0 V by teaching the far limit Sde first and the sensor close limit Sdc second.

Restore default settings or improper set up

Press teach-in button and hold for more than 6 seconds. Both sensor LEDs flashing fast indicate the restore operation.

Teach-in lock

The Teach-in function is locked five minutes after power up or five minutes after the end of the last Teach-in process.

Ultrasonic distance measuring sensors



Linearity

Deviations in linearity are mainly generated within the sensor and by changes in ambient temperature. Resolution, temperature drift and repeatability define the linearity error.

Minimum load resistance

The voltage drop across the load resistance is proportional to the current, using a sensor with current output. To ensure a proper functioning of the output stage do not exceed the maximum permissible load resistance as stated in the data sheet.

Resolution

Defines the smallest position change of the object which causes a change in voltage or current at the sensor output.



rectangular designs

product family	UNCK 09	UNCK 09	UNCK 09	UNCK 09	UNCK 09	UNDK 09	UNDK 09
	IO-Link	IO-Link					
width / diameter	8,6 mm	8,6 mm	8,6 mm	8,6 mm	8,6 mm	8,6 mm	8,6 mm
scanning range sd	30 ... 200 mm	30 ... 200 mm	30 ... 200 mm	3 ... 150 mm	3 ... 150 mm	30 ... 200 mm	30 ... 200 mm
adjustment	Teach-in	Teach-in and IO-Link		Teach-in		Teach-in	Teach-in and IO-Link
repeat accuracy	< 0,5 mm	< 0,5 mm	< 0,5 mm	< 0,5 mm	< 0,5 mm	< 0,5 mm	< 0,5 mm
push-pull / IO-Link		■					■
RS 232			■		■		
voltage output	■			■		■	
current output							
operating temperature	0 ... +60 °C	0 ... +60 °C	0 ... +60 °C	0 ... +60 °C	0 ... +60 °C	0 ... +60 °C	0 ... +60 °C
housing material	PA 12	PA 12	PA 12	PA 12	PA 12	PA 12	PA 12
cable PUR 4 x 0,08, 2 m	■	■	■	■	■	■	■
flylead connector M8, L=200 mm	■	■	■	■	■	■	■
connector M8							
page	26	27	28	29	30	31	32

rectangular / cylindrical designs

product family	UNDK 30	UNDK 30	UNDK 30	UNDK 30	UNAM 12	UNAM 12	UNAM 12
special type							
width / diameter	30 mm	30 mm	30 mm	30 mm	12 mm	12 mm	12 mm
scanning range sd	30 ... 250 mm	60 ... 400 mm	100 ... 1000 mm	200 ... 2000 mm	2 ... 82 mm	20 ... 200 mm	60 ... 400 mm
adjustment	Teach-in potentiometer	Teach-in potentiometer	Teach-in potentiometer	Teach-in	external Teach-in	external Teach-in	external Teach-in
repeat accuracy	< 0,5 mm	< 0,5 mm	< 0,5 mm	< 1 mm	< 0,5 mm	< 0,5 mm	< 0,5 mm
voltage output	■	■	■	■	■	■	■
current output	■	■	■	■	■	■	■
operating temperature	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C			
housing material	polyester / die-cast zinc	brass nickel plated	brass nickel plated	brass nickel plated			
cable, 2 m	■	■	■	■			
connector M12	■	■	■	■	■	■	■
page	40	41	42	43	44	45	46

UNDK 09	UNDK 09	UNDK 09	UNDK 10	UNDK 20	UNDK 20	UNDK 20
						
<i>SONUS</i>						
8,6 mm	8,6 mm	8,6 mm	10,4 mm	20 mm	20 mm	20 mm
30 ... 200 mm	3 ... 150 mm	3 ... 150 mm	20 ... 200 mm	20 ... 200 mm	60 ... 400 mm	100 ... 1000 mm
	Teach-in		Teach-in	Teach-in	Teach-in	Teach-in
< 0,5 mm						
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
0 ... +60 °C	0 ... +60 °C	0 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C
PA 12	PA 12	PA 12	plastic (ASA)	polyester	polyester	polyester
■	■	■	■			
■	■	■	■			
■	■	■	■	■	■	■
33	34	35	36	37	38	39

UNAM 18	UNAR 18	UNAR 18	UNAM 30	UNAM 50
				
chemically resistant				
18 mm	18 mm	18 mm	30 mm	30 mm
100 ... 1000 mm	60 ... 400 mm	100 ... 1000 mm	100 ... 1000 mm	400 ... 2500 mm
Teach-in	Teach-in	Teach-in	Teach-in potentiometer	Teach-in
< 0,5 mm	< 0,5 mm	< 0,5 mm	< 0,5 mm	< 1 mm
■	■	■	■	■
■	■	■	■	■
-10 ... +60 °C	0 ... +60 °C	0 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C
brass nickel plated	stainless steel 1.4435 (V4A)	stainless steel 1.4435 (V4A)	brass nickel plated	brass nickel plated
■	■	■	■	■
47	48	49	50	51



Sd = 200 mm



- short response time
- high resolution
- detects the smallest objects

general data

scanning range sd	30 ... 200 mm
scanning range close limit Sdc	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	380 kHz
response time ton	< 35 ms
release time toff	< 35 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
output current	< 15 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	55 mm
depth	24,5 mm


ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


order reference

connection types	
UNCK 09U6914	cable PUR 4 x 0,08, 2 m
UNCK 09U6914/KS35A	fylead connector M8, L=200 mm

dimension drawing

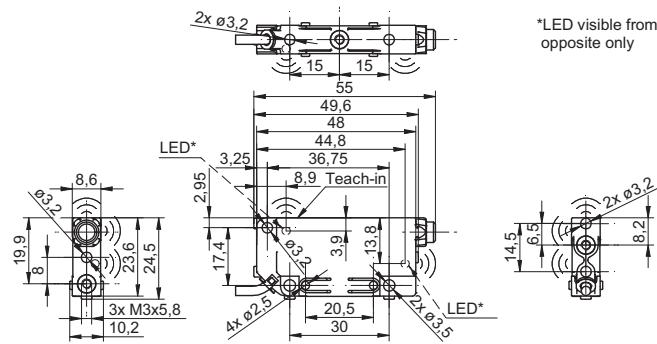


fylead connector version

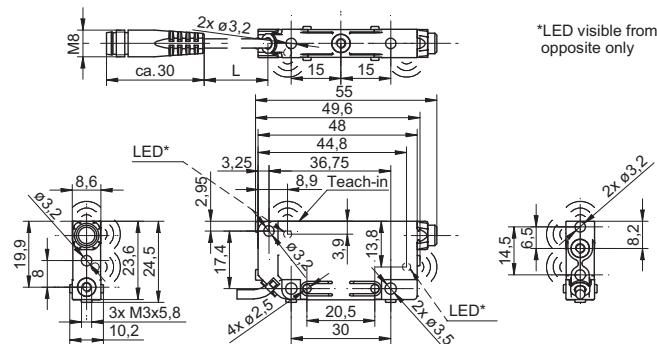

connection diagram



typical sonic cone profile

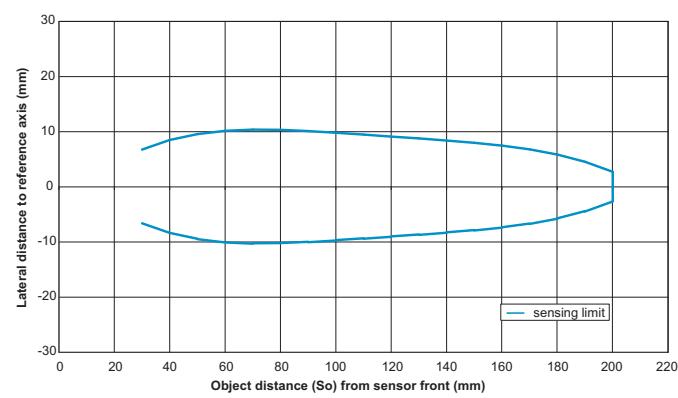

connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	



Sd = 200 mm

IO-Link

- IO-Link
- short response time
- high resolution

**general data**

scanning range sd	30 ... 200 mm
scanning range close limit Sdc	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
repeat accuracy	< 0,5 mm
repeat accuracy (filter active)	< 0,1 mm
resolution	< 0,3 mm
resolution (filter active)	< 0,1 mm
adjustment	Teach-in and IO-Link
sonic frequency	380 kHz
response time ton	< 7 ms
alignment aid	target indication flashing
light indicator	green LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	18 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull / IO-Link
baud rate	38400
short circuit protection	yes
reverse polarity protection	yes

mechanical data



type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	55 mm
depth	24,5 mm

ambient conditions



operating temperature	0 ... +60 °C
protection class	IP 67

order reference

UNCK 09G8914/IO	cable PUR 4 x 0,08, 2 m
UNCK 09G8914/KS35A/IO	flylead connector M8, L=200 mm

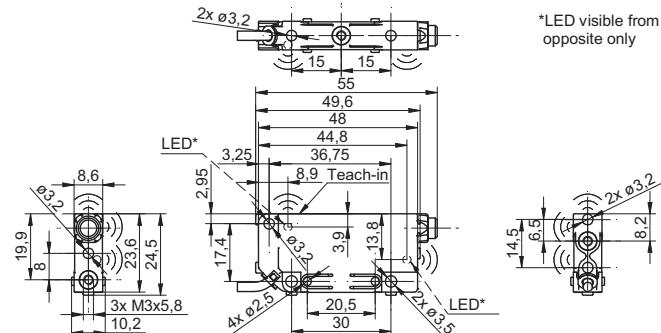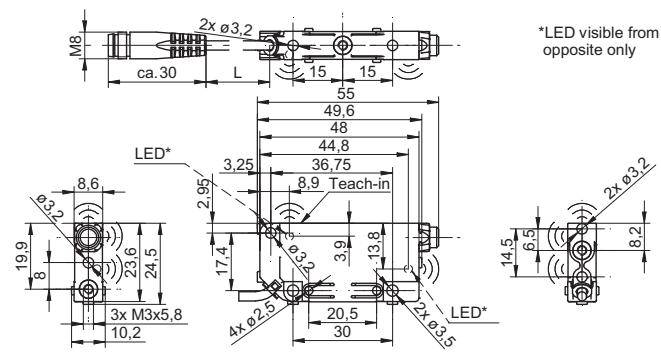connection types**dimension drawing****flylead connector version**

standard cable length 200 mm (L)

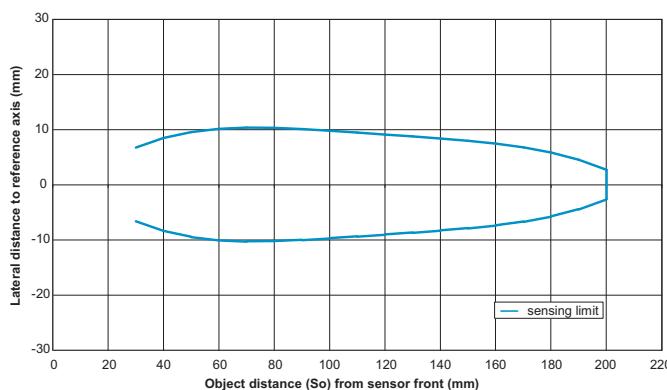connection diagram**typical sonic cone profile****connectors and mating connectors**

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories



Sd = 200 mm



- serial interface RS 232
- high resolution
- short response time

general data

scanning range sd	30 ... 200 mm
scanning range close limit Sdc	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
repeat accuracy	< 0,5 mm
repeat accuracy (filter active)	< 0,1 mm
resolution	< 0,3 mm
resolution (filter active)	< 0,1 mm
sonic frequency	380 kHz
response time ton	< 7 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 0,18 % Sde/K (comp. off, factory set) < 2 % So (compensation on)

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	RS 232
baud rate	115200
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes, Vs to GND

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	55 mm
depth	24,5 mm


ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


order reference

order reference	connection types
UNCK 09T9114	cable PUR 4 x 0,08, 2 m
UNCK 09T9114/KS35A	fylead connector M8, L=200 mm

dimension drawing

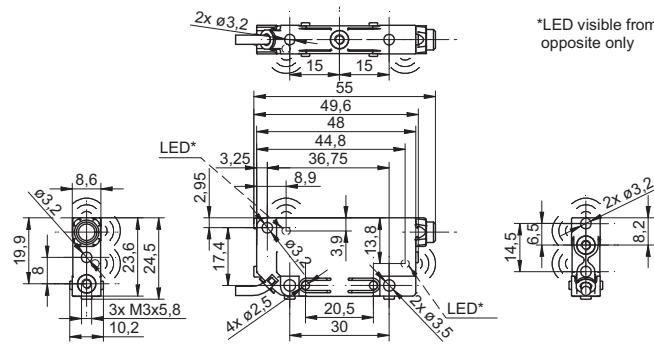

fylead connector version

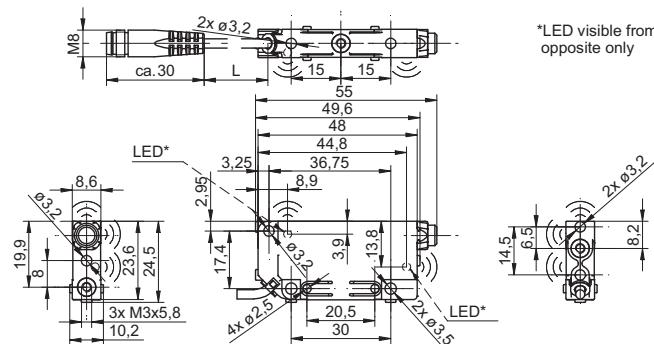


standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

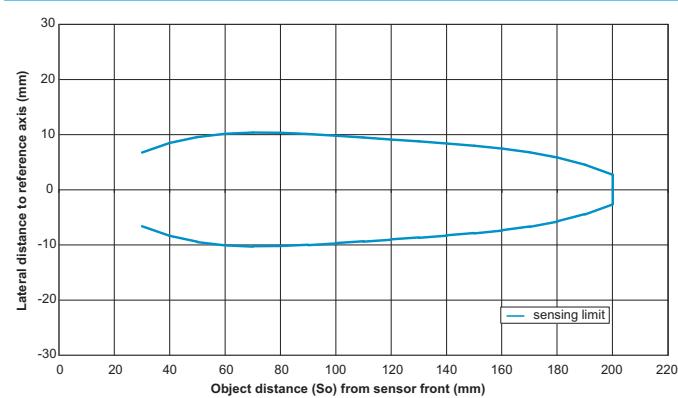

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Sd = 150 mm

- measurement in very small containers
- stackability in a 9 mm pitch
- short response time

**general data**

scanning range sd	3 ... 150 mm
scanning range close limit Sdc	3 ... 150 mm
scanning range far limit Sde	3 ... 150 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	380 kHz
response time ton	< 35 ms
release time toff	< 35 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
output current	< 15 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data





type	rectangular
housing material	PA 12
material (beam columnar)	POM
width / diameter	8,6 mm
height / length	82 mm
depth	24,5 mm

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

order reference

order reference	connection types
UNCK 09U6914/D1	cable PUR 4 x 0,08, 2 m
UNCK 09U6914/KS35AD1	flylead connector M8, L=200 mm

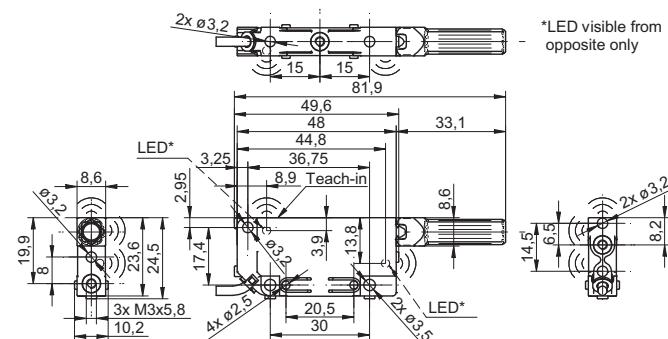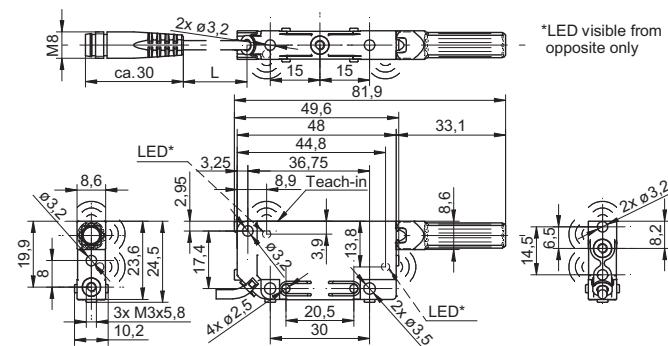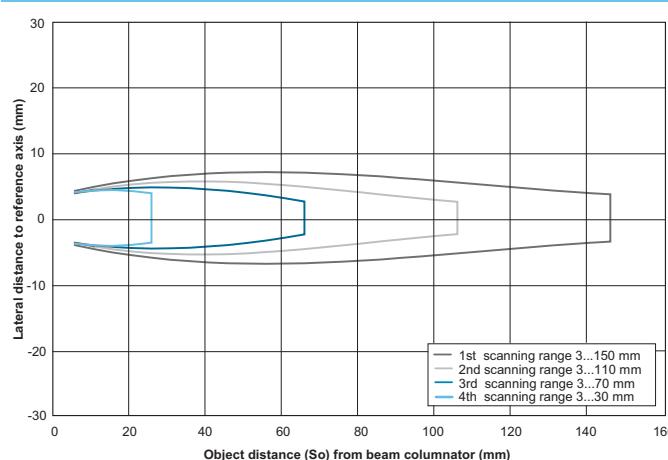dimension drawing**flylead connector version****connection diagram****typical sonic cone profile****connectors and mating connectors**

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories



Sd = 150 mm

- serial interface RS 232
- measurement in very small containers
- high resolution



general data

scanning range sd	3 ... 150 mm
scanning range close limit Sdc	3 ... 150 mm
scanning range far limit Sde	3 ... 150 mm
repeat accuracy	< 0,5 mm
repeat accuracy (filter active)	< 0,1 mm
resolution	< 0,3 mm
resolution (filter active)	< 0,1 mm
sonic frequency	380 kHz
response time ton	< 7 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 0,18 % Sde/K (comp. off, factory set) < 2 % So (compensation on)

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	RS 232
baud rate	115200
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes, Vs to GND

mechanical data


type	rectangular
housing material	PA 12
material (beam columnator)	POM
width / diameter	8,6 mm
height / length	82 mm
depth	24,5 mm

ambient conditions


operating temperature	0 ... +60 °C
protection class	IP 67

order reference	connection types
UNCK 09T9114/D1	cable PUR 4 x 0,08, 2 m
UNCK 09T9114/KS35AD1	fylead connector M8, L=200 mm

dimension drawing

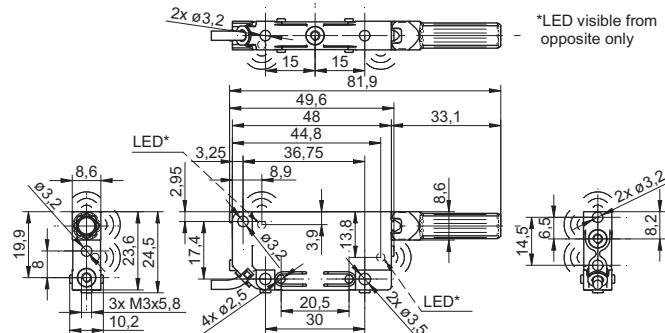


fylead connector version

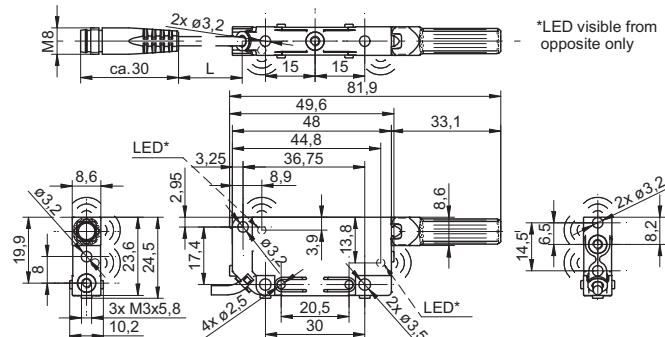


standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

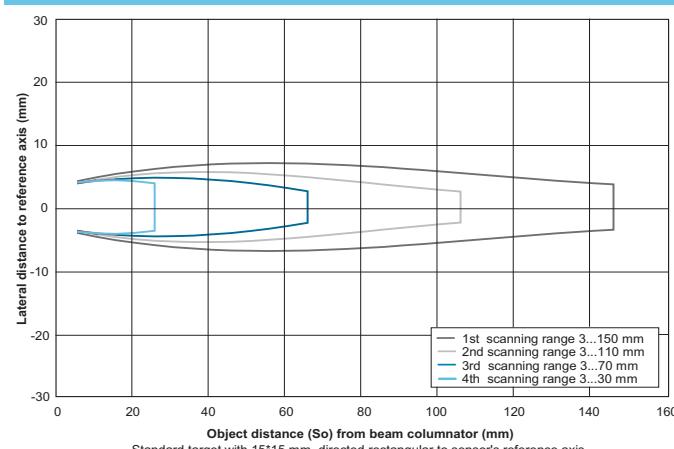

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories



Sd = 200 mm



- short response time
- internal and external Teach-in
- detects the smallest objects

general data

scanning range sd	30 ... 200 mm
scanning range close limit Sdc	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	380 kHz
response time ton	< 35 ms
release time toff	< 35 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
output current	< 15 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data



type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	48,8 mm
depth	30,5 mm

ambient conditions



operating temperature	0 ... +60 °C
protection class	IP 67

order reference

order reference	connection types
UNDK 09U6914	cable PUR 4 x 0,08, 2 m
UNDK 09U6914/KS35A	flylead connector M8, L=200 mm

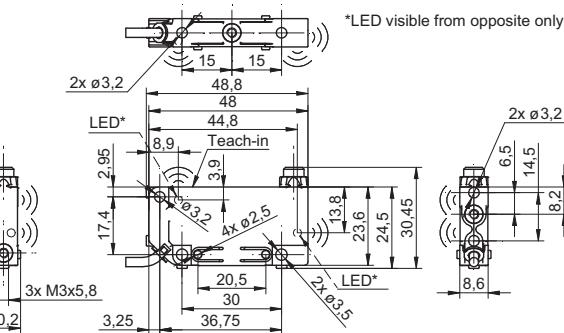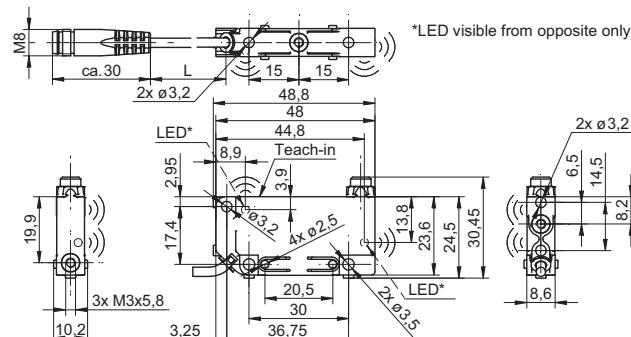dimension drawing**flylead connector version**

standard cable length 200 mm (L)

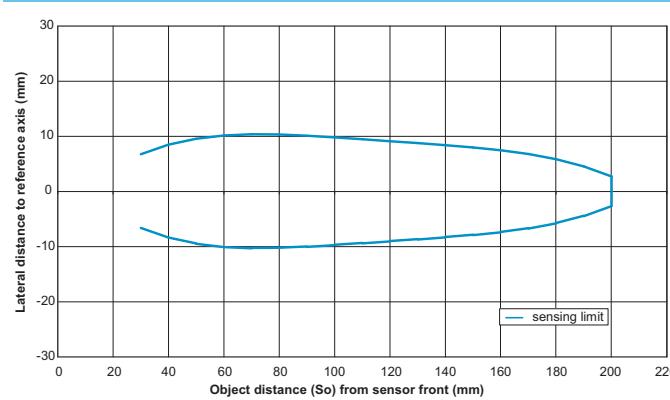connection diagram**typical sonic cone profile****connectors and mating connectors**

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	



Sd = 200 mm

IO-Link

- IO-Link
- short response time
- high resolution



general data

scanning range sd	30 ... 200 mm
scanning range close limit Sdc	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
repeat accuracy	< 0,5 mm
repeat accuracy (filter active)	< 0,1 mm
resolution	< 0,3 mm
resolution (filter active)	< 0,1 mm
adjustment	Teach-in and IO-Link
sonic frequency	380 kHz
response time ton	< 7 ms
alignment aid	target indication flashing
light indicator	green LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	18 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull / IO-Link
baud rate	38400
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	48,8 mm
depth	30,5 mm

ambient conditions


operating temperature	0 ... +60 °C
protection class	IP 67

order reference


UNDK 09G8914/IO	connection types
UNDK 09G8914/KS35A/IO	cable PUR 4 x 0,08, 2 m

UNDK 09G8914/KS35A/IO	connection types
	flylead connector M8, L=200 mm


dimension drawing

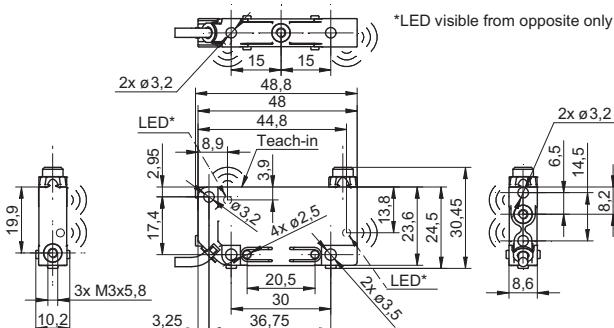


flylead connector version

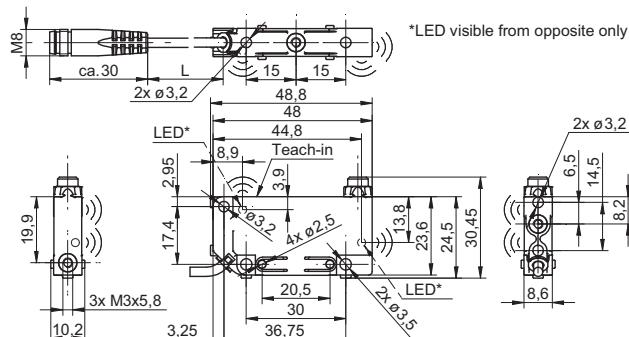

connection diagram



typical sonic cone profile

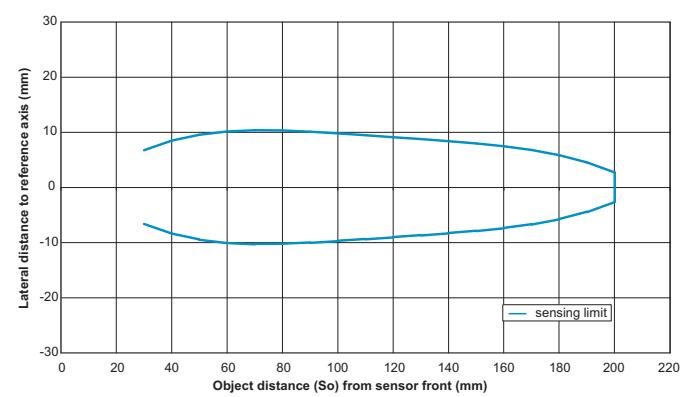

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Sd = 200 mm

- serial interface RS 232
- high resolution
- short response time

**general data**

scanning range sd	30 ... 200 mm
scanning range close limit Sdc	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
repeat accuracy	< 0,5 mm
repeat accuracy (filter active)	< 0,1 mm
resolution	< 0,3 mm
resolution (filter active)	< 0,1 mm
sonic frequency	380 kHz
response time ton	< 7 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 0,18 % Sde/K (comp. off, factory set) < 2 % So (compensation on)

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	RS 232
baud rate	115200
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes, Vs to GND

mechanical data



type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	48,8 mm
depth	30,5 mm

ambient conditions



operating temperature	0 ... +60 °C
protection class	IP 67

order reference**connection types**

UNDK 09T9114	cable PUR 4 x 0,08, 2 m
UNDK 09T9114/KS35A	flylead connector M8, L=200 mm

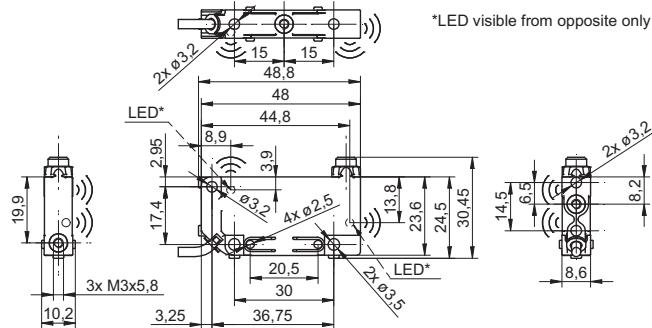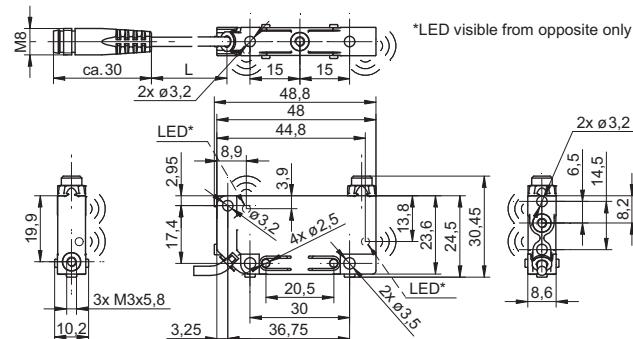dimension drawing**flylead connector version**

standard cable length 200 mm (L)

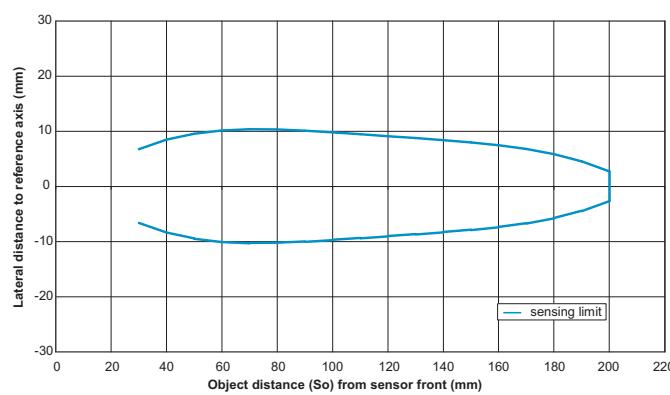connection diagram**typical sonic cone profile****connectors and mating connectors**

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories



Sd = 150 mm



- measurement in very small containers
- stackability in a 9 mm pitch
- short response time

general data

scanning range sd	3 ... 150 mm
scanning range close limit Sdc	3 ... 150 mm
scanning range far limit Sde	3 ... 150 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	380 kHz
response time ton	< 35 ms
release time toff	< 35 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
output current	< 15 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
material (beam columnator)	POM
width / diameter	8,6 mm
height / length	48,8 mm
depth	57,7 mm


ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


order reference

order reference	connection types
UNDK 09U6914/D1	cable PUR 4 x 0,08, 2 m
UNDK 09U6914/KS35AD1	flylead connector M8, L=200 mm

dimension drawing

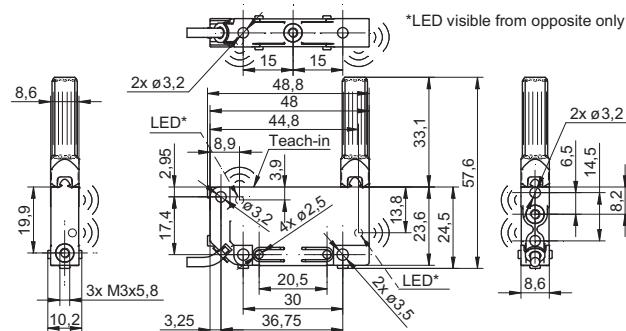


flylead connector version

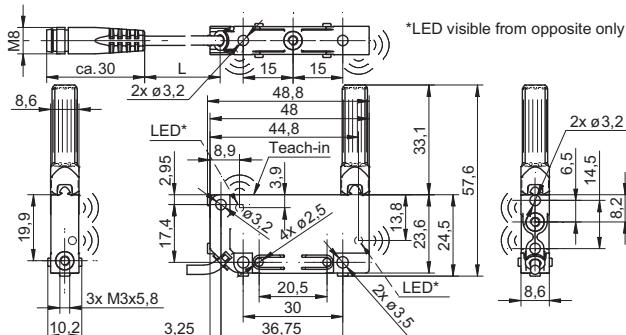


standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

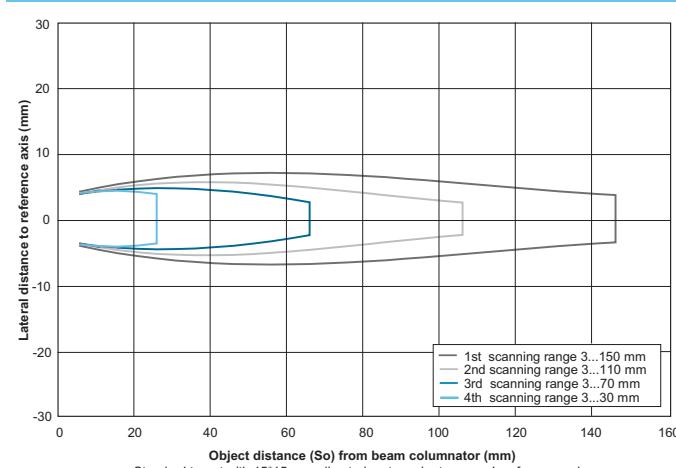

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Sd = 150 mm

- serial interface RS 232
- measurement in very small containers
- high resolution

**general data**

scanning range sd	3 ... 150 mm
scanning range close limit Sdc	3 ... 150 mm
scanning range far limit Sde	3 ... 150 mm
repeat accuracy	< 0,5 mm
repeat accuracy (filter active)	< 0,1 mm
resolution	< 0,3 mm
resolution (filter active)	< 0,1 mm
sonic frequency	380 kHz
response time ton	< 7 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 0,18 % Sde/K (comp. off, factory set) < 2 % So (compensation on)

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	RS 232
baud rate	115200
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes, Vs to GND



mechanical data

type	rectangular
housing material	PA 12
material (beam columnator)	POM
width / diameter	8,6 mm
height / length	48,8 mm
depth	57,7 mm


ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

order reference	connection types
UNDK 09T9114/D1	cable PUR 4 x 0,08, 2 m
UNDK 09T9114/KS35AD1	flylead connector M8, L=200 mm

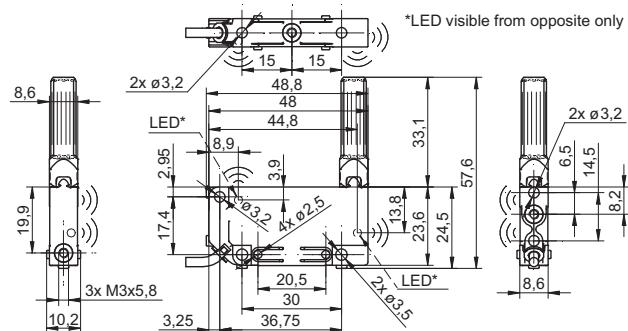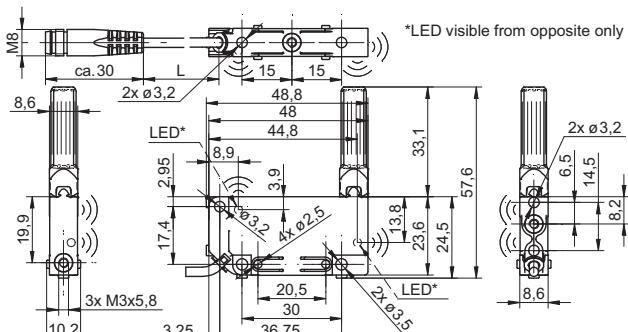dimension drawing**flylead connector version**

standard cable length 200 mm (L)

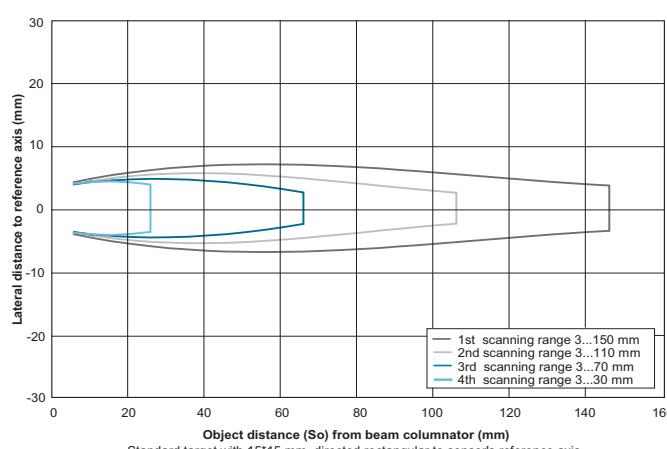connection diagram**typical sonic cone profile****connectors and mating connectors**

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories



Sd = 200 mm

- compact housing
- very low mass (4 g)
- high resolution



general data

scanning range sd	20 ... 200 mm
scanning range close limit Sdc	20 ... 200 mm
scanning range far limit Sde	20 ... 200 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	380 kHz
response time ton	< 60 ms
release time toff	< 60 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	plastic (ASA)
width / diameter	10,4 mm
height / length	27 mm
depth	14 mm


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


order reference

connection types	
UNDK 10U6914	cable PUR 4 x 0,08, 2 m
UNDK 10U6914/KS35A	flylead connector M8, L=200 mm
UNDK 10U6914/S35A	connector M8

dimension drawings

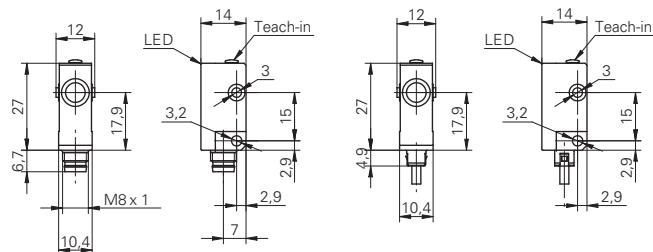


flylead connector version




standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

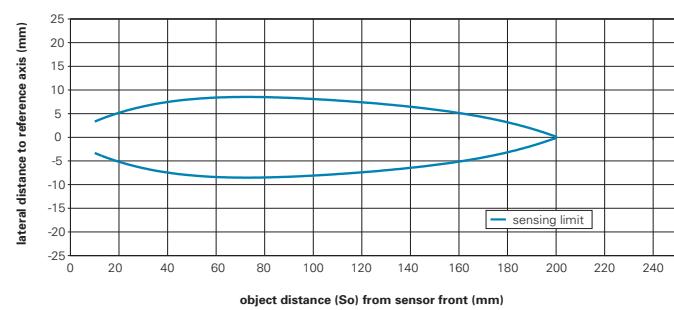

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10150326	Sensofix series 10 / series 20
10133792	Mounting bracket series 10 (L design)
10114501	Mounting bracket series 10 (U design)
10162083	Mounting panel for sensors series 10
10162376	Sonic beam deflector for ultrasonic sensors series 10

for details: see accessories section



Sd = 200 mm

- internal and external Teach-in
- 0 ... 10 V / 4 ... 20 mA invertible
- small sonic beam angle



general data

scanning range sd	20 ... 200 mm
scanning range close limit Sdc	20 ... 200 mm
scanning range far limit Sde	20 ... 200 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	380 kHz
response time ton	< 30 ms
release time toff	< 30 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	55 mA
output signal	4 ... 20 mA / 20 ... 4 mA
load resistance +Vs max.	< 1100 Ohm

load resistance +Vs min.

load resistance +Vs min.	< 400 Ohm
--------------------------	-----------


mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


dimension drawing



connection diagram



typical sonic cone profile

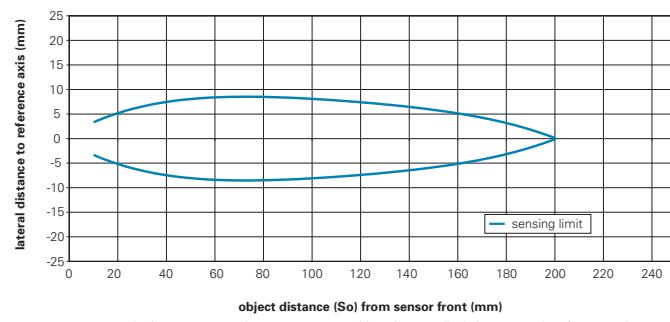

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10150326 Sensofix series 10 / series 20

10153290 Sonic beam deflector series 20

for details: see accessories section

order reference

order reference	output circuit
UNDK 20I6914/S35A	current output
UNDK 20U6914/S35A	voltage output



Sd = 400 mm

- internal and external Teach-in
- 0 ... 10 V / 4 ... 20 mA invertible
- wide sonic beam angle



general data

scanning range sd	60 ... 400 mm
scanning range close limit Sdc	60 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	290 kHz
response time ton	< 60 ms
release time toff	< 60 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	55 mA
output signal	4 ... 20 mA / 20 ... 4 mA
load resistance +Vs max.	< 1100 Ohm
load resistance +Vs min.	< 400 Ohm

mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


order reference

UNDK 20I6912/S35A	current output
UNDK 20U6912/S35A	voltage output


dimension drawing



connection diagram



typical sonic cone profile

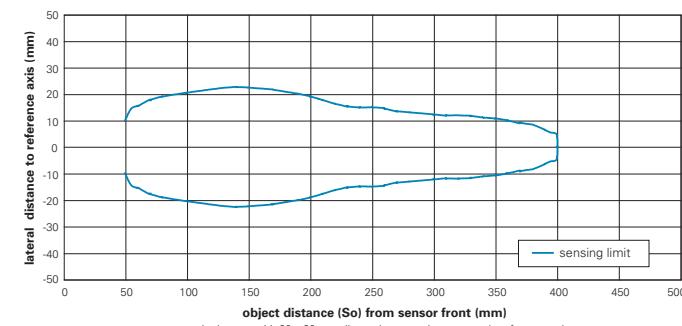

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10150326 Sensofix series 10 / series 20

10153290 Sonic beam deflector series 20

for details: see accessories section



Sd = 1000 mm

- internal and external Teach-in
- 0 ... 10 V / 4 ... 20 mA invertible
- long sensing range



general data

scanning range sd	100 ... 1000 mm
scanning range close limit Sdc	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	240 kHz
response time ton	< 80 ms
release time toff	< 80 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	55 mA
output signal	4 ... 20 mA / 20 ... 4 mA
load resistance +Vs max.	< 1100 Ohm


mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


dimension drawing



connection diagram



typical sonic cone profile

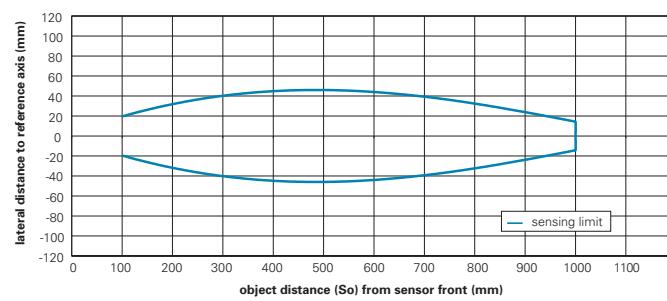

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10150326 Sensofix series 10 / series 20

10153290 Sonic beam deflector series 20

for details: see accessories section

order reference

order reference	output circuit
UNDK 20I6903/S35A	current output
UNDK 20U6903/S35A	voltage output



Sd = 250 mm

- Teach-in or potentiometer
- 0 ... 10 V / 4 ... 20 mA
- signals of Teach-in version invertible



general data

scanning range sd	30 ... 250 mm
scanning range far limit Sde	30 ... 250 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
sonic frequency	300 kHz
response time ton	< 50 ms
release time toff	< 50 ms
alignment aid	target indication flashing
temperature drift	< 2 % of distance to target So
potentiometer	
light indicator	LED green

Teach-in

scanning range close limit Sdc	30 ... 250 mm
light indicator	yellow LED / red LED

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
------------------------------------	-------

current output

current consumption max. (no load)	55 mA
load resistance +Vs max.	< 1100 Ohm
load resistance +Vs min.	< 400 Ohm


mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions


operating temperature	-10 ... +60 °C
protection class	IP 67

dimension drawings

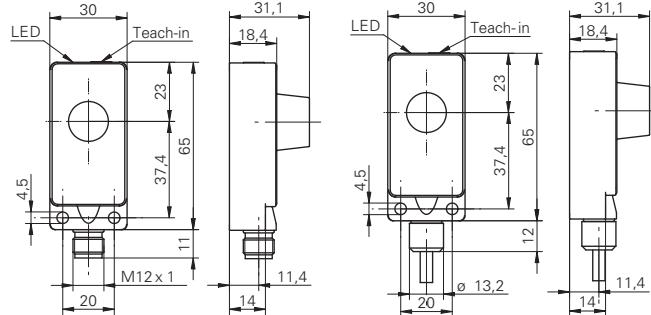


Teach-in = Teach-in or potentiometer

connection diagram



typical sonic cone profile

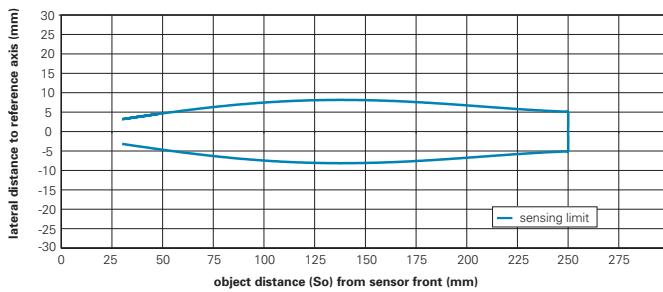

connectors and mating connectors

ESG 34SH0200 Connector M12, 3 pin, straight, 2 m

ESW 33SH0200 Connector M12, 3 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10152386 Sensofix series 30

10163979 Converter 3-point (M12)

for details: see accessories section

order reference	adjustment	output circuit	output signal	connection types
UNDK 30I6113	Teach-in	current output	4 ... 20 mA / 20 ... 4 mA	cable, 2 m
UNDK 30I6113/S14	Teach-in	current output	4 ... 20 mA / 20 ... 4 mA	connector M12
UNDK 30U6113	Teach-in	voltage output	0 ... 10 V / 10 ... 0 V	cable, 2 m
UNDK 30U6113/S14	Teach-in	voltage output	0 ... 10 V / 10 ... 0 V	connector M12
UNDK 30U9113	potentiometer	voltage output	0 ... 10 VDC	cable, 2 m
UNDK 30U9113/S14	potentiometer	voltage output	0 ... 10 VDC	connector M12



Sd = 400 mm

- Teach-in or potentiometer
- 0 ... 10 V / 4 ... 20 mA
- signals of Teach-in version invertible



general data

scanning range sd	60 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
sonic frequency	400 kHz
response time ton	< 60 ms
release time toff	< 60 ms
alignment aid	target indication flashing
temperature drift	< 2 % of distance to target So

potentiometer

light indicator	LED green
-----------------	-----------

Teach-in

scanning range close limit Sdc	60 ... 400 mm
light indicator	yellow LED / red LED

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
------------------------------------	-------

current output

current consumption max. (no load)	55 mA
load resistance +Vs max.	< 1100 Ohm
load resistance +Vs min.	< 400 Ohm


mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions


operating temperature	-10 ... +60 °C
protection class	IP 67

dimension drawings

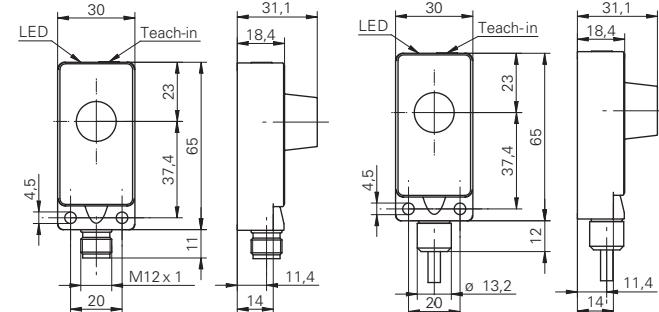


Teach-in = Teach-in or potentiometer

connection diagram



typical sonic cone profile

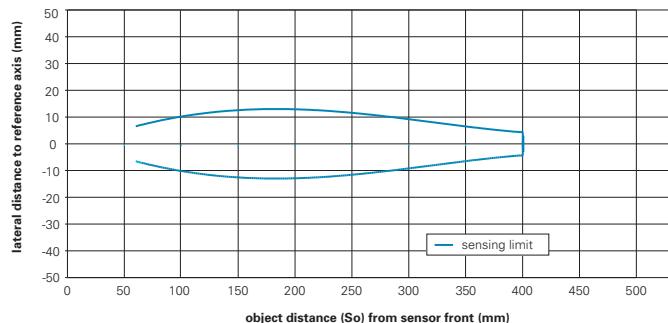

standard target with 30 x 30mm, directed rectangular to sensor's reference axis

connectors and mating connectors

ESG 34SH0200 Connector M12, 3 pin, straight, 2 m

ESW 33SH0200 Connector M12, 3 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10152386 Sensofix series 30

10163979 Converter 3-point (M12)

for details: see accessories section

order reference	adjustment	output circuit	output signal	connection types
UNDK 30I6112	Teach-in	current output	4 ... 20 mA / 20 ... 4 mA	cable, 2 m
UNDK 30I6112/S14	Teach-in	current output	4 ... 20 mA / 20 ... 4 mA	connector M12
UNDK 30U6112	Teach-in	voltage output	0 ... 10 V / 10 ... 0 V	cable, 2 m
UNDK 30U6112/S14	Teach-in	voltage output	0 ... 10 V / 10 ... 0 V	connector M12
UNDK 30U9112	potentiometer	voltage output	0 ... 10 VDC	cable, 2 m
UNDK 30U9112/S14	potentiometer	voltage output	0 ... 10 VDC	connector M12



Sd = 1000 mm

- Teach-in or potentiometer
- 0 ... 10 V / 4 ... 20 mA
- signals of Teach-in version invertible



general data

scanning range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
sonic frequency	240 kHz
response time ton	< 80 ms
release time toff	< 80 ms
alignment aid	target indication flashing
temperature drift	< 2 % of distance to target So

potentiometer

light indicator	LED green
-----------------	-----------

Teach-in

scanning range close limit Sdc	100 ... 1000 mm
light indicator	yellow LED / red LED

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
------------------------------------	-------

current output

current consumption max. (no load)	55 mA
load resistance +Vs max.	< 1100 Ohm
load resistance +Vs min.	< 400 Ohm


mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions


operating temperature	-10 ... +60 °C
protection class	IP 67

dimension drawings

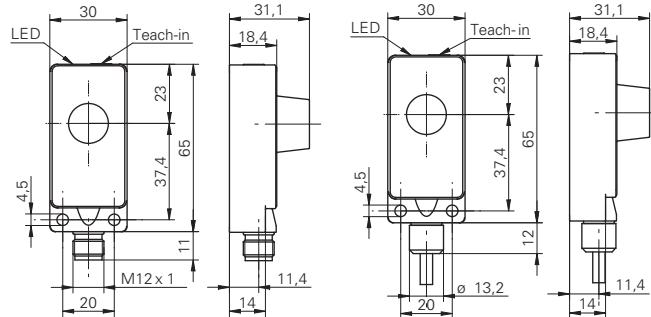


Teach-in = Teach-in or potentiometer

connection diagram



typical sonic cone profile

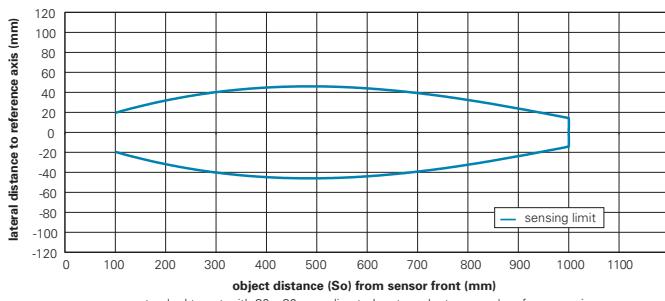

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10152386 Sensofix series 30

10163979 Converter 3-point (M12)

for details: see accessories section



Sd = 2000 mm

- Teach-in
- 0 ... 10 V / 4 ... 20 mA
- output signals invertible

general data

scanning range sd	200 ... 2000 mm
scanning range close limit Sdc	200 ... 2000 mm
scanning range far limit Sde	200 ... 2000 mm
repeat accuracy	< 1 mm
resolution	< 0,5 mm
adjustment	Teach-in
sonic frequency	200 kHz
response time ton	< 150 ms
release time toff	< 150 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	55 mA
output signal	4 ... 20 mA / 20 ... 4 mA
load resistance +Vs max.	< 1100 Ohm

load resistance +Vs min. < 400 Ohm

mechanical data


type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions


operating temperature	-10 ... +60 °C
protection class	IP 67




dimension drawings

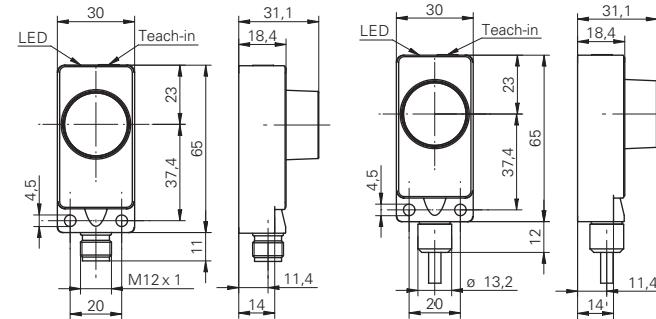

connection diagram



typical sonic cone profile

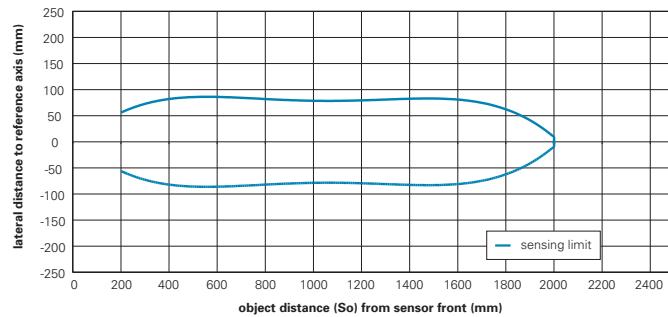

standard target with 100 x 100 mm, positioned perpendicularly to sensor's reference axis

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10152386 Sensofix series 30

10163979 Converter 3-point (M12)

for details: see accessories section

order reference	output circuit	connection types
UNDK 30I6104/S14	current output	connector M12
UNDK 30U6104	voltage output	cable, 2 m
UNDK 30U6104/S14	voltage output	connector M12



Sd = 82 mm

- external Teach-in
- with beam columnator for measurement in very small containers



general data

scanning range sd	2 ... 82 mm
scanning range close limit Sdc	2 ... 82 mm
scanning range far limit Sde	2 ... 82 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	external Teach-in
sonic frequency	380 kHz
response time ton	< 30 ms
release time toff	< 30 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	88 mm
connection types	connector M12


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


order reference

UNAM 12U9914/S14D


dimension drawing



connection diagram



typical sonic cone profile

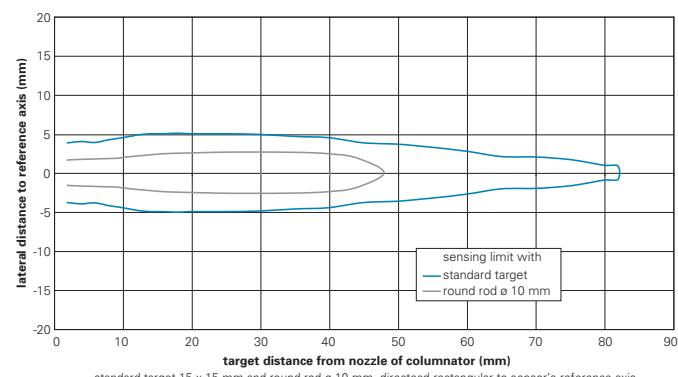

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10151720 Sensofix series 12 round

10141584 Teach-in Adapter M12

10163979 Converter 3-point (M12)

for details: see accessories section



Sd = 200 mm

- external Teach-in
- 0 ... 10 V / 0 ... 10 mA invertible
- Teach-in adapter



general data

scanning range sd	20 ... 200 mm
scanning range close limit Sdc	20 ... 200 mm
scanning range far limit Sde	20 ... 200 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	external Teach-in
sonic frequency	380 kHz
response time ton	< 30 ms
release time toff	< 30 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	45 mA
output signal	0 ... 10 mA / 10 ... 0 mA
load resistance +Vs max.	< 1100 Ohm

load resistance +Vs min.

load resistance +Vs min.	< 400 Ohm
--------------------------	-----------


mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	70 mm
connection types	connector M12


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


dimension drawing



connection diagram



typical sonic cone profile

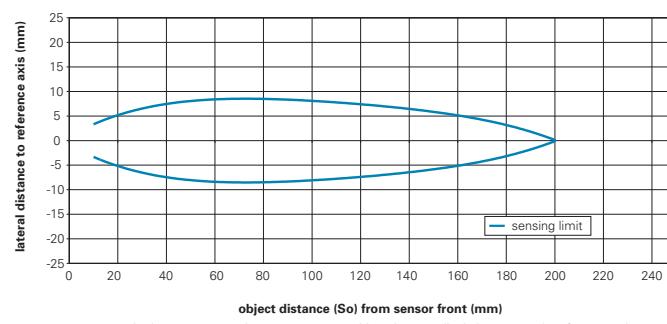

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10151720 Sensofix series 12 round

10141584 Teach-in Adapter M12

10163979 Converter 3-point (M12)

for details: see accessories section

order reference

UNAM 12I9914/S14	output circuit
UNAM 12U9914/S14	current output

UNAM 12I9914/S14	current output
UNAM 12U9914/S14	voltage output



Sd = 400 mm

- external Teach-in
- 0 ... 10 V / 0 ... 10 mA invertible
- Teach-in adapter



general data

scanning range sd	60 ... 400 mm
scanning range close limit Sdc	60 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	external Teach-in
sonic frequency	290 kHz
response time ton	< 60 ms
release time toff	< 60 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	45 mA
output signal	0 ... 10 mA / 10 ... 0 mA
load resistance +Vs max.	< 1100 Ohm
load resistance +Vs min.	< 400 Ohm

mechanical data


type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	70 mm
connection types	connector M12

ambient conditions


operating temperature	-10 ... +60 °C
protection class	IP 67

order reference	output circuit
UNAM 12I9912/S14	current output
UNAM 12U9912/S14	voltage output


dimension drawing



connection diagram



typical sonic cone profile

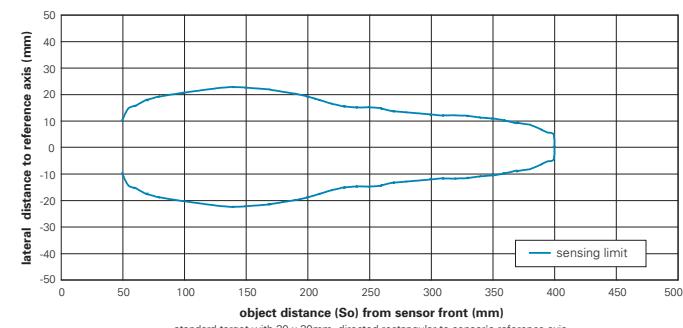

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10151720 Sensofix series 12 round

10141584 Teach-in Adapter M12

10163979 Converter 3-point (M12)

for details: see accessories section



Sd = 1000 mm

- internal and external Teach-in
- 0 ... 10 V / 4 ... 20 mA
- output signals invertible



general data

scanning range sd	100 ... 1000 mm
scanning range close limit Sdc	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	240 kHz
response time ton	< 80 ms
release time toff	< 80 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	55 mA
output signal	4 ... 20 mA / 20 ... 4 mA
load resistance +Vs max.	< 1100 Ohm


mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	18 mm
height / length	90 mm
connection types	connector M12


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


dimension drawing



connection diagram



typical sonic cone profile

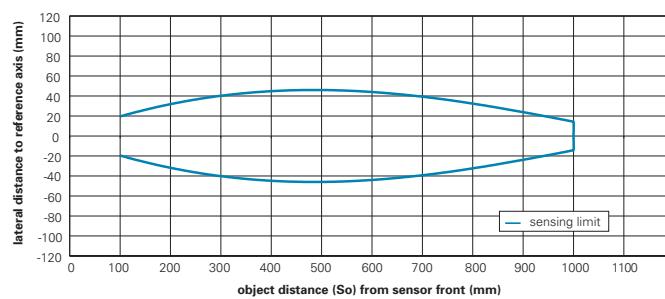

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10151658 Sensofix series 18

10164264 Sonic beam deflector series 18 rectangular

10163979 Converter 3-point (M12)

for details: see accessories section

order reference

UNAM 18I6903/S14	output circuit
UNAM 18U6903/S14	voltage output



Sd = 400 mm

- internal and external Teach-in
- sensorfront chemically resistant
- stainless steel housing



general data

special type	chemically resistant
scanning range sd	60 ... 400 mm
scanning range close limit Sdc	60 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	400 kHz
response time ton	< 60 ms
release time toff	< 60 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	55 mA
output signal	4 ... 20 mA / 20 ... 4 mA
load resistance +Vs max.	< 1100 Ohm
load resistance +Vs min.	< 400 Ohm

mechanical data


type	cylindrical threaded
housing material	stainless steel 1.4435 (V4A)
coating active face	Parylene
material O-ring	FFKM
front of sensor durable against pressure	6 bar, 20'000 cycle
width / diameter	18 mm
height / length	91,5 mm
connection types	connector M12

ambient conditions


operating temperature	0 ... +60 °C
protection class	IP 67

order reference	output circuit
UNAR 18I6912/S14G	current output
UNAR 18U6912/S14G	voltage output


dimension drawing



connection diagram



typical sonic cone profile

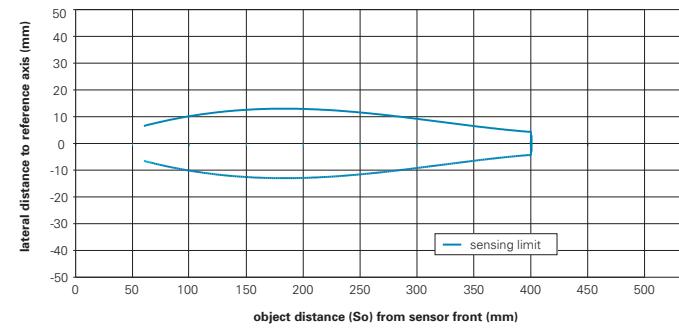

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10151658 Sensofix series 18

10164264 Sonic beam deflector series 18 rectangular

10163979 Converter 3-point (M12)

for details: see accessories section



Sd = 1000 mm

- internal and external Teach-in
- sensorfront chemically resistant
- stainless steel housing



general data

special type	chemically resistant
scanning range sd	100 ... 1000 mm
scanning range close limit Sdc	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	240 kHz
response time ton	< 80 ms
release time toff	< 80 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	55 mA
output signal	4 ... 20 mA / 20 ... 4 mA
load resistance +Vs max.	< 1100 Ohm


mechanical data

type	cylindrical threaded
housing material	stainless steel 1.4435 (V4A)
coating active face	Parylene
material O-ring	FFKM
front of sensor durable against pressure	6 bar, 20'000 cycle
width / diameter	18 mm
height / length	91,5 mm
connection types	connector M12


ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


dimension drawing



connection diagram



typical sonic cone profile

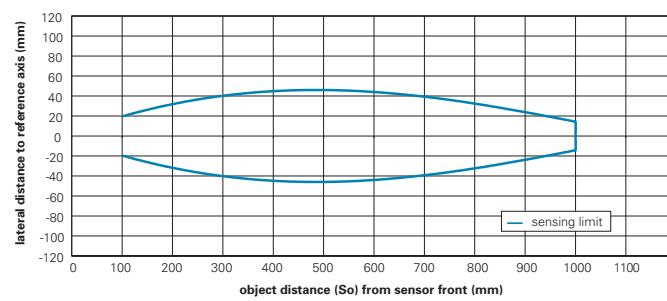

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10151658 Sensofix series 18

10164264 Sonic beam deflector series 18 rectangular

10163979 Converter 3-point (M12)

for details: see accessories section

order reference	output circuit
UNAR 18I6903/S14G	current output
UNAR 18U6903/S14G	voltage output



Sd = 1000 mm

- Teach-in or potentiometer
- 0 ... 10 V / 4 ... 20 mA
- signals of Teach-in version invertible



general data

scanning range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
sonic frequency	240 kHz
response time ton	< 80 ms
release time toff	< 80 ms
alignment aid	target indication flashing
temperature drift	< 2 % of distance to target So

potentiometer

light indicator	LED green
-----------------	-----------

Teach-in

scanning range close limit Sdc	100 ... 1000 mm
light indicator	yellow LED / red LED

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
------------------------------------	-------

current output

current consumption max. (no load)	55 mA
load resistance +Vs max.	< 1100 Ohm
load resistance +Vs min.	< 400 Ohm



mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	30 mm
height / length	70 mm

ambient conditions


operating temperature	-10 ... +60 °C
protection class	IP 67

dimension drawings




Teach-in = Teach-in or potentiometer

connection diagram



typical sonic cone profile

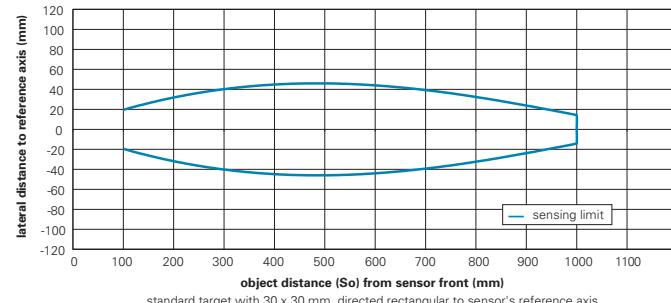

connectors and mating connectors

ESG 34SH0200 Connector M12, 3 pin, straight, 2 m

ESW 33SH0200 Connector M12, 3 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10163979 Converter 3-point (M12)

for details: see accessories section



Sd = 2500 mm

- Teach-in or potentiometer
- 0 ... 10 V / 4 ... 20 mA
- signals of Teach-in version invertible

general data

scanning range sd	400 ... 2500 mm
scanning range close limit Sdc	400 ... 2500 mm
scanning range far limit Sde	400 ... 2500 mm
repeat accuracy	< 1 mm
resolution	< 0,3 mm
adjustment	Teach-in
sonic frequency	120 kHz
response time ton	< 160 ms
release time toff	< 160 ms
alignment aid	target indication flashing
light indicator	yellow LED / red LED
temperature drift	< 2 % of distance to target So

electrical data

voltage supply range +Vs	15 ... 30 VDC
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

voltage output

current consumption max. (no load)	35 mA
output signal	0 ... 10 V / 10 ... 0 V

current output

current consumption max. (no load)	55 mA
output signal	4 ... 20 mA / 20 ... 4 mA
load resistance +Vs max.	< 1100 Ohm

load resistance +Vs min.	< 400 Ohm
--------------------------	-----------



mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	30 mm
height / length	95 mm



ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

order reference	output circuit	connection types
UNAM 50I6121	current output	cable, 2 m
UNAM 50I6121/S14	current output	connector M12
UNAM 50U6121	voltage output	cable, 2 m
UNAM 50U6121/S14	voltage output	connector M12

**dimension drawings**

Teach-in = Teach-in or potentiometer

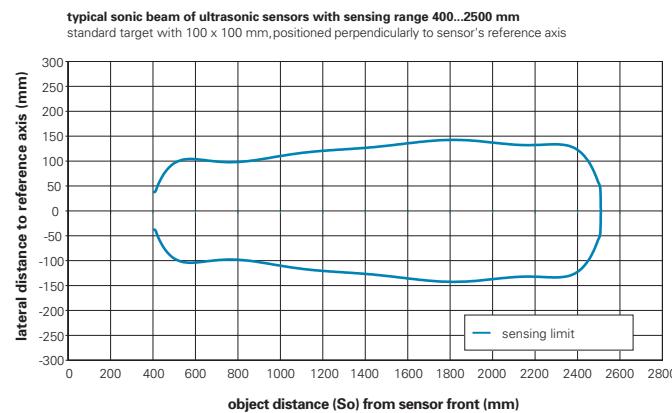connection diagram**typical sonic cone profile****connectors and mating connectors**

ESG 34SH0200 Connector M12, 3 pin, straight, 2 m

ESW 33SH0200 Connector M12, 3 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10163979 Converter 3-point (M12)

for details: see accessories section



Ultrasonic proximity sensors

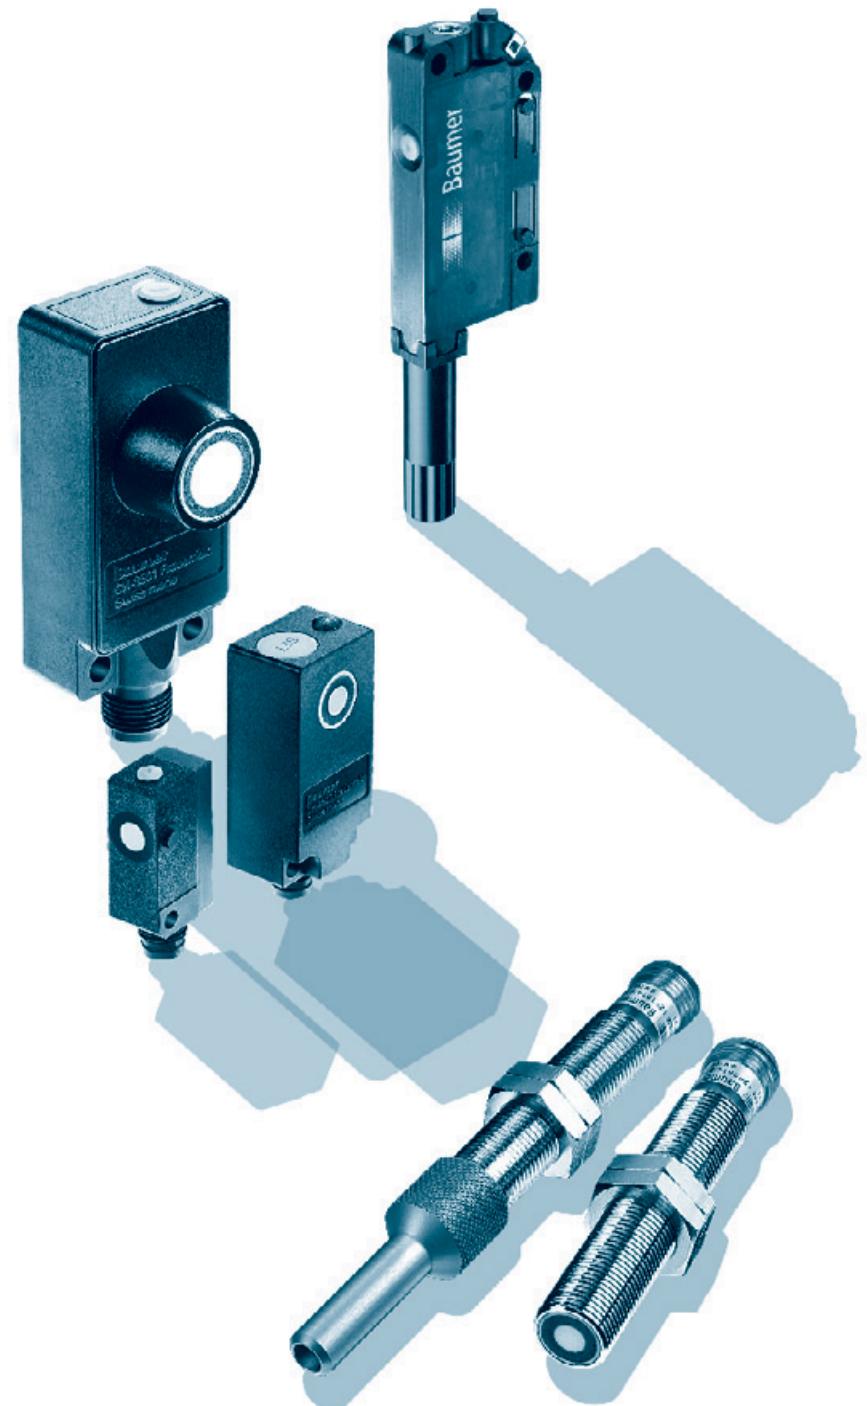

Ultrasonic proximity sensors


Introduction
Overview
Rectangular designs
Cylindrical designs

Page 54
Page 56
Page 58
Page 69



Design and operation

A special sonic transducer is used for the ultrasonic proximity sensors, which allows for alternate transmission and reception of sound waves. The transducer emits a number of sonic waves which are reflected by an object, back to the transducer. After emission of the sound waves, the ultrasonic sensor will switch to receive mode. The time elapsed between emitting and receiving is proportional to the distance of the object from the sensor.

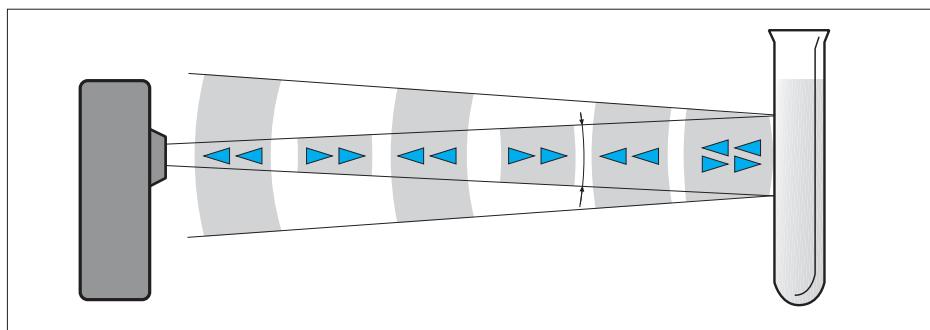

Digital output

Sensing is only possible within the detection area. The required sensing range can be adjusted with the sensor's potentiometer. If an object is detected within the set area, the output changes its state. The built-in LED indicates this change.

... with Teach-in

Teach-in procedures

All adjustments are carried out via the internal Teach-in button or the external Teach-in wire.

Adjustment switching point Sde

1. Adjustment mode:
Press the Teach-in button or connect the white Teach-in wire to +Vs for approx. 2 secs until the LED flashes green. Release the button or disconnect Teach-in wire.
2. LED flashes green. Place the target at the required scanning range and press the Teach-in button or connect the external white Teach-in wire shortly to +Vs.
3. Successful completion of Teach-in procedure is confirmed by LED being „on“ for approx. 2 secs.

Teach-in lock

The Teach-in function is locked five minutes after power up or five minutes after the end of the last Teach-in process.

Resetting to original factory settings

Holding the button down or connecting the white Teach-in wire to +Vs for > 6 secs, will automatically restore the original factory setting. Fast flashing of the LED indicates successful completion of the resetting.

Ultrasonic proximity sensors






rectangular designs

product family	UNCK 09	UNCK 09	UNDK 09	UNDK 09	UNDK 10	UNDK 20	UNDK 20
							
width / diameter	8,6 mm	8,6 mm	8,6 mm	8,6 mm	10,4 mm	20 mm	20 mm
scanning range sd	30 ... 200 mm	3 ... 150 mm	30 ... 200 mm	3 ... 150 mm	10 ... 200 mm	10 ... 200 mm	40 ... 400 mm
potentiometer							
Teach-in	■	■	■	■	■	■	■
repeat accuracy	< 0,5 mm	< 0,5 mm	< 0,5 mm				
operating temperature	0 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C			
housing material	PA 12	PA 12	PA 12	PA 12	plastic (ASA)	polyester	polyester
cable PUR 4 x 0,08, 2 m	■	■	■	■			
cable, 2 m					■		
flylead connector M8, L=200 mm	■	■	■	■	■		
connector M8					■	■	■
connector M12							
page	58	59	60	61	62	63	64

cylindrical designs

product family	UNAM 12	UNAM 18	UNAM 18				
							
special type	Highspeed		Highspeed				
width / diameter	12 mm	18 mm	18 mm				
scanning range sd	0 ... 40 mm	5 ... 70 mm	10 ... 70 mm	10 ... 200 mm	40 ... 400 mm	100 ... 700 mm	100 ... 1000 mm
potentiometer						■	
external Teach-in	■	■	■	■	■		
Teach-in							■
repeat accuracy	< 0,5 mm	< 0,5 mm	< 0,5 mm				
operating temperature	-10 ... +60 °C	0 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C
housing material	brass nickel plated	brass nickel plated	brass nickel plated				
cable, 2 m						■	
connector M12	■	■	■	■	■		■

UNDK 20	UNDK 30	UNDK 30	UNDK 30
			
20 mm	30 mm	30 mm	30 mm
100 ... 1000 mm	30 ... 250 mm	60 ... 400 mm	100 ... 1000 mm
■	■	■	
< 0,5 mm	< 0,5 mm	< 0,5 mm	< 0,5 mm
-10 ... +60 °C	-25 ... +60 °C	-25 ... +60 °C	-10 ... +60 °C
polyester	polyester / die-cast zinc	polyester / die-cast zinc	polyester / die-cast zinc
■	■	■	
■			
65	66	67	68

UNAR 18	UNAR 18	UNAM 30	UNAM 50
			
chemically resistant	chemically resistant		
18 mm	18 mm	30 mm	30 mm
60 ... 400 mm	100 ... 1000 mm	200 ... 1500 mm	350 ... 2500 mm
■	■		
■	■		
< 0,5 mm	< 0,5 mm	< 1 mm	< 1 mm
0 ... +60 °C	0 ... +60 °C	-25 ... +60 °C	-25 ... +60 °C
stainless steel 1.4435 (V4A)	stainless steel 1.4435 (V4A)	brass nickel plated	brass nickel plated
■	■	■	■
■	■	■	■
76	77	78	79



Sd = 200 mm



- short response time
- high resolution
- detects the smallest objects

general data

scanning range sd	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 7 ms
release time toff	< 7 ms
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	green LED / red LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	55 mm
depth	24,5 mm

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	


order reference

order reference	connection types
UNCK 09G8914	cable PUR 4 x 0,08, 2 m
UNCK 09G8914/KS35A	fylead connector M8, L=200 mm

dimension drawing

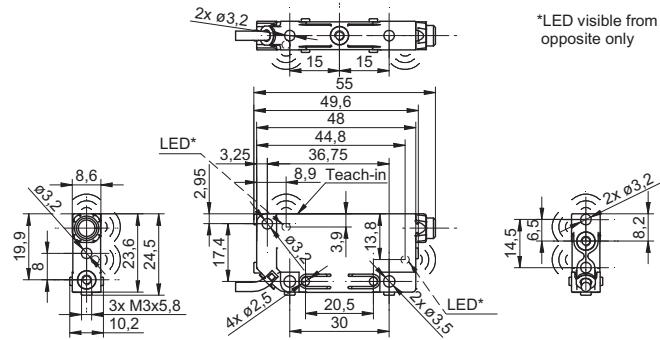


fylead connector version

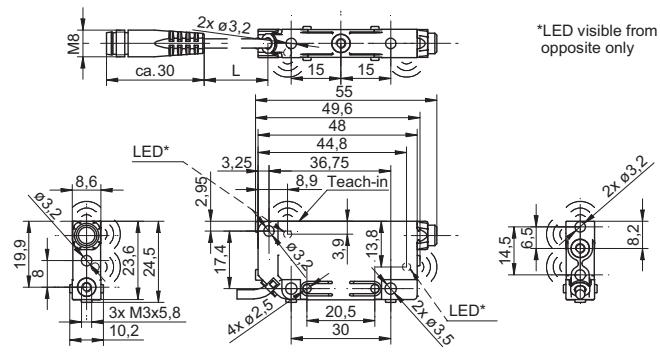


standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

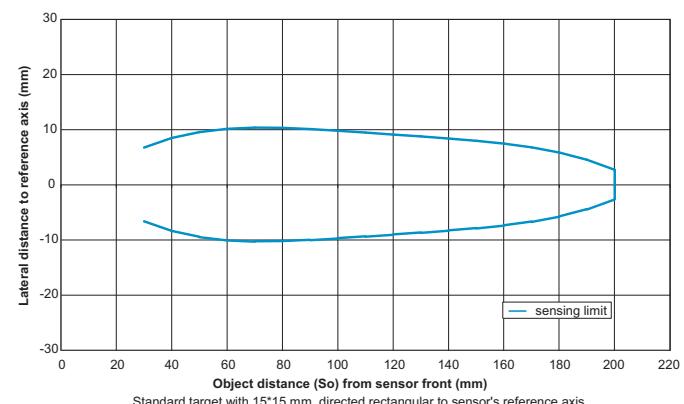



Sd = 150 mm

- measurement in very small containers
- stackability in a 9 mm pitch
- short response time



general data

scanning range sd	3 ... 150 mm
scanning range far limit Sde	3 ... 150 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 7 ms
release time toff	< 7 ms
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	green LED / red LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	82 mm
depth	24,5 mm

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	


order reference

order reference	connection types
UNCK 09G8914/D1	cable PUR 4 x 0,08, 2 m
UNCK 09G8914/KS35AD1	flylead connector M8, L=200 mm

dimension drawing

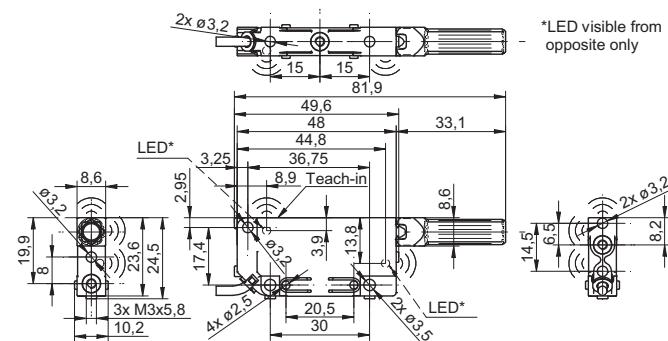


flylead connector version

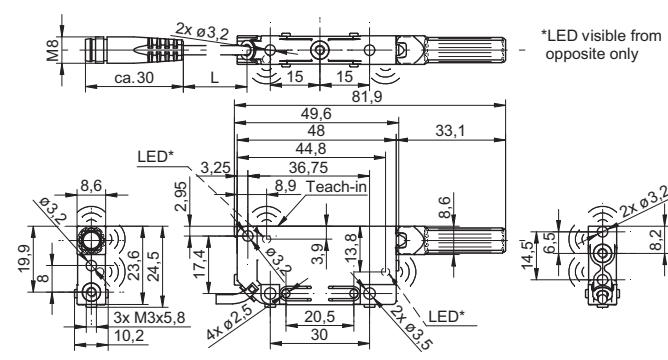


standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

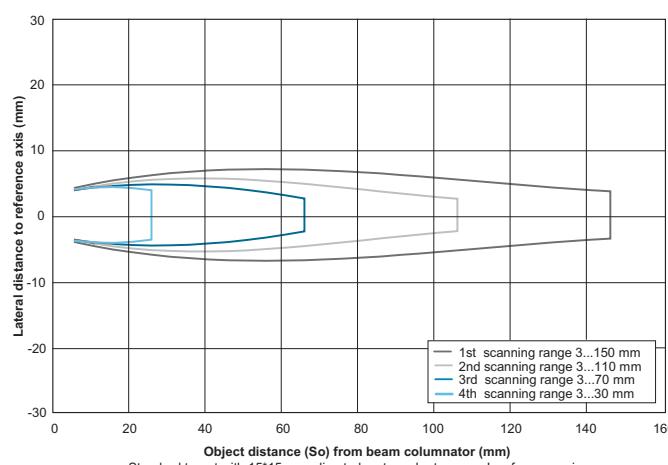



Sd = 200 mm



- short response time
- detects the smallest objects
- internal and external Teach-in

general data

scanning range sd	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 7 ms
release time toff	< 7 ms
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	green LED / red LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	48,8 mm
depth	30,5 mm

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	


order reference

order reference	connection types
UNDK 09G8914	cable PUR 4 x 0,08, 2 m
UNDK 09G8914/KS35A	fylead connector M8, L=200 mm

dimension drawing

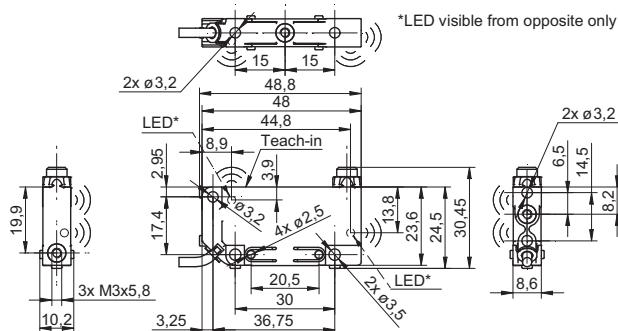


fylead connector version

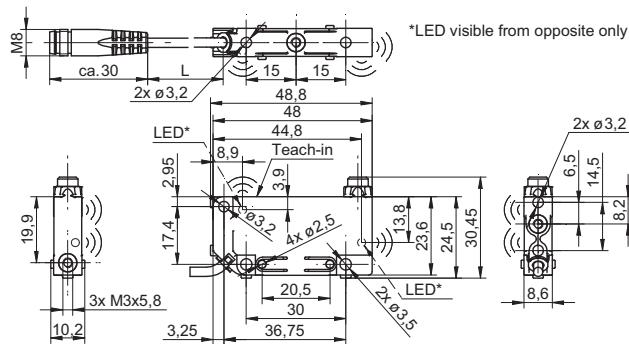


standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

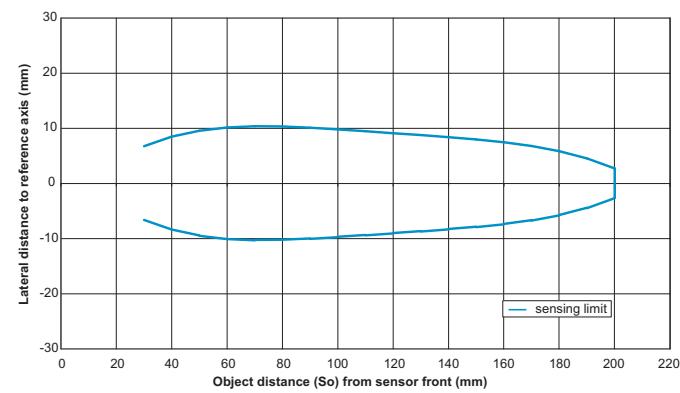



Sd = 150 mm

- measurement in very small containers
- stackability in a 9 mm pitch
- short response time



general data

scanning range sd	3 ... 150 mm
scanning range far limit Sde	3 ... 150 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 7 ms
release time toff	< 7 ms
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	green LED / red LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	48,8 mm
depth	57,7 mm

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	


order reference

order reference	connection types
UNDK 09G8914/D1	cable PUR 4 x 0,08, 2 m
UNDK 09G8914/KS35AD1	flylead connector M8, L=200 mm

dimension drawing

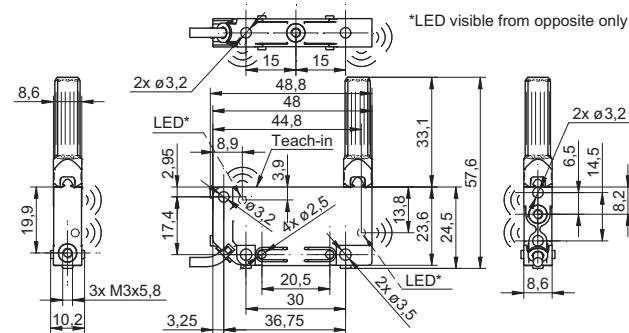


flylead connector version

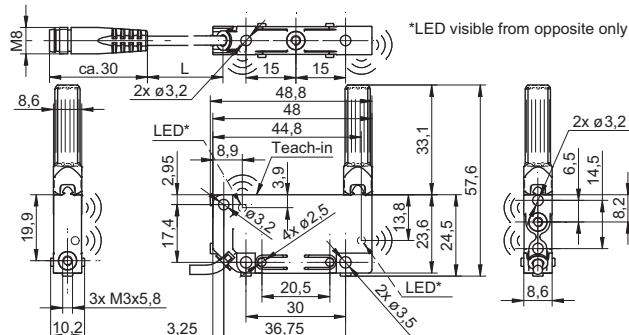


standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

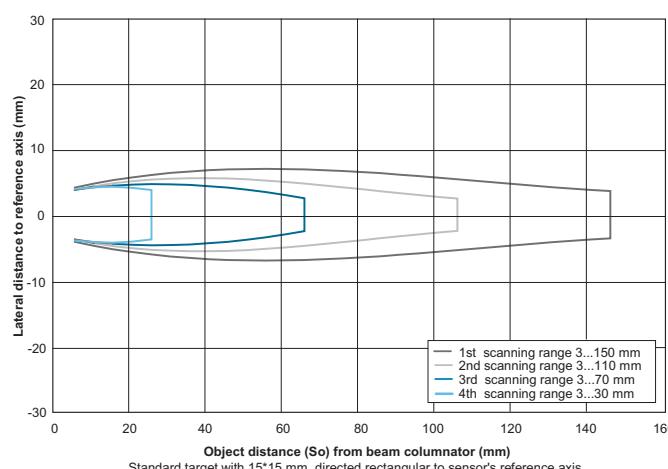



Sd = 200 mm



- compact housing
- very low mass (4 g)
- long sensing range / small blind range

general data

scanning range sd	10 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 15 ms
release time toff	< 15 ms
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	plastic (ASA)
width / diameter	10,4 mm
height / length	27 mm
depth	14 mm

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10150326	Sensofix series 10 / series 20
10133792	Mounting bracket series 10 L design
10114501	Mounting bracket series 10 (U design)
10162083	Mounting panel for sensors series 10
10118798	Mounting bracket series 10
10162376	Sonic beam deflector for ultrasonic sensors series 10

for details: see accessories section

order reference

UNDK 10N8914

output circuit

NPN make function (NO) / break function (NC)

connection types

cable, 2 m

UNDK 10N8914/KS35A

NPN make function (NO) / break function (NC)

fylead connector M8, L=200 mm

UNDK 10N8914/S35A

NPN make function (NO) / break function (NC)

connector M8

UNDK 10P8914

PNP make function (NO) / break function (NC)

cable, 2 m

UNDK 10P8914/KS35A

PNP make function (NO) / break function (NC)

fylead connector M8, L=200 mm

UNDK 10P8914/S35A

PNP make function (NO) / break function (NC)

connector M8



Sd = 200 mm

- internal and external Teach-in
- small sonic beam angle



general data

scanning range sd	10 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 10 ms
release time toff	< 10 ms
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors


ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10150326	Sensofix series 10 / series 20
10153290	Sonic beam deflector series 20
for details: see accessories section	


dimension drawing



connection diagrams

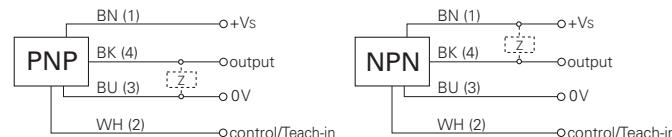

typical sonic cone profile

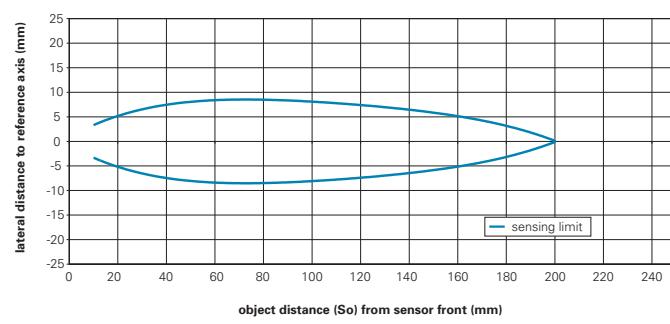

order reference

UNDK 20N6914/S35A	NPN make function (NO)
UNDK 20N7914/S35A	NPN break function (NC)
UNDK 20P6914/S35A	PNP make function (NO)
UNDK 20P7914/S35A	PNP break function (NC)



Sd = 400 mm

- internal and external Teach-in
- wide sonic beam angle



general data

scanning range sd	40 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 25 ms
release time toff	< 25 ms
alignment aid	target indication flashing
sonic frequency	290 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10150326	Sensofix series 10 / series 20
10153290	Sonic beam deflector series 20
for details: see accessories section	


order reference

	output circuit
UNDK 20N6912/S35A	NPN make function (NO)
UNDK 20N7912/S35A	NPN break function (NC)
UNDK 20P6912/S35A	PNP make function (NO)
UNDK 20P7912/S35A	PNP break function (NC)


dimension drawing



connection diagrams

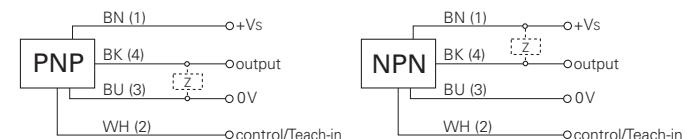

typical sonic cone profile

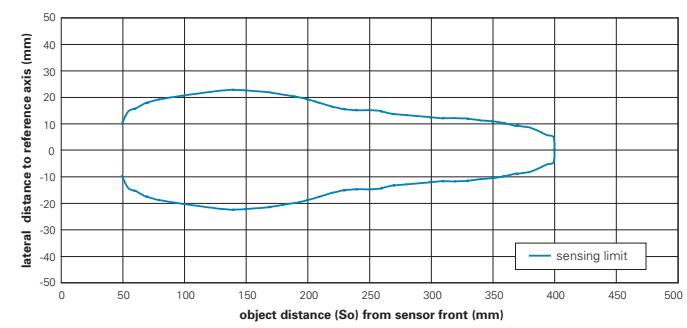



Sd = 1000 mm

- internal and external Teach-in
- long sensing range



general data

scanning range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 50 ms
release time toff	< 50 ms
alignment aid	target indication flashing
sonic frequency	240 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m


ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10150326	Sensofix series 10 / series 20
10153290	Sonic beam deflector series 20
for details: see accessories section	


dimension drawing



connection diagrams

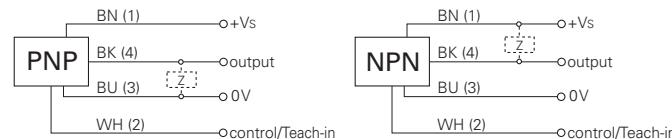

typical sonic cone profile

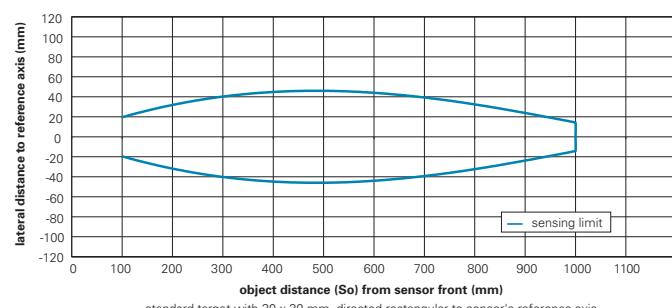

order reference

UNDK 20N6903/S35A	NPN make function (NO)
UNDK 20N7903/S35A	NPN break function (NC)
UNDK 20P6903/S35A	PNP make function (NO)
UNDK 20P7803/S35A	PNP break function (NC)



Sd = 250 mm

- potentiometer
- synchronization output
- small blind range



general data

scanning range sd	30 ... 250 mm
scanning range far limit Sde	30 ... 250 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
synchronization	yes
multiplex version	on request
temperature drift	< 0,18 % Sde/K
adjustment	potentiometer
response time ton (sync on)	< 10 ms
release time toff (sync on)	< 10 ms
alignment aid	target indication flashing
sonic frequency	300 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions

operating temperature	-25 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10152386 Sensofix series 30


for details: see accessories section

order reference	output circuit	connection types
UNDK 30N1713	NPN make function (NO)	cable, 2 m
UNDK 30N1713/S14	NPN make function (NO)	connector M12
UNDK 30N3713	NPN break function (NC)	cable, 2 m
UNDK 30N3713/S14	NPN break function (NC)	connector M12
UNDK 30P1713	PNP make function (NO)	cable, 2 m
UNDK 30P1713/S14	PNP make function (NO)	connector M12
UNDK 30P3713	PNP break function (NC)	cable, 2 m
UNDK 30P3713/S14	PNP break function (NC)	connector M12


dimension drawings

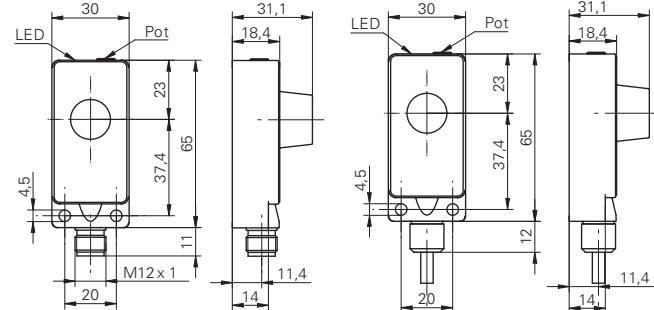

connection diagrams

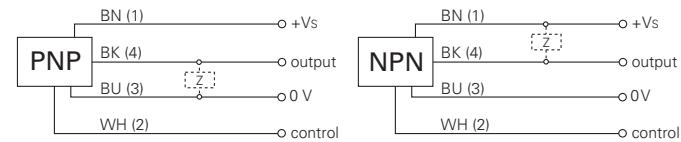

typical sonic cone profile

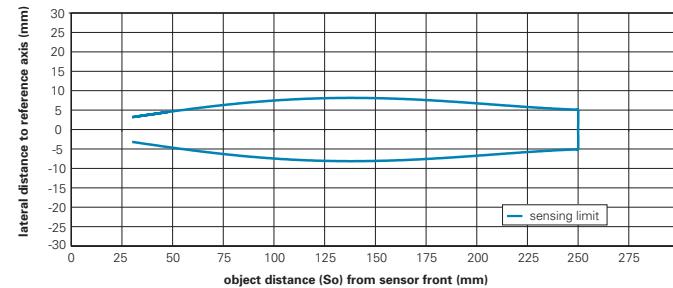

standard square target, size 15 x 15 mm, positioned perpendicularly to sensor's reference axis



Sd = 400 mm

- potentiometer
- synchronization output



general data

scanning range sd	60 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
synchronization	yes
multiplex version	on request
temperature drift	< 0,18 % Sde/K
adjustment	potentiometer
response time ton (sync on)	< 25 ms
release time toff (sync on)	< 25 ms
alignment aid	target indication flashing
sonic frequency	400 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions

operating temperature	-25 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

Accessories


10152386	Sensofix series 30
for details: see accessories section	

order reference	output circuit	connection types
UNDK 30N1712	NPN make function (NO)	cable, 2 m
UNDK 30N1712/S14	NPN make function (NO)	connector M12
UNDK 30N3712	NPN break function (NC)	cable, 2 m
UNDK 30N3712/S14	NPN break function (NC)	connector M12
UNDK 30P1712	PNP make function (NO)	cable, 2 m
UNDK 30P1712/S14	PNP make function (NO)	connector M12
UNDK 30P3712	PNP break function (NC)	cable, 2 m
UNDK 30P3712/S14	PNP break function (NC)	connector M12


dimension drawings

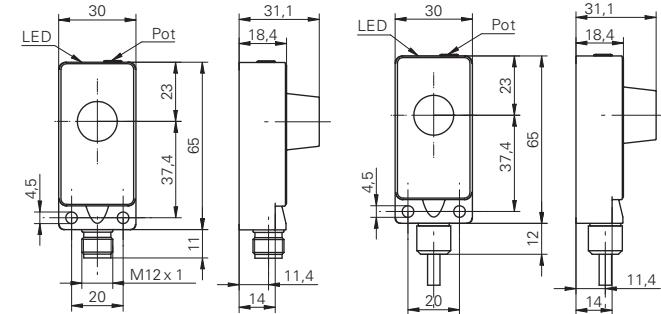

connection diagrams

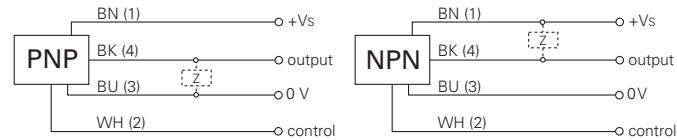

typical sonic cone profile

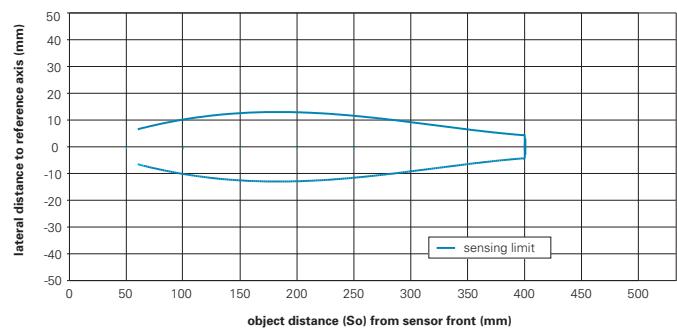



Sd = 1000 mm

- potentiometer
- synchronization output
- temperature compensation



general data

scanning range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
synchronization	yes
multiplex version	on request
temperature drift	< 0,1 % Sde/K
adjustment	potentiometer
response time ton (sync on)	< 50 ms
release time toff (sync on)	< 50 ms
alignment aid	target indication flashing
sonic frequency	240 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10152386 Sensofix series 30


for details: see accessories section

order reference	output circuit	connection types
UNDK 30N1703	NPN make function (NO)	cable, 2 m
UNDK 30N1703/S14	NPN make function (NO)	connector M12
UNDK 30N3703	NPN break function (NC)	cable, 2 m
UNDK 30N3703/S14	NPN break function (NC)	connector M12
UNDK 30P1703	PNP make function (NO)	cable, 2 m
UNDK 30P1703/S14	PNP make function (NO)	connector M12
UNDK 30P3703	PNP break function (NC)	cable, 2 m
UNDK 30P3703/S14	PNP break function (NC)	connector M12


dimension drawings

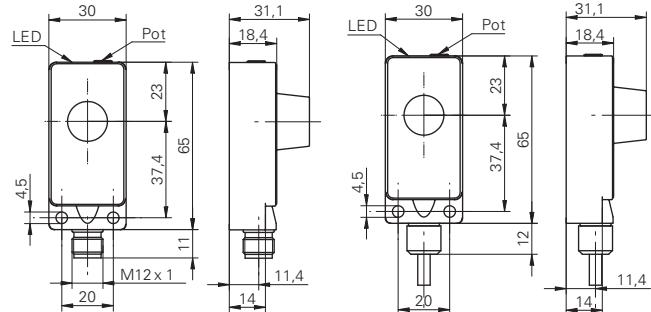

connection diagrams

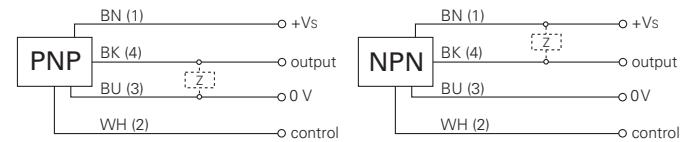

typical sonic cone profile

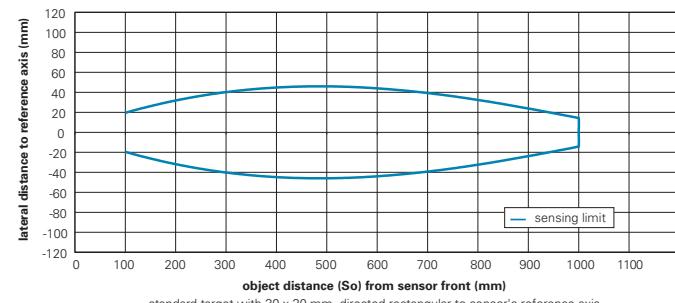

**Sd = 40 mm**

- high speed sensors
- with beam columnator for measurement in very small containers
- external Teach-in

**general data**

special type	Hghspeed
scanning range sd	0 ... 40 mm
scanning range far limit Sde	0 ... 40 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	external Teach-in
response time ton	< 1,3 ms
release time toff	< 1,3 ms
switching frequency	< 225 Hz
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	100 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors




ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10151720	Sensofix series 12 round
10141584	Teach-in Adapter M12

for details: see accessories section

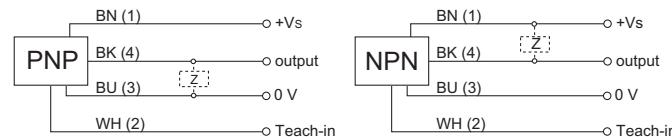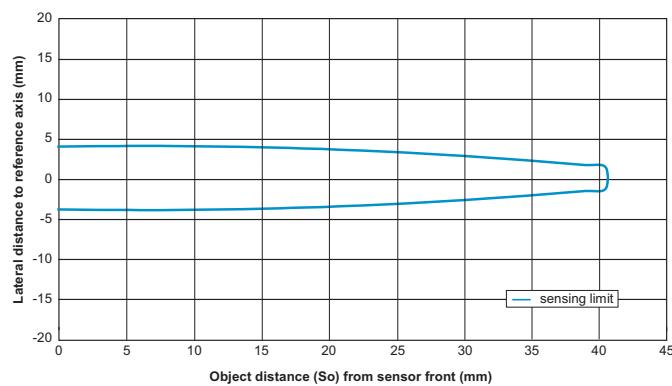dimension drawing**connection diagrams****typical sonic cone profile****order reference****UNAM 12N8910/S14OD****UNAM 12P8910/S14OD****output circuit**

NPN make function (NO) / break function (NC)

PNP make function (NO) / break function (NC)



Sd = 70 mm

- with beam columnator for measurement in very small containers
- external Teach-in
- short blind range

general data

scanning range sd	5 ... 70 mm
scanning range far limit Sde	5 ... 70 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	external Teach-in
response time ton	< 10 ms
release time toff	< 10 ms
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	100 mm
connection types	connector M12

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

Accessories


10151720	Sensofix series 12 round
10141584	Teach-in Adapter M12
for details: see accessories section	




dimension drawing



connection diagrams

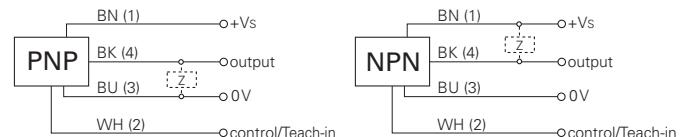

typical sonic cone profile

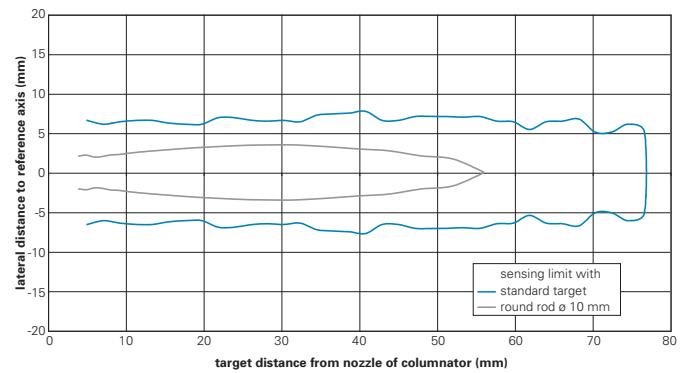

order reference

UNAM 12N1914/S14D	output circuit
UNAM 12P1914/S14D	NPN make function (NO)

UNAM 12P1914/S14D	PNP make function (NO)
-------------------	------------------------



Sd = 70 mm

- high speed sensors
- external Teach-in
- small sonic beam angle



general data

special type	Hghspeed
scanning range sd	10 ... 70 mm
scanning range far limit Sde	30 ... 70 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	external Teach-in
response time ton	< 1,3 ms
release time toff	< 1,3 ms
switching frequency	< 225 Hz
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	70 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

Accessories


10151720	Sensofix series 12 round
10141584	Teach-in Adapter M12

for details: see accessories section


dimension drawing



connection diagrams

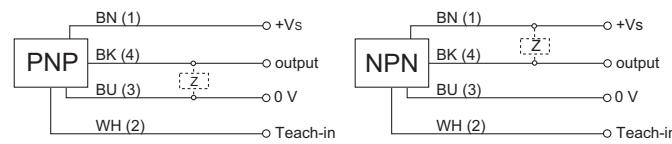

typical sonic cone profile

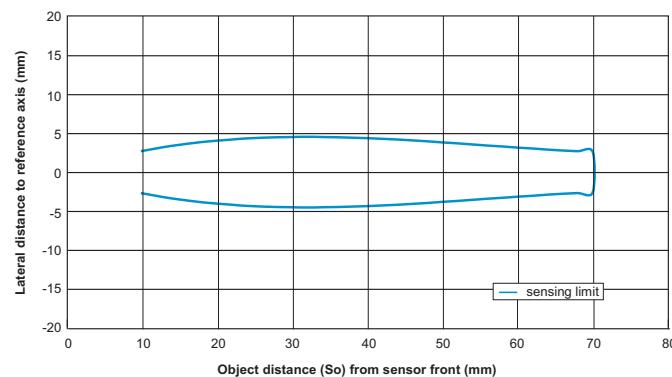

Standard target with 15*15 mm, directed rectangular to sensor's reference axis

order reference

UNAM 12N8910/S140

UNAM 12P8910/S140

output circuit

NPN make function (NO) / break function (NC)

PNP make function (NO) / break function (NC)



Sd = 200 mm

- external Teach-in
- Teach-in adapter
- small sonic beam angle



general data

scanning range sd	10 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	external Teach-in
response time ton	< 10 ms
release time toff	< 10 ms
alignment aid	target indication flashing
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	70 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10151720	Sensofix series 12 round
10141584	Teach-in Adapter M12
for details: see accessories section	

order reference	output circuit
UNAM 12N1914/S14	NPN make function (NO)
UNAM 12N3914/S14	NPN break function (NC)
UNAM 12P1914/S14	PNP make function (NO)
UNAM 12P3914/S14	PNP break function (NC)



Sd = 400 mm

- external Teach-in
- Teach-in adapter
- wide sonic beam angle



general data

scanning range sd	40 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	external Teach-in
response time ton	< 25 ms
release time toff	< 25 ms
alignment aid	target indication flashing
sonic frequency	290 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	70 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

Accessories


10151720	Sensofix series 12 round
10141584	Teach-in Adapter M12

for details: see accessories section


dimension drawing



connection diagrams

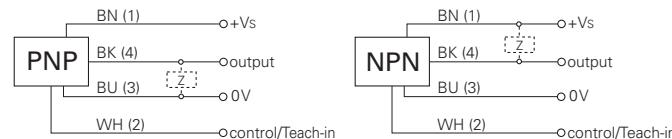

typical sonic cone profile

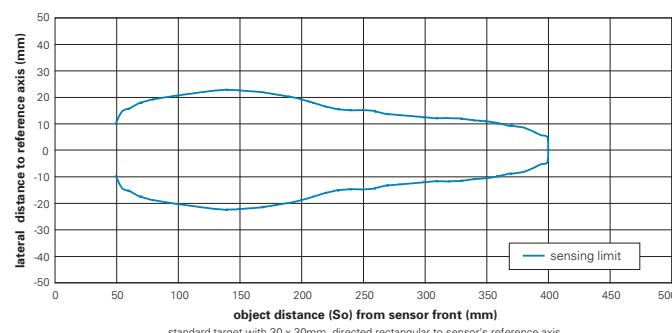

order reference	output circuit
UNAM 12N1912/S14	NPN make function (NO)
UNAM 12N3912/S14	NPN break function (NC)
UNAM 12P1912/S14	PNP make function (NO)
UNAM 12P3912/S14	PNP break function (NC)



Sd = 700 mm

- potentiometer
- synchronization output



general data

scanning range sd	100 ... 700 mm
scanning range far limit Sde	110 ... 700 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
synchronization	yes
temperature drift	< 0,18 % Sde/K
adjustment	potentiometer
response time ton (sync on)	< 50 ms
release time toff (sync on)	< 50 ms
alignment aid	target indication flashing
sonic frequency	240 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	30 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	18 mm
height / length	89 mm
connection types	cable, 2 m

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


Accessories

10151658	Sensofix series 18
10164264	Sonic beam deflector series 18 rectangular
for details: see accessories section	


order reference

order reference	output circuit
UNAM 18N1703	NPN make function (NO)
UNAM 18N3703	NPN break function (NC)
UNAM 18P1703	PNP make function (NO)
UNAM 18P3703	PNP break function (NC)


dimension drawing



connection diagrams

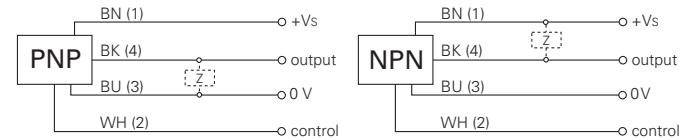

typical sonic cone profile

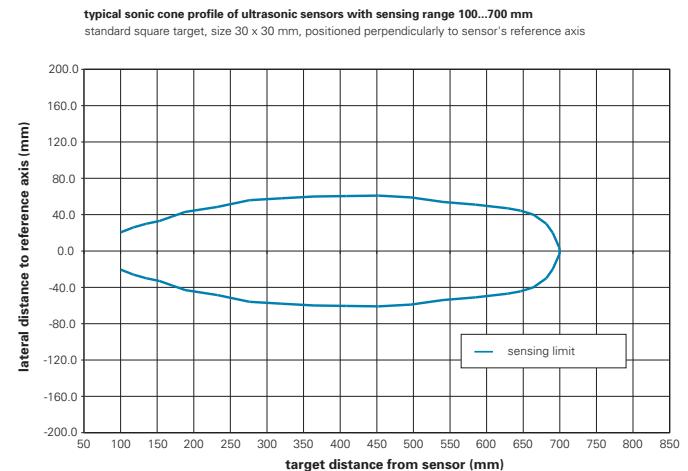



Sd = 1000 mm

- internal and external Teach-in



general data

scanning range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 50 ms
release time toff	< 50 ms
alignment aid	target indication flashing
sonic frequency	240 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	18 mm
height / length	90 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors


ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10151658	Sensofix series 18
10164264	Sonic beam deflector series 18 rectangular
for details: see accessories section	


dimension drawing



connection diagrams

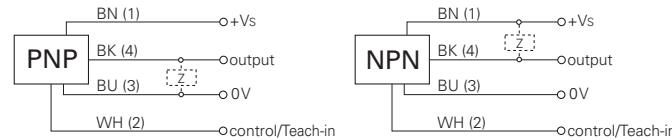

typical sonic cone profile

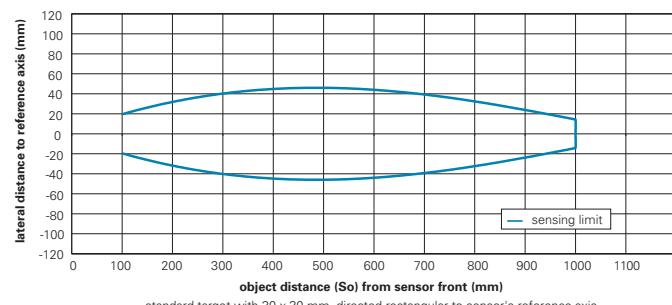

order reference	output circuit
UNAM 18N6903/S14	NPN make function (NO)
UNAM 18P6903/S14	PNP make function (NO)
UNAM 18P7903/S14	PNP break function (NC)



Sd = 400 mm

- internal and external Teach-in
- sensorfront chemically resistant
- stainless steel housing



general data

special type	chemically resistant
scanning range sd	60 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 25 ms
release time toff	< 25 ms
alignment aid	target indication flashing
sonic frequency	400 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	stainless steel 1.4435 (V4A)
coating active face	Parylene
material O-ring	FFKM
front of sensor durable against pressure	6 bar, 20'000 cycle
width / diameter	18 mm
height / length	91,5 mm
connection types	connector M12

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10151658	Sensofix series 18
10164264	Sonic beam deflector series 18 rectangular


for details: see accessories section

order reference	output circuit
UNAR 18N6912/S14G	NPN make function (NO)
UNAR 18N7912/S14G	NPN break function (NC)
UNAR 18P6912/S14G	PNP make function (NO)
UNAR 18P7912/S14G	PNP break function (NC)


dimension drawing



connection diagrams

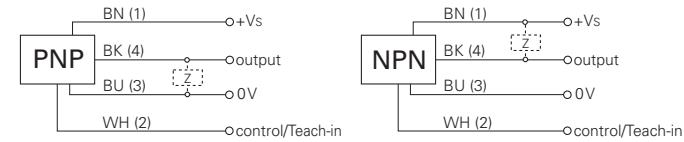

typical sonic cone profile

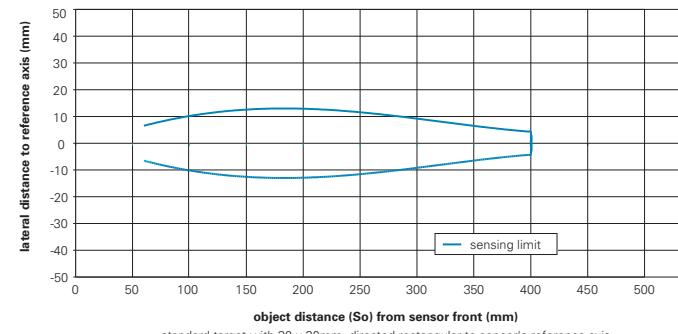



Sd = 1000 mm

- internal and external Teach-in
- sensorfront chemically resistant
- stainless steel housing



general data

special type	chemically resistant
scanning range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 0,18 % Sde/K
adjustment	Teach-in
response time ton	< 50 ms
release time toff	< 50 ms
alignment aid	target indication flashing
sonic frequency	240 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	stainless steel 1.4435 (V4A)
coating active face	Parylene
material O-ring	FFKM
front of sensor durable against pressure	6 bar, 20'000 cycle
width / diameter	18 mm
height / length	91,5 mm
connection types	connector M12

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10151658	Sensofix series 18
10164264	Sonic beam deflector series 18 rectangular


for details: see accessories section

order reference	output circuit
UNAR 18N6903/S14G	NPN make function (NO)
UNAR 18N7903/S14G	NPN break function (NC)
UNAR 18P6903/S14G	PNP make function (NO)
UNAR 18P7903/S14G	PNP break function (NC)


dimension drawing



connection diagrams

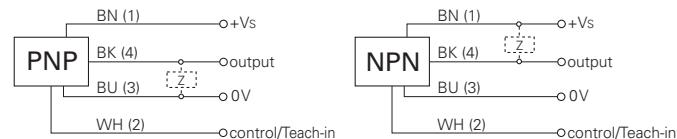

typical sonic cone profile

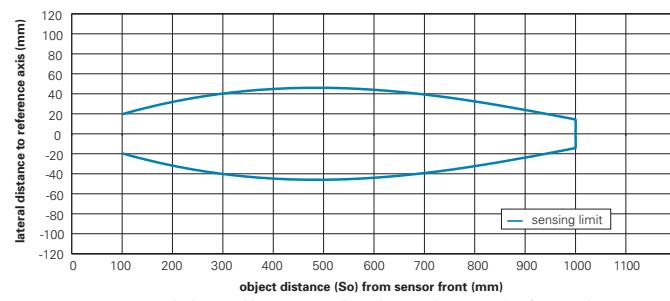

**Sd = 1500 mm**

- potentiometer
- increased sensing range

**general data**

scanning range sd	200 ... 1500 mm
scanning range far limit Sde	200 ... 1500 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 1 mm
temperature drift	< 0,18 % Sde/K
adjustment	potentiometer
response time ton	< 100 ms
release time toff	< 100 ms
alignment aid	target indication flashing
sonic frequency	200 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	30 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	30 mm
height / length	70 mm



ambient conditions

operating temperature	-25 ... +60 °C
protection class	IP 67


connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	

order reference	output circuit	connection types
UNAM 30N1104	NPN make function (NO)	cable, 2 m
UNAM 30N1104/S14	NPN make function (NO)	connector M12
UNAM 30N3104	NPN break function (NC)	cable, 2 m
UNAM 30N3104/S14	NPN break function (NC)	connector M12
UNAM 30P1104	PNP make function (NO)	cable, 2 m
UNAM 30P1104/S14	PNP make function (NO)	connector M12
UNAM 30P3104	PNP break function (NC)	cable, 2 m
UNAM 30P3104/S14	PNP break function (NC)	connector M12

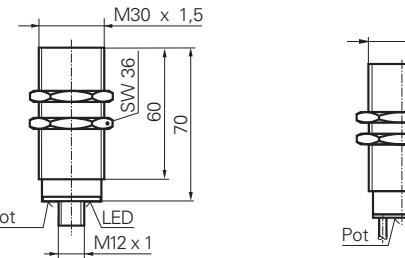dimension drawings**connection diagrams****typical sonic cone profile**

typical sonic beam of ultrasonic sensors with sensing range 200...1500 mm
standard target 100 x 100 mm, positioned perpendicularly to sensor's reference axis

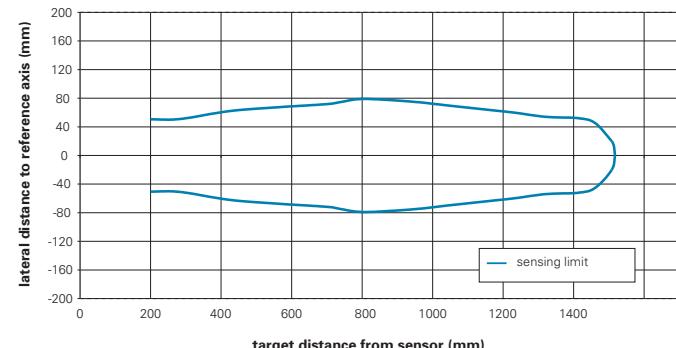

Sd = 2500 mm

- potentiometer
- synchronization output
- long sensing range

general data

scanning range sd	350 ... 2500 mm
scanning range far limit Sde	350 ... 2500 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 1 mm
synchronization	yes
temperature drift	< 0,18 % Sde/K
adjustment	potentiometer
response time ton	< 160 ms
release time toff	< 160 ms
alignment aid	target indication flashing
sonic frequency	120 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data






type	cylindrical threaded
housing material	brass nickel plated
width / diameter	30 mm
height / length	95 mm

ambient conditions

operating temperature	-25 ... +60 °C
protection class	IP 67

connectors and mating connectors


ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	

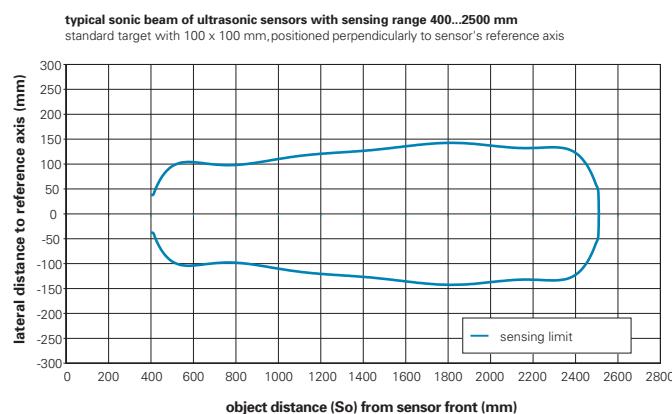**dimension drawings****connection diagrams****typical sonic cone profile**

order reference	output circuit	connection types
UNAM 50N1721	NPN make function (NO)	cable, 2 m
UNAM 50N1721/S14	NPN make function (NO)	connector M12
UNAM 50N3721	NPN break function (NC)	cable, 2 m
UNAM 50N3721/S14	NPN break function (NC)	connector M12
UNAM 50P1721	PNP make function (NO)	cable, 2 m
UNAM 50P1721/S14	PNP make function (NO)	connector M12
UNAM 50P3721	PNP break function (NC)	cable, 2 m
UNAM 50P3721/S14	PNP break function (NC)	connector M12



Ultrasonic 2 point proximity switches

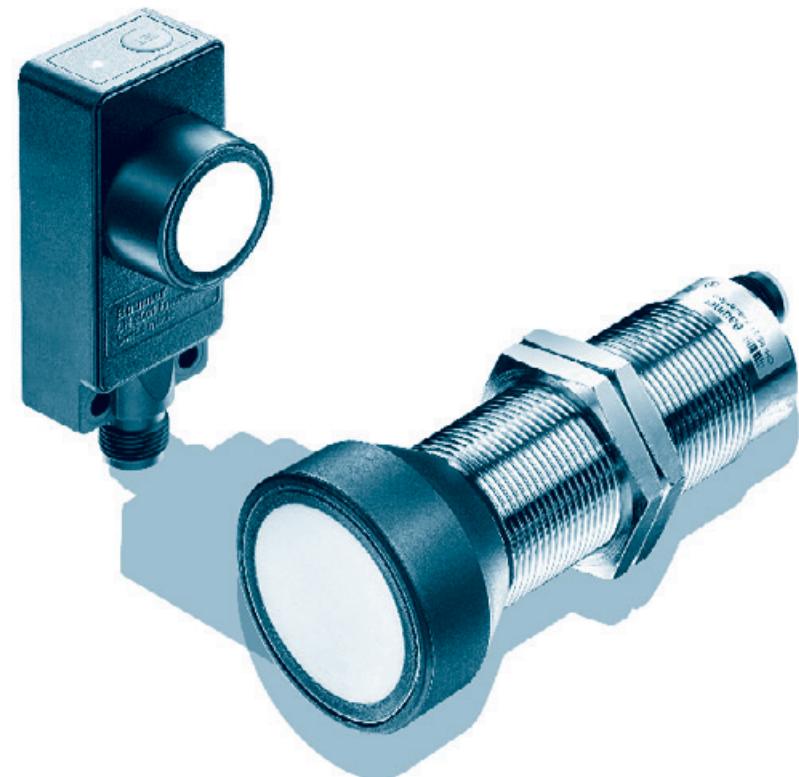

Ultrasonic 2 point proximity switches

Introduction	Page 82
Overview	Page 83
Rectangular designs	Page 84
Cylindrical designs	Page 88

Ultrasonic 2 point proximity switches



The button that thinks



Ultrasonic sensors with the "Teach-in" function are similar to the standard range of products but have the added versatility of a simple touch key set up. The switching points (Sde 1 and Sde 2) may be easily programmed within the sensing range by means of the built-in Teach-in button.

Simple operation

Adjustment switching point Sde 1

1. Adjustment mode:
Press the Teach-in button for approximately 2 secs until the LED flashes green. Release button.
2. LED flashes green. Place the target at the required scanning range and press the Teach-in button.
3. Successful completion of Teach-in procedure is confirmed by LED „on“ for approximately 2 secs.


Adjustment switching point Sde 2

1. Adjustment mode:
Press the Teach-in button for approximately 4 secs until the LED flashes yellow. Release button.
2. LED flashes yellow. Place the target at the required scanning range and press the Teach-in button.
3. Successful completion of Teach-in procedure is confirmed by LED „on“ for approximately 2 secs.

Resetting to original factory settings

Holding the button down for > 6 secs, will automatically restore the original factory setting. Fast flashing of the green/yellow LED indicates successful completion of the resetting.

Functional diagram

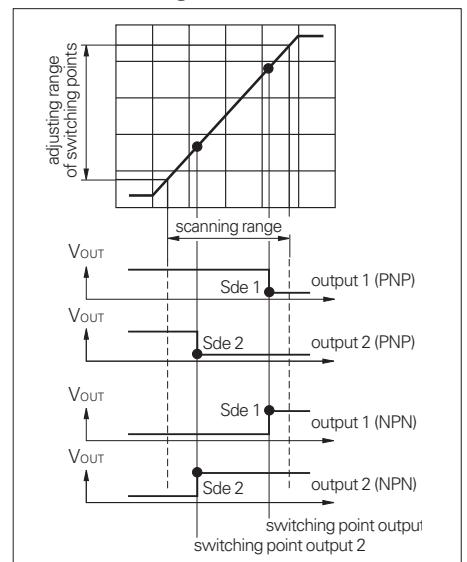

Options

- Remote Teach-in input
- Synchronization- / Multiplex output

Advantages

- Set up configuration is saved on an internal EEPROM ensuring long term stability.
- Simple one button set up, no tools required.
- Teach-in lock: the Teach-in function is locked five minutes after power up or five minutes after the end of the last Teach-in process.



rectangular designs

product family	UZDK 30	UZDK 30	UZDK 30	UZDK 30
				
width / diameter	30 mm	30 mm	30 mm	30 mm
scanning range sd	30 ... 250 mm	60 ... 400 mm	100 ... 1000 mm	200 ... 2000 mm
Teach-in	■	■	■	■
repeat accuracy	< 0,5 mm	< 0,5 mm	< 0,5 mm	< 1 mm
operating temperature	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C
housing material	polyester / die-cast zinc	polyester / die-cast zinc	polyester / die-cast zinc	polyester / die-cast zinc
cable, 2 m	■		■	■
connector M12	■	■	■	■
protection class	IP 67	IP 67	IP 67	IP 67
page	84	85	86	87

cylindrical designs

product family	UZAM 30	UZAM 50
		
width / diameter	30 mm	30 mm
scanning range sd	100 ... 1000 mm	350 ... 2500 mm
Teach-in	■	■
repeat accuracy	< 0,5 mm	< 1 mm
operating temperature	-10 ... +60 °C	-10 ... +60 °C
housing material	brass nickel plated	brass nickel plated
cable, 2 m	■	■
connector M12	■	■
protection class	IP 67	IP 67
page	88	89



Sd = 250 mm

- Teach-in
- small blind range
- two separate outputs



general data

special type	2 point proximity switch
scanning range sd	30 ... 250 mm
scanning range far limit Sde	30 ... 250 mm
hysteresis typ.	5 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 2 % Sde
adjustment	Teach-in
response time ton	< 20 ms
release time toff	< 20 ms
alignment aid	target indication flashing
sonic frequency	300 kHz
output indicator	green / yellow LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	40 mA
output circuit	PNP make function (NO)
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

Accessories


10152386	Sensofix series 30
for details: see accessories section	

order reference	connection types
UZDK 30P6113	cable, 2 m
UZDK 30P6113/S14	connector M12


dimension drawings

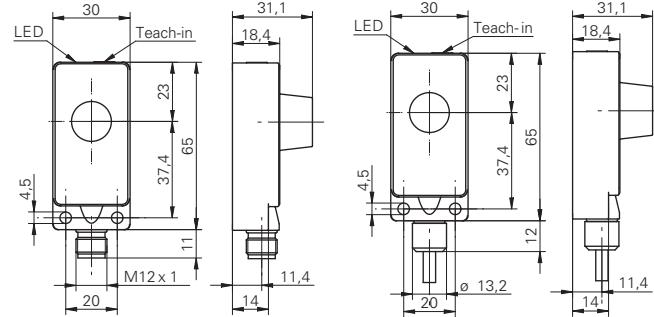

connection diagram



typical sonic cone profile

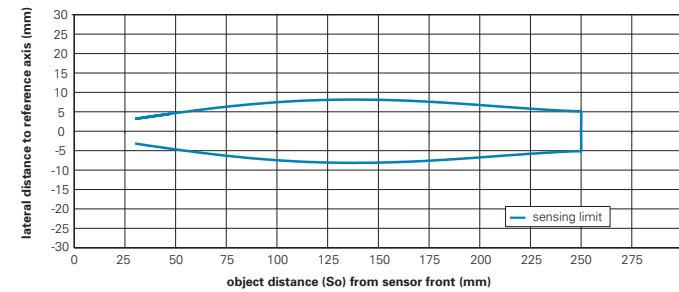



Sd = 400 mm

- Teach-in
- two separate outputs



general data

special type	2 point proximity switch
scanning range sd	60 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 2 % Sde
adjustment	Teach-in
response time ton	< 30 ms
release time toff	< 30 ms
alignment aid	target indication flashing
sonic frequency	400 kHz
output indicator	green / yellow LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	40 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67


connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	

Accessories

10152386	Sensofix series 30
for details: see accessories section	


dimension drawing



connection diagrams



typical sonic cone profile

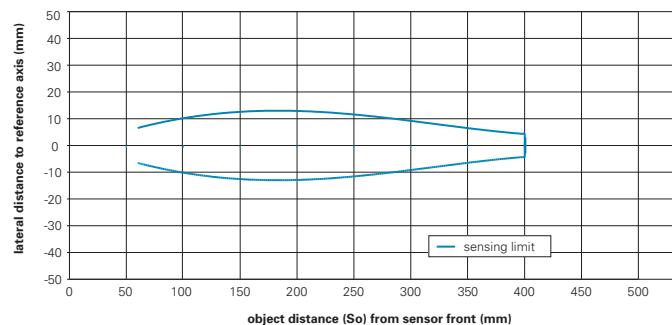

order reference	output circuit
UZDK 30N6112/S14	NPN make function (NO)
UZDK 30P6112/S14	PNP make function (NO)



Sd = 1000 mm

- Teach-in
- two separate outputs



general data

special type	2 point proximity switch
scanning range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 2 % Sde
adjustment	Teach-in
response time ton	< 40 ms
release time toff	< 40 ms
alignment aid	target indication flashing
sonic frequency	240 kHz
output indicator	green / yellow LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	40 mA
output circuit	PNP make function (NO)
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

Accessories


10152386	Sensofix series 30
for details: see accessories section	

order reference	connection types
UZDK 30P6103	cable, 2 m
UZDK 30P6103/S14	connector M12


dimension drawings

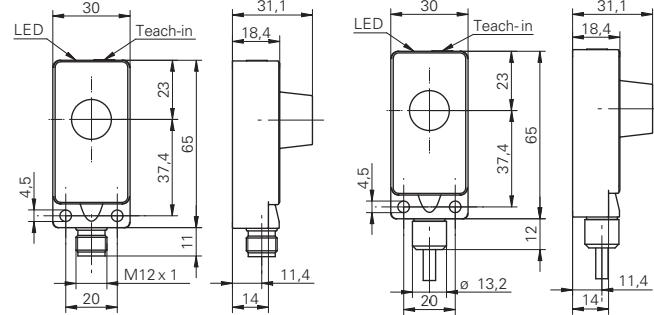

connection diagram



typical sonic cone profile

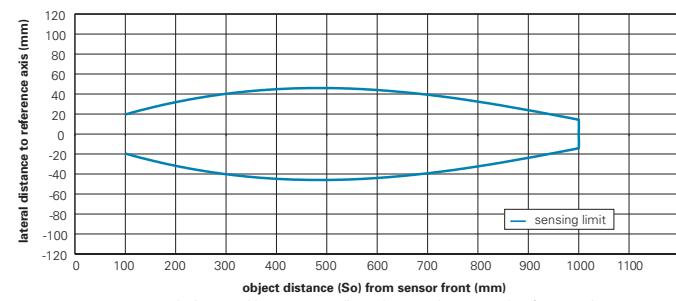



Sd = 2000 mm

- Teach-in
- two separate outputs



general data

special type	2 point proximity switch
scanning range sd	200 ... 2000 mm
scanning range far limit Sde	200 ... 2000 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 1 mm
temperature drift	< 2 % Sde
adjustment	Teach-in
response time ton	< 80 ms
release time toff	< 80 ms
alignment aid	target indication flashing
sonic frequency	200 kHz
output indicator	green / yellow LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	40 mA
output circuit	PNP make function (NO)
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors


ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10152386	Sensofix series 30
for details: see accessories section	


dimension drawings

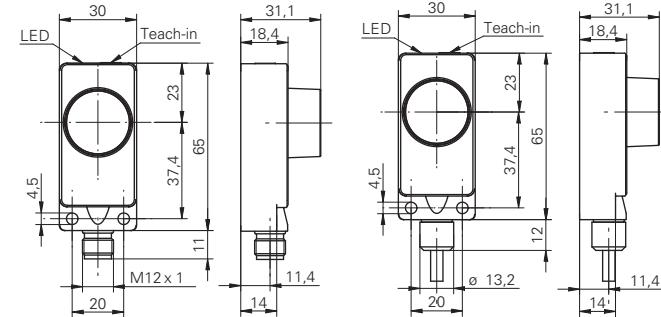

connection diagram



typical sonic cone profile

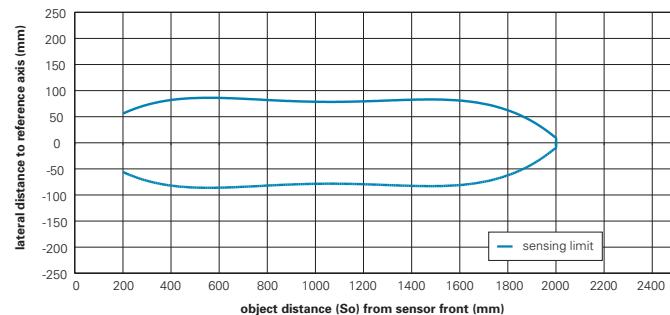

standard target with 100 x 100 mm, positioned perpendicularly to sensor's reference axis

order reference	connection types
UZDK 30P6104	cable, 2 m
UZDK 30P6104/S14	connector M12



Sd = 1000 mm

- Teach-in
- two separate outputs
- Multiplex-Function



general data

special type	2 point proximity switch
scanning range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 0,5 mm
temperature drift	< 2 % Sde
adjustment	Teach-in
response time ton	< 40 ms
release time toff	< 40 ms
alignment aid	target indication flashing
sonic frequency	240 kHz
output indicator	green / yellow LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	30 mm
height / length	70 mm



ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m
ESG 34CH0200	Connector M12, 5 pin, straight, 2 m
ESW 33CH0200	Connector M12, 5 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	

dimension drawings




connection diagrams



connection diagram multiplex version



typical sonic cone profile

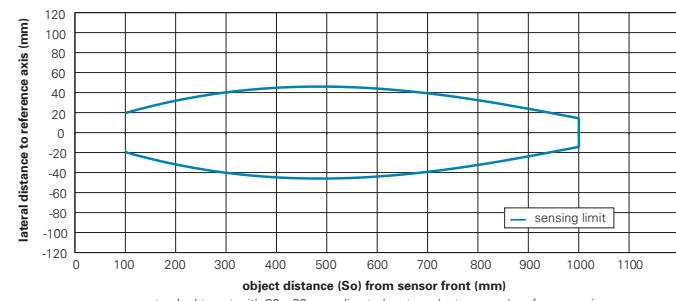

order reference

order reference	version	output circuit	connection types
UZAM 30N6103/S14	standard	NPN make function (NO)	connector M12
UZAM 30P6103	standard	PNP make function (NO)	cable, 2 m
UZAM 30P6103/S14	standard	PNP make function (NO)	connector M12
UZAM 30P6803/S14C	multiplex version	PNP make function (NO)	connector M12



Sd = 2500 mm

- Teach-in
- two separate outputs
- long sensing range

general data

special type	2 point proximity switch
scanning range sd	350 ... 2500 mm
scanning range far limit Sde	350 ... 2500 mm
hysteresis typ.	4 % Sde
repeat accuracy	< 1 mm
temperature drift	< 2 % Sde
adjustment	Teach-in
response time ton	< 160 ms
release time toff	< 160 ms
alignment aid	target indication flashing
sonic frequency	120 kHz
output indicator	green / yellow LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	40 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	30 mm
height / length	95 mm

ambient conditions



operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors



ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	




dimension drawings



connection diagrams




typical sonic cone profile

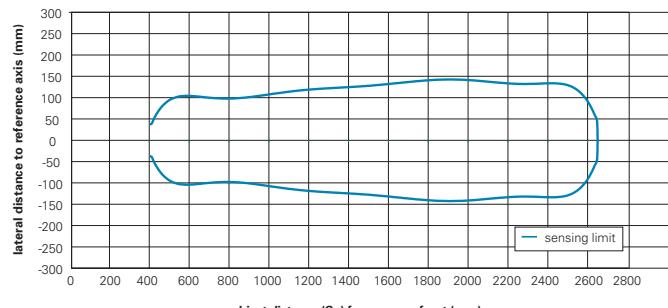

order reference	output circuit	connection types
UZAM 50N6121	NPN make function (NO)	cable, 2 m
UZAM 50N6121/S14	NPN make function (NO)	connector M12
UZAM 50P6121	PNP make function (NO)	cable, 2 m
UZAM 50P6121/S14	PNP make function (NO)	connector M12



Ultrasonic retro-reflective sensors

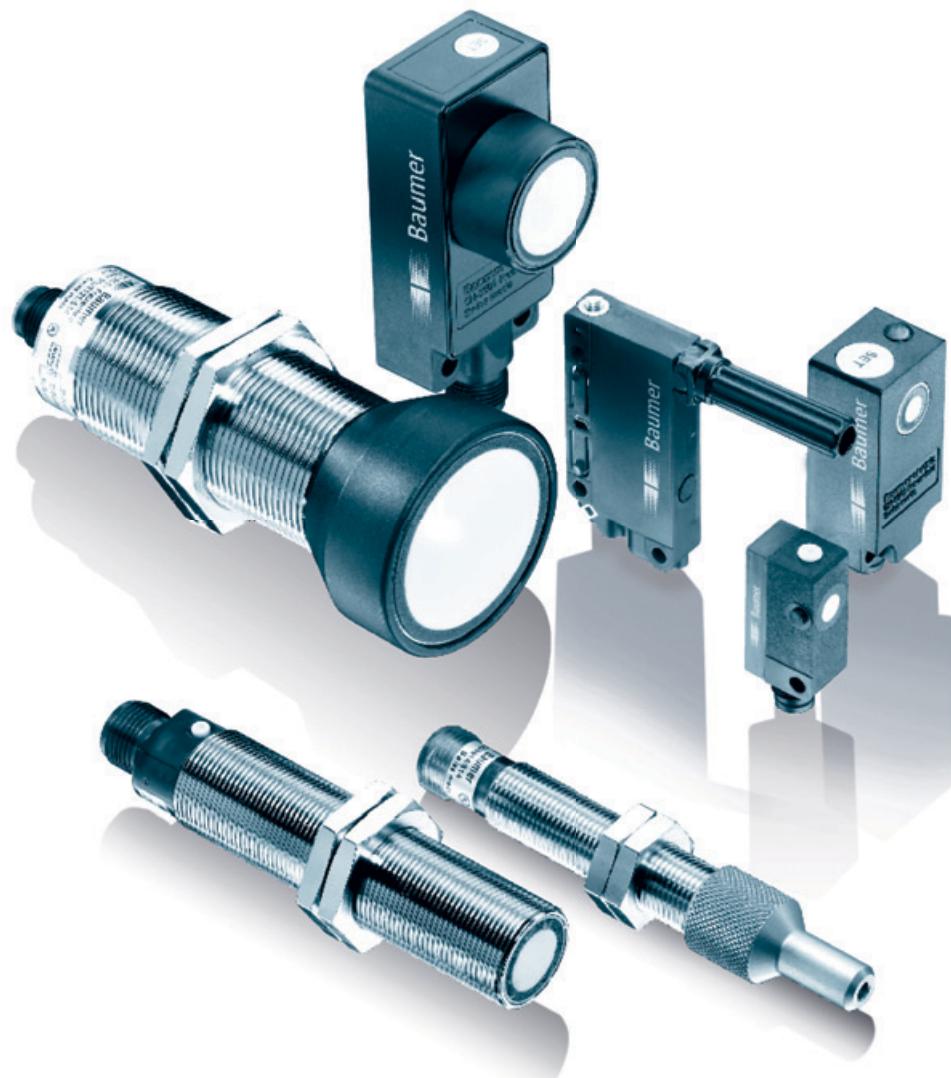

Ultrasonic retro-reflective sensors

Introduction
Overview
Rectangular designs
Cylindrical designs


Page 92
Page 94
Page 96
Page 104



Description

The retro-reflective ultrasonic sensor is similar in operation to the ultrasonic proximity sensor. The distance from the sensor to the reflector or to an object within the sensing distance is determined by measuring the propagation time. Any sound reflecting, stationary object can be used as a reflector. The sensing distance S_d (distance sensor-reflector) can be adjusted to the set up conditions with the sensor's potentiometer.

As long as the measured propagation time of the ultrasonic signal corresponds to the distance from the sensor to the reflector, the device is in the non-active state. When an object comes within the sensing distance, the propagation time changes and the sensor changes to the active state. This also allows detection of sound absorbent and sound deflecting objects.

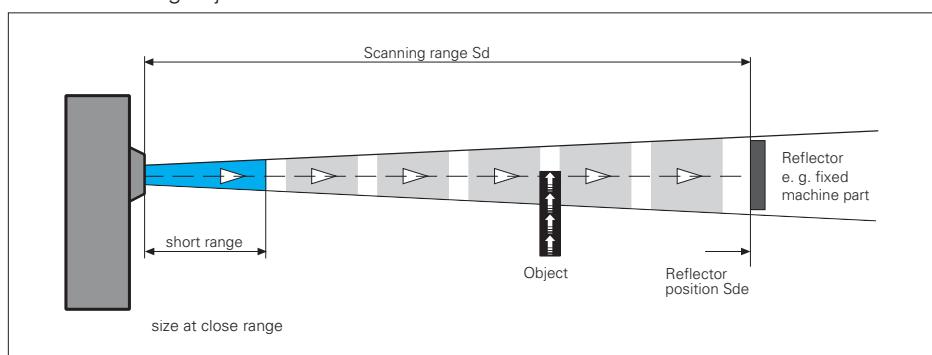

Setting Sde reflector distance


The sensor's potentiometer allows the user to adjust the set up conditions for a specific reflector position (S_{de}). The output LED is also an adjustment aid as follows:

1. Reflector in operating range

If the setting of S_{de} deviates from the actual reflector position by less than $\pm 2,5\%$, the reflector is in the operating range. The LED lights steadily, the output is inactive.

2. Reflector in the boundary range

Up to a deviation of $\pm 5\%$ the output remains inactive but the LED flashes. This indicates that the setting of S_{de} is not optimal and needs to be corrected.

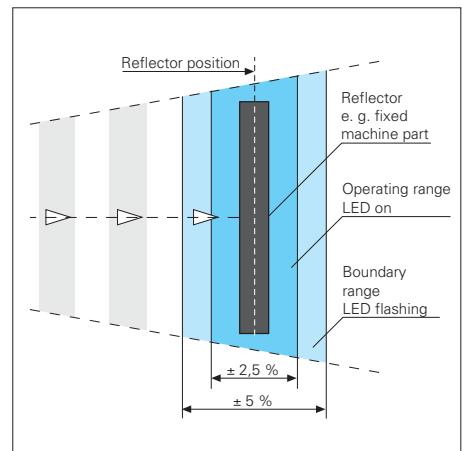

Retro-reflective sensor with Teach-in

All adjustments are made using the single built-in Teach-in button.

Teach-in of reflector's position

To enter the adjustment mode, push the Teach-in button for more than two seconds. You will know you have pushed it long enough by the indicating LED flashing green. When the button is released, the LED continues to flash. Any subsequent push of the button will teach the position of the reflector.

Resetting to original factory settings

Connecting the white Teach-in wire to $+Vs$ for > 6 sec, will automatically restore the original factory settings. Fast flashing of the LED indicates successful completion of the resetting.




Object detection

Standard object/reflector

The standard target is defined as a square, level object with an edge length of 30 mm ($Sde > 1000$ mm: 100 mm edge length, $Sde \geq 2500$ mm: 300 mm edge length) which is perpendicular to the sensor reference axis. The reflector must be made of a material with good sound reflection properties and be at least the same size as the target.


Object at close range

For reliable detection, the sound cone must be covered completely so that no echo is returned from the reflector. The object diameter necessary for this is at least 30 mm in URDK 30 and at least 100 mm in URAM 50.

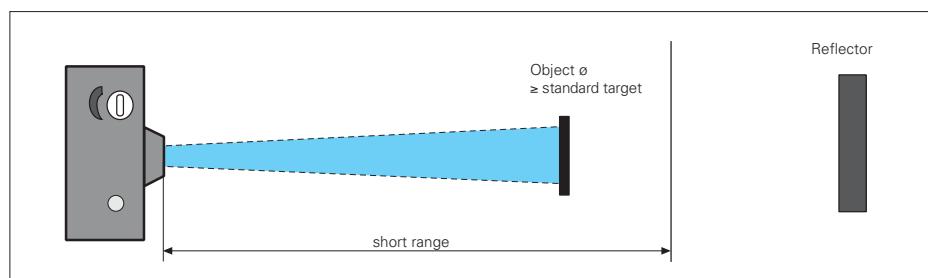


Object in the rest of the operating range

To ensure reliable object detection, the reflected signal must be strong enough. The strength of the reflected signal is dependent on the size of the object. For a standard object, or larger, the full sensing distance Sd is available.

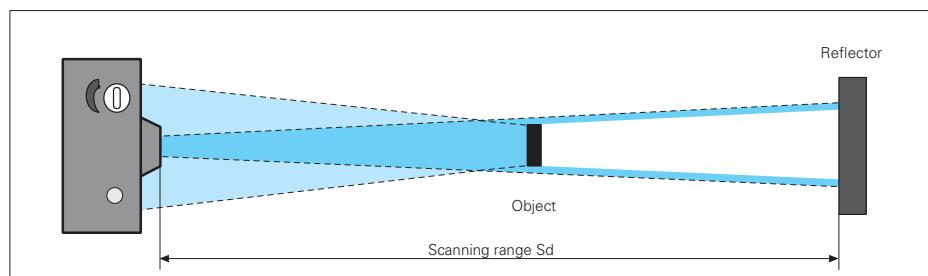

Advantages

- Easy detection even for 100 % sound absorbent materials
- Reliable detection of sound deflecting objects
- No blind region in front of the sensor for objects \geq standard object

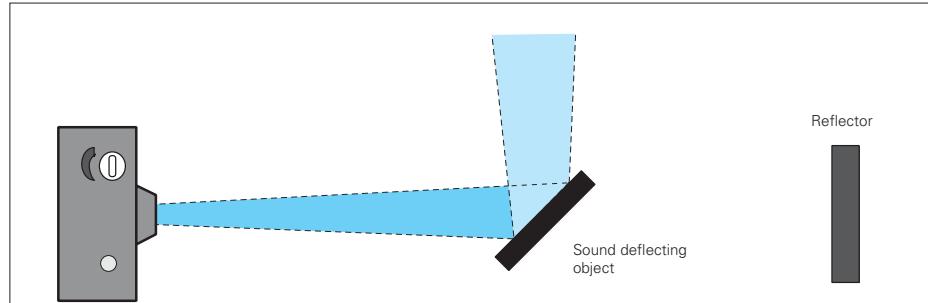



rectangular designs

product family	URCK 09	URDK 09	URDK 10	URDK 20	URDK 20	URDK 20	URDK 30
width / diameter	8,6 mm	8,6 mm	10,4 mm	20 mm	20 mm	20 mm	30 mm
scanning range sd	0 ... 200 mm	0 ... 200 mm	0 ... 200 mm	0 ... 200 mm	0 ... 400 mm	0 ... 1000 mm	0 ... 1000 mm
potentiometer							■
Teach-in	■	■	■	■	■	■	
repeat accuracy	< 1,5 mm	< 1,5 mm	< 1,5 mm	< 1,5 mm	< 1,5 mm	< 1,5 mm	< 3 mm
operating temperature	0 ... +60 °C	0 ... +60 °C	-10 ... +60 °C				
housing material	PA 12	PA 12	plastic (ASA)	polyester	polyester	polyester	polyester / die-cast zinc
cable, 2 m	■	■	■				
flylead connector M8, L=200 mm	■	■	■				
connector M8			■	■	■	■	
connector M12							■
protection class	IP 67	IP 67	IP 67	IP 67	IP 67	IP 67	IP 67
page	96	97	98	99	100	101	102

cylindrical designs

product family	URAM 12	URAM 12	URAR 18	URAM 50
special type	Highspeed	Highspeed	chemically resistant	
width / diameter	12 mm	12 mm	18 mm	30 mm
scanning range sd	0 ... 40 mm	0 ... 70 mm	0 ... 400 mm	0 ... 3000 mm
potentiometer				■
external Teach-in	■	■		
Teach-in			■	■
repeat accuracy	< 1,5 mm	< 1,5 mm	< 1,5 mm	< 3 mm
operating temperature	-10 ... +60 °C	-10 ... +60 °C	0 ... +60 °C	-10 ... +60 °C
housing material	brass nickel plated	brass nickel plated	stainless steel 1.4435 (V4A)	brass nickel plated
cable, 2 m				■
connector M12	■	■	■	■
protection class	IP 67	IP 67	IP 67	IP 67
page	104	105	106	107

URDK 30



30 mm

0 ... 2000 mm



< 3 mm

-10 ... +60 °C

polyester /
die-cast zinc



IP 67

103



Sd = 200 mm



- detects sound absorbing objects
- long sensing range / no blind range
- short response time

general data

scanning range sd	0 ... 200 mm
reflector position Sde	60 ... 200 mm
adjusting range reflector (operating range)	$\pm 2,5\% \text{ Sde}$
adjusting range reflector (limit range)	$\pm 5\% \text{ Sde}$
repeat accuracy	< 1,5 mm
alignment aid	target indication flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 7 ms
release time toff	< 7 ms
sonic frequency	380 kHz
output indicator	green LED / red LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	55 mm
depth	24,5 mm

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	


order reference

connection types
cable, 2 m
flylead connector M8, L=200 mm

dimension drawing

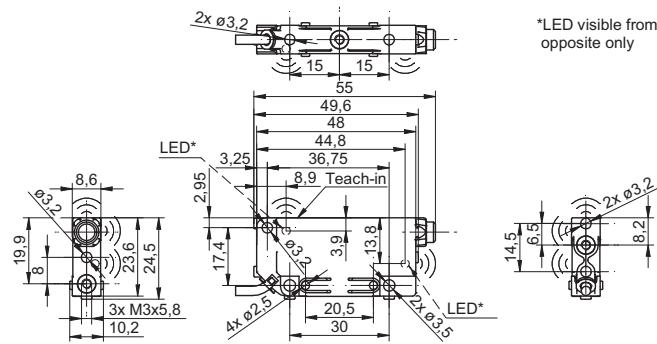


flylead connector version

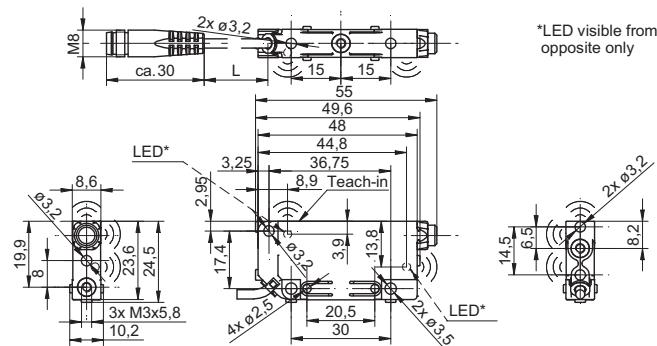


standard cable length 200 mm (L)

connection diagram



typical sonic cone profile

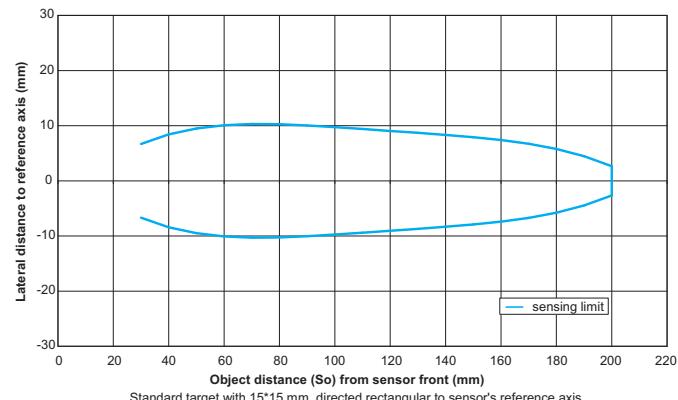

Sd = 200 mm

- detects sound absorbing objects
- long sensing range / no blind range
- short response time

**general data**

scanning range sd	0 ... 200 mm
reflector position Sde	60 ... 200 mm
adjusting range reflector (operating range)	$\pm 2.5\% \text{ Sde}$
adjusting range reflector (limit range)	$\pm 5\% \text{ Sde}$
repeat accuracy	< 1.5 mm
alignment aid	target indication flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 7 ms
release time toff	< 7 ms
sonic frequency	380 kHz
output indicator	green LED / red LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	48,8 mm
depth	30,5 mm



ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67



connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	

order reference	connection types
URDK 09G8914	cable, 2 m
URDK 09G8914/KS35A	flylead connector M8, L=200 mm

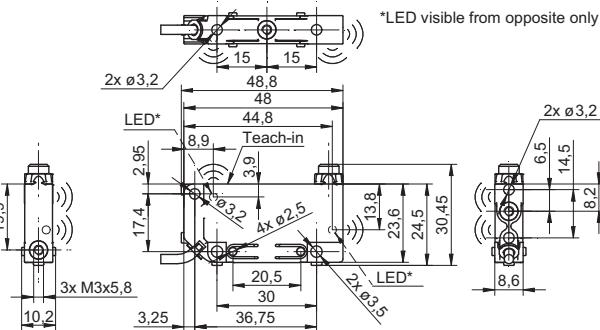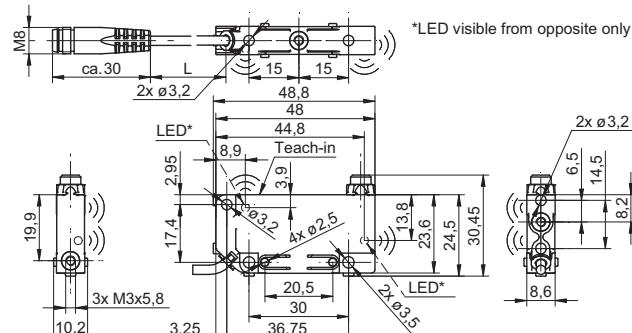dimension drawing**flylead connector version**

standard cable length 200 mm (L)

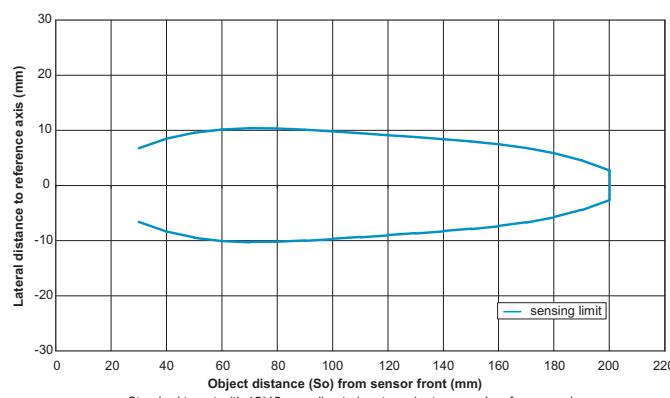connection diagram**typical sonic cone profile**



Sd = 200 mm



- small housing dimensions
- very low mass (4 g)
- long sensing range / no blind range

general data

scanning range sd	0 ... 200 mm
reflector position Sde	40 ... 200 mm
adjusting range reflector (operating range)	± 2,5 % Sde
adjusting range reflector (limit range)	± 5 % Sde
repeat accuracy	< 1,5 mm
alignment aid	target indication flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 15 ms
release time toff	< 15 ms
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	30 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	plastic (ASA)
width / diameter	10,4 mm
height / length	27 mm
depth	14 mm

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	

Accessories

10150326	Sensofix series 10 / series 20
10133792	Mounting bracket series 10 (L design)
10114501	Mounting bracket series 10 (U design)
10162083	Mounting panel for sensors series 10
10118798	Mounting bracket series 10
10162376	Sonic beam deflector for ultrasonic sensors series 10

for details: see accessories section


order reference

output circuit


connection types

URDK 10N8914	NPN make function (NO) / break function (NC)	cable, 2 m
URDK 10N8914/KS35A	NPN make function (NO) / break function (NC)	flylead connector M8, L=200 mm
URDK 10N8914/S35A	NPN make function (NO) / break function (NC)	connector M8
URDK 10P8914	PNP make function (NO) / break function (NC)	cable, 2 m
URDK 10P8914/KS35A	PNP make function (NO) / break function (NC)	flylead connector M8, L=200 mm
URDK 10P8914/S35A	PNP make function (NO) / break function (NC)	connector M8

dimension drawings

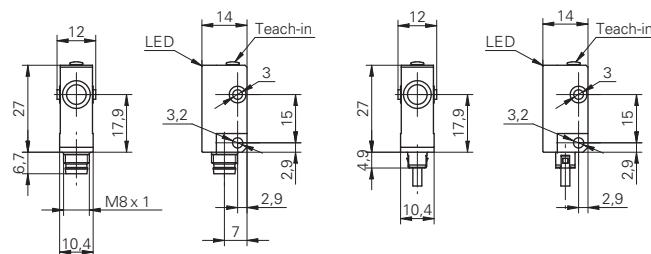


flylead connector version




standard cable length 200 mm (L)

connection diagrams

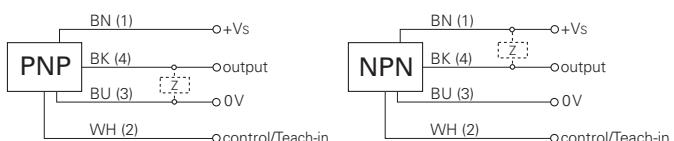

typical sonic cone profile

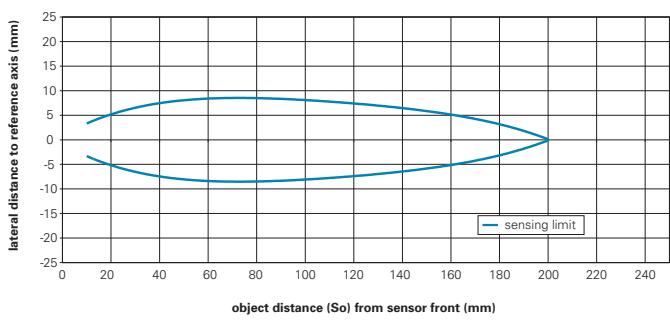



Sd = 200 mm

- internal and external Teach-in
- small sonic beam angle
- compact housing



general data

scanning range sd	0 ... 200 mm
reflector position Sde	40 ... 200 mm
adjusting range reflector (operating range)	$\pm 2.5\% \text{ Sde}$
adjusting range reflector (limit range)	$\pm 5\% \text{ Sde}$
repeat accuracy	< 1.5 mm
alignment aid	target indication flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 10 ms
release time toff	< 10 ms
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors


ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10150326	Sensofix series 10 / series 20
10153290	Sonic beam deflector series 20
for details: see accessories section	


dimension drawing



connection diagrams

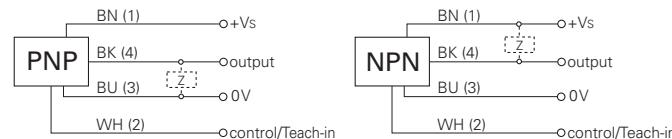

typical sonic cone profile

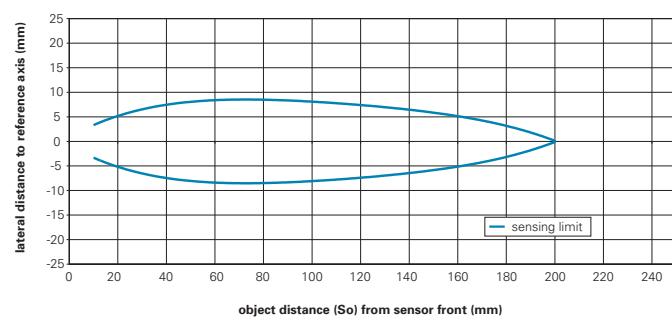

order reference	output circuit
URDK 20N6914/S35A	NPN make function (NO)
URDK 20N7914/S35A	NPN break function (NC)
URDK 20P6914/S35A	PNP make function (NO)
URDK 20P7914/S35A	PNP break function (NC)



Sd = 400 mm

- internal and external Teach-in
- wide sonic beam angle
- compact housing



general data

scanning range sd	0 ... 400 mm
reflector position Sde	100 ... 400 mm
adjusting range reflector (operating range)	$\pm 2,5\% \text{ Sde}$
adjusting range reflector (limit range)	$\pm 5\% \text{ Sde}$
repeat accuracy	< 1,5 mm
alignment aid	target indication flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 25 ms
release time toff	< 25 ms
sonic frequency	290 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10150326	Sensofix series 10 / series 20
10153290	Sonic beam deflector series 20


for details: see accessories section

order reference	output circuit
URDK 20N6912/S35A	NPN make function (NO)
URDK 20N7912/S35A	NPN break function (NC)
URDK 20P6912/S35A	PNP make function (NO)
URDK 20P7912/S35A	PNP break function (NC)


dimension drawing



connection diagrams

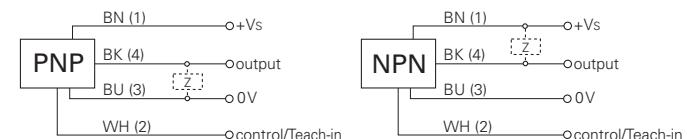

typical sonic cone profile

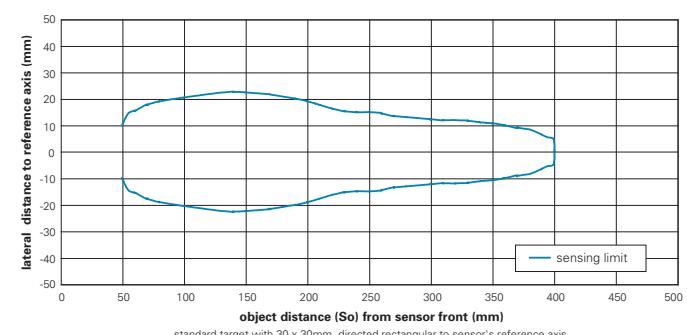



Sd = 1000 mm

- internal and external Teach-in
- small sonic beam angle
- compact housing



general data

scanning range sd	0 ... 1000 mm
reflector position Sde	200 ... 1000 mm
adjusting range reflector (operating range)	± 2,5 % Sde
adjusting range reflector (limit range)	± 5 % Sde
repeat accuracy	< 1,5 mm
alignment aid	target indication flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 50 ms
release time toff	< 50 ms
sonic frequency	240 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors


ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10150326	Sensofix series 10 / series 20
10153290	Sonic beam deflector series 20
for details: see accessories section	


dimension drawing



connection diagrams

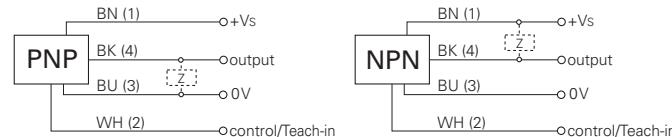

typical sonic cone profile

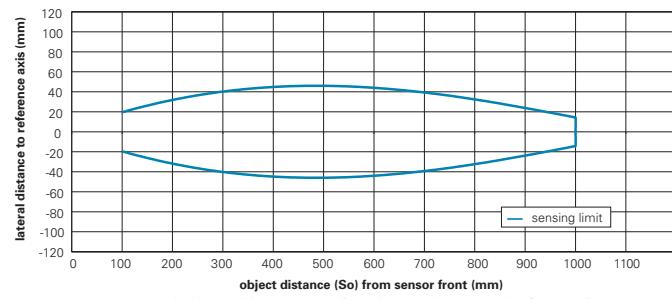

order reference	output circuit
URDK 20N6903/S35A	NPN make function (NO)
URDK 20N7903/S35A	NPN break function (NC)
URDK 20P6903/S35A	PNP make function (NO)
URDK 20P7903/S35A	PNP break function (NC)



Sd = 1000 mm

- potentiometer
- synchronization output
- detects sound absorbing objects



general data

scanning range sd	0 ... 1000 mm
reflector position Sde	200 ... 1000 mm
adjusting range reflector (operating range)	± 2,5 % Sde
adjusting range reflector (limit range)	± 5 % Sde
repeat accuracy	< 3 mm
alignment aid	target indication flashing
adjustment	potentiometer
temperature drift	< 2 % Sde
synchronization	yes
multiplex version	on request
response time ton (sync on)	< 50 ms
release time toff (sync on)	< 50 ms
sonic frequency	240 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

Accessories


10152386	Sensofix series 30
for details: see accessories section	

order reference	output circuit
URDK 30N1703/S14	NPN make function (NO)
URDK 30N3703/S14	NPN break function (NC)
URDK 30P1703/S14	PNP make function (NO)
URDK 30P3703/S14	PNP break function (NC)


dimension drawing



connection diagrams

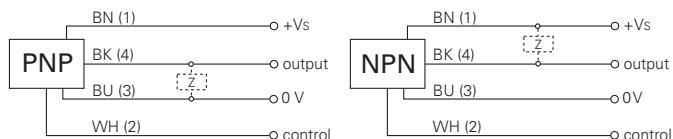

typical sonic cone profile

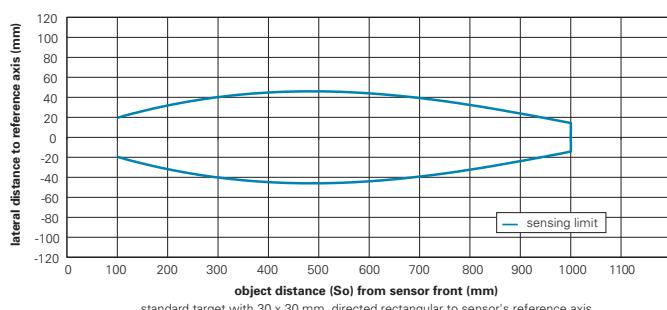

standard target with 30 x 30 mm, directed rectangular to sensor's reference axis



Sd = 2000 mm

- internal Teach-in
- long sensing range
- detects sound absorbing objects



general data

scanning range sd	0 ... 2000 mm
reflector position Sde	400 ... 2000 mm
adjusting range reflector (operating range)	$\pm 4\%$ Sde
adjusting range reflector (limit range)	$\pm 6\%$ Sde
repeat accuracy	< 3 mm
alignment aid	target indication flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 80 ms
release time toff	< 80 ms
sonic frequency	200 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors


ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10152386	Sensofix series 30
for details: see accessories section	


dimension drawing



connection diagram



typical sonic cone profile

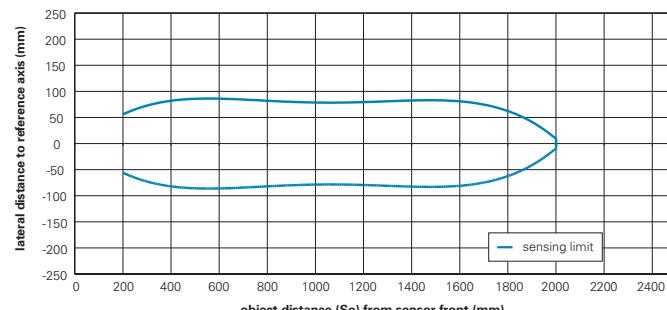

standard target with 100 x 100 mm, positioned perpendicularly to sensor's reference axis

order reference	output circuit
URDK 30P6104/S14	PNP make function (NO)
URDK 30P7104/S14	PNP break function (NC)



Sd = 40 mm

- high speed sensors
- with beam columnator for measurement in very small containers
- external Teach-in

general data

special type	Highspeed
scanning range sd	0 ... 40 mm
reflector position Sde	10 ... 40 mm
adjusting range reflector (operating range)	$\pm 2,5\% \text{ Sde}$
adjusting range reflector (limit range)	$\pm 5\% \text{ Sde}$
repeat accuracy	< 1,5 mm
alignment aid	target indication flashing
adjustment	external Teach-in
temperature drift	< 2 % Sde
response time ton	< 1,5 ms
release time toff	< 1,5 ms
switching frequency	< 200 Hz
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	100 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m




additional cable connectors and field wireable connectors: see accessories

Accessories

10151720 Sensofix series 12 round

10141584 Teach-in Adapter M12

for details: see accessories section

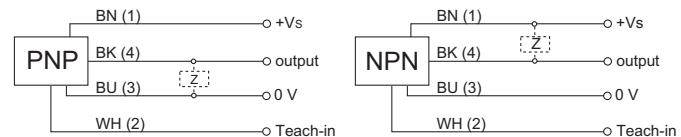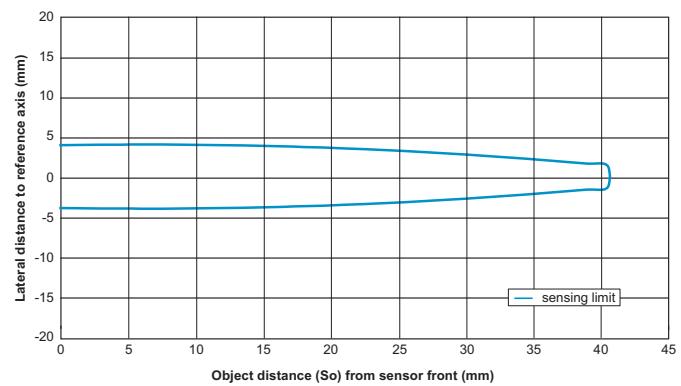**dimension drawing****connection diagrams****typical sonic cone profile****order reference**

URAM 12N8910/S14OD

URAM 12P8910/S14OD

output circuit

NPN make function (NO) / break function (NC)

PNP make function (NO) / break function (NC)



Sd = 70 mm



- high speed sensors
- small sonic beam angle
- external Teach-in

general data

special type	Hghspeed
scanning range sd	0 ... 70 mm
reflector position Sde	40 ... 70 mm
adjusting range reflector (operating range)	± 2,5 % Sde
adjusting range reflector (limit range)	± 5 % Sde
repeat accuracy	< 1,5 mm
alignment aid	target indication flashing
adjustment	external Teach-in
temperature drift	< 2 % Sde
response time ton	< 1,5 ms
release time toff	< 1,5 ms
switching frequency	< 200 Hz
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	12 mm
height / length	70 mm
connection types	connector M12

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors


ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10151720	Sensofix series 12 round
10141584	Teach-in Adapter M12
for details: see accessories section	


dimension drawing



connection diagrams

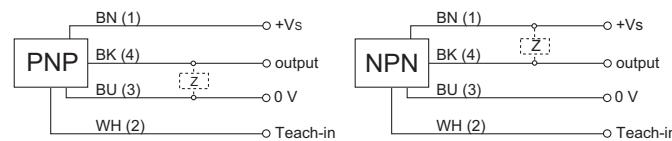

typical sonic cone profile

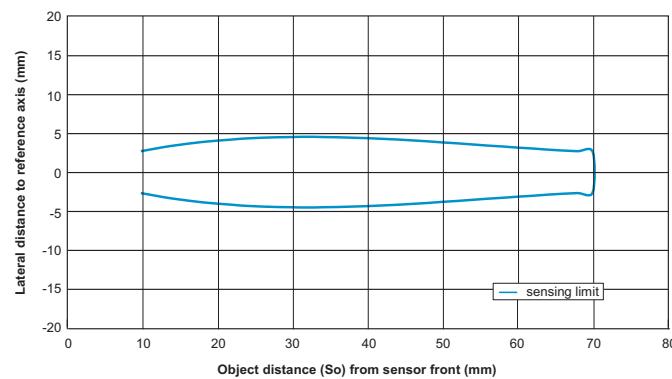

order reference

URAM 12N8910/S140	NPN make function (NO) / break function (NC)
URAM 12P8910/S140	PNP make function (NO) / break function (NC)

output circuit



Sd = 400 mm

- internal and external Teach-in
- sensorfront chemically resistant
- stainless steel housing



general data

special type	chemically resistant
scanning range sd	0 ... 400 mm
reflector position Sde	120 ... 400 mm
repeat accuracy	< 1,5 mm
alignment aid	target indication flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 25 ms
release time toff	< 25 ms
sonic frequency	400 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	stainless steel 1.4435 (V4A)
width / diameter	18 mm
height / length	91,5 mm
connection types	connector M12
coating active face	Parylene
material O-ring	FFKM
front of sensor durable against pressure	6 bar, 20'000 cycle

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

connectors and mating connectors

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories


Accessories

10151658	Sensofix series 18
10164264	Sonic beam deflector series 18 rectangular


for details: see accessories section

order reference	output circuit
URAR 18N6912/S14G	NPN make function (NO)
URAR 18N7912/S14G	NPN break function (NC)
URAR 18P6912/S14G	PNP make function (NO)
URAR 18P7912/S14G	PNP break function (NC)


dimension drawing



connection diagrams

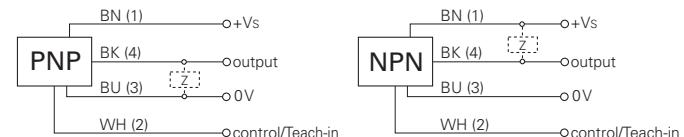

typical sonic cone profile

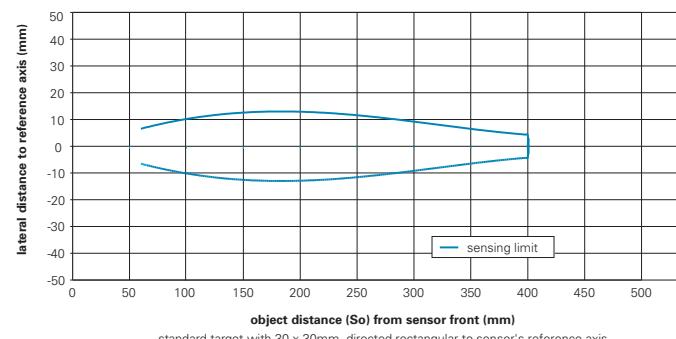

standard target with 30 x 30mm, directed rectangular to sensor's reference axis

Ultrasonic retro-reflective sensors

URAM 50



Sd = 3000 mm

- Teach-in or potentiometer
- synchronization output
- long sensing range

general data

scanning range sd	0 ... 3000 mm
reflector position Sde	600 ... 3000 mm
adjusting range reflector (operating range)	$\pm 4\%$ Sde
adjusting range reflector (limit range)	$\pm 6\%$ Sde
repeat accuracy	< 3 mm
alignment aid	target indication flashing
synchronization	yes
multiplex version	on request
response time ton	< 160 ms
release time toff	< 160 ms
sonic frequency	120 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max. (no load)	35 mA

output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
width / diameter	30 mm
height / length	95 mm

ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

connectors and mating connectors



ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories




dimension drawings




Teach-in = Teach-in or potentiometer

connection diagrams

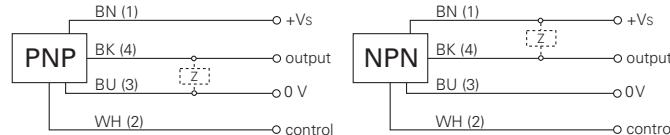


typical sonic cone profile

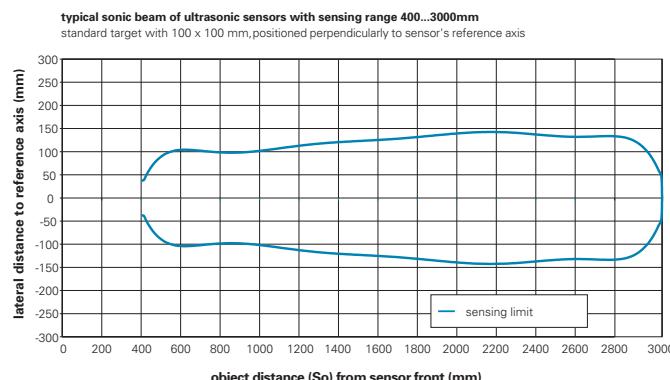

order reference	adjustment	output circuit	temperature drift	connection types
URAM 50N1721	potentiometer	NPN make function (NO)	< 0,18 % Sde/K	cable, 2 m
URAM 50N1721/S14	potentiometer	NPN make function (NO)	< 0,18 % Sde/K	connector M12
URAM 50P6121	Teach-in	PNP make function (NO)	< 2 % Sde	cable, 2 m
URAM 50P6121/S14	Teach-in	PNP make function (NO)	< 2 % Sde	connector M12
URAM 50P7121	Teach-in	PNP break function (NC)	< 2 % Sde	cable, 2 m
URAM 50P7121/S14	Teach-in	PNP break function (NC)	< 2 % Sde	connector M12



Ultrasonic through beam sensors

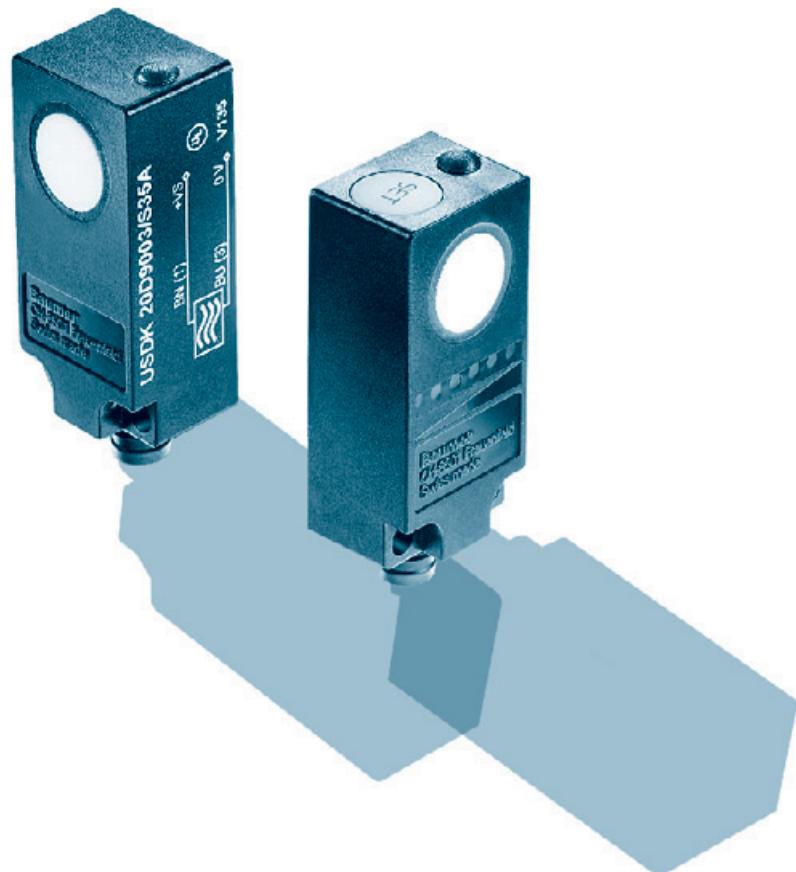

Introduction
Rectangular designs

Page 110
Page 112




Description

The emitter and the receiver are in two separate housings. The continuous signal by the emitter is picked up by the receiver. An object interrupting the sonic beam will make the receiver react by giving an output signal. The user may adjust the amplification of the input signal where required.

When an object interrupts the sonic beam, the receiver will react and give an output signal. With the help of the built in potentiometer, the user can adjust the amplification of the input signal, as necessary.

The state of the output stage as well as the signal intensity are indicated by an LED.

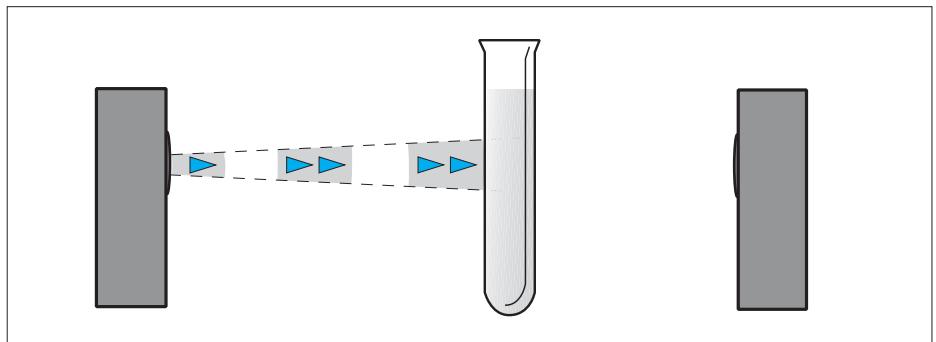

Hysteresis


Hysteresis is the difference between the operating point (S1) and the release point (S2). If an object interrupts the sonic beam, the signal level must be increased by about 75 % in order to reset the output signal. Objects which follow one another in quick succession can therefore be easily detected.

Sonic beam angle α

The sonic beam angle (α) defines the boundaries of the emitted conical beam of the ultrasonic through beam sensor.

Repeatability

Due to the narrow angle of the sonic beam the repeatability of the switching point of two successive targets, under identical conditions, is better than 3 mm.

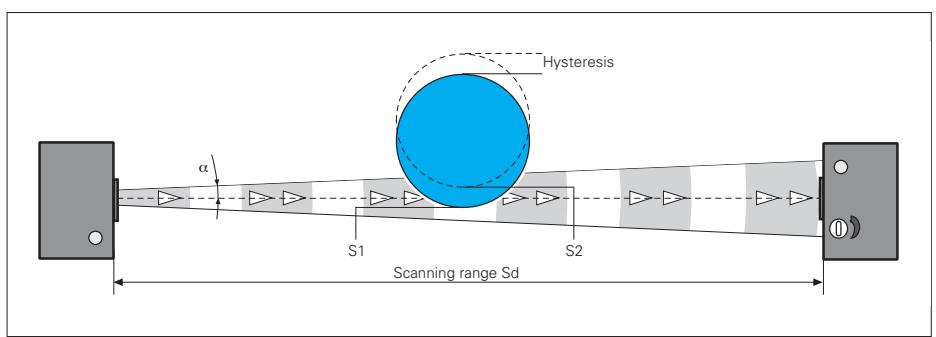



Teach-in procedure Series 20

All adjustments can be made with the internal Teach-in key.

Sensitivity Adjustment

The LEDs on the display indicate the receiver's sensitivity. The sensitivity can be called up at any time by pressing the Teach-in key, even with locked teaching functionality.

Move the emitter and receiver to the desired position.

Switch the emitter to its adjustment mode by pressing and holding the Teach-in key for approx. two seconds until the green LED begins flashing. Release the Teach-in key. The green LED now indicates the switching state. Press the Teach-in key repeatedly until the desired sensitivity is achieved and the green LED is continuously on.


Sensitivity is indicated by the yellow LEDs on the display.

To complete the Teach-in process, press and hold the Teach-in key for approx. two seconds until the green LED begins flashing rapidly. Release the Teach-in key. The LED is off!

Response Time

Switch the sensor to teach mode by pressing and holding the Teach-in key for approx. four seconds until the red LED begins flashing. Release the Teach-in key. The red LED lights up continuously. Press the Teach-in key repeatedly until the desired response time is achieved.

LED display:



no LED on; approximately 5 ms response time delay

1. LED on; approximately 10 ms response time delay

2. LED on; approximately 20 ms response time delay

3. LED on; approximately 40 ms response time delay

4. LED on; approximately 80 ms response time delay

5. LED on; approximately 160 ms response time delay

6. LED on; approximately 320 ms response time delay

To complete the Teach-in process, press and hold the Teach-in key for approx. two seconds until the red LED begins flashing rapidly. Release the Teach-in key. The response time is now set.

Resetting the receiver to its original factory settings

Pressing and holding the Teach-in key for longer than six seconds will return the sensor to its factory settings. This is indicated on the receiver by the rapid flashing of the green/red LED.

Teach-in lock

The Teach-in function is locked five minutes after power up or five minutes after the end of the last Teach-in process.



Sd = 1000 mm

- Teach-in
- LED Display
- response time adjustable <= 5 ... 320 ms



general data

scanning range sd	0 ... 1000 mm
scanning range far limit Sde	0 ... 1000 mm
alignment aid	target indication flashing
receiver	
object size (at Sd = 50 mm)	> 2 cm ²
hysteresis typ.	5 mm
repeat accuracy	< 3 mm
response time ton	< 5 ms
release time toff	< 5 ms
adjustment	Teach-in
output indicator	LED green

emitter

sonic frequency	250 kHz
power on indication	LED yellow

electrical data

voltage supply range +Vs	15 ... 30 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

receiver

current consumption max. (no load)	30 mA
output circuit	PNP make function (NO)
output current	< 200 mA

emitter

current consumption max. (no load)	40 mA
------------------------------------	-------

mechanical data

type	rectangular
housing material	polyester
width / diameter	20 mm
height / length	42 mm
depth	15 mm
connection types	connector M8


ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67


order reference emitter / receiver

UEDK 20P6103/S35A	receiver
USDK 20D9003/S35A	emitter

dimension drawings

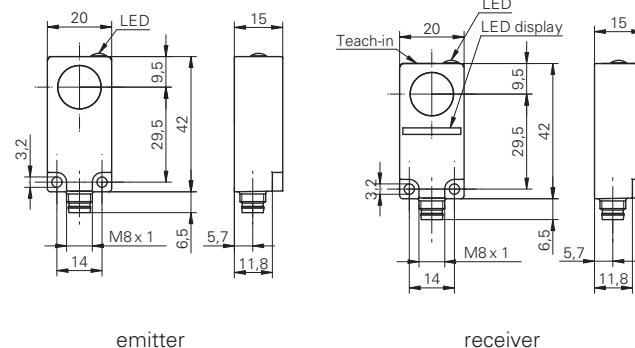

connection diagrams



connectors and mating connectors

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10150326 Sensofix series 10 / series 20

for details: see accessories section



Sd = 700 mm

- potentiometer
- complementary outputs
- response time <= 5 ms

**general data**

scanning range sd	0 ... 700 mm
scanning range far limit Sde	0 ... 700 mm
alignment aid	target indication flashing

receiver

object size (at Sd = 50 mm)	> 2 cm ²
hysteresis typ.	5 mm
repeat accuracy	< 3 mm
response time ton	< 5 ms
release time toff	< 5 ms
adjustment	potentiometer
output indicator	LED green

emitter

sonic frequency	220 kHz
power on indication	LED yellow

electrical data

voltage supply range +Vs	12 ... 30 VDC
residual ripple	< 10 % Vs
reverse polarity protection	yes

receiver

current consumption max. (no load)	30 mA
output current	< 200 mA
voltage drop Vd	< 2 VDC
short circuit protection	yes

emitter




current consumption max. (no load)	22 mA
------------------------------------	-------

mechanical data

type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	18,5 mm

ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

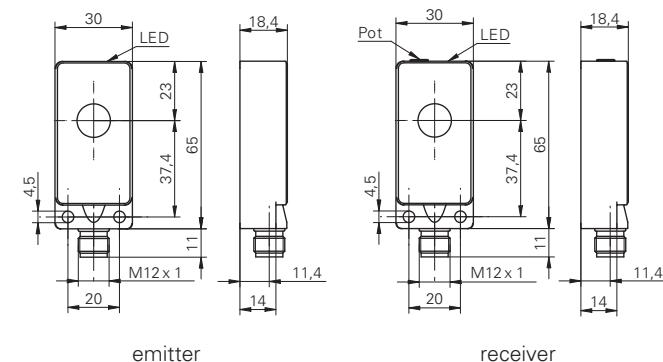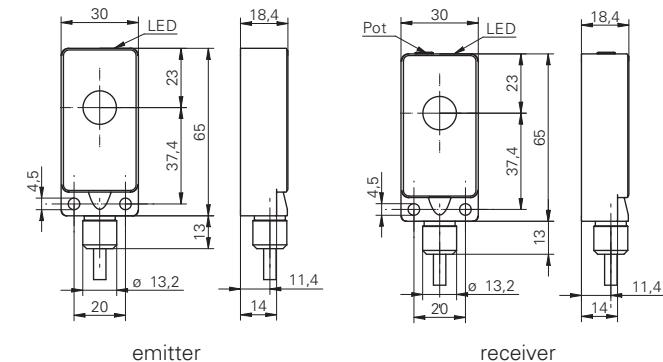dimension drawings connector**dimension drawings cable****connection diagrams****connectors and mating connectors**

ESG 34AH0200 Connector M12, 4 pin, straight, 2 m

ESW 33AH0200 Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

Accessories

10152386 Sensofix series 30

for details: see accessories section


order reference	emitter / receiver	output circuit	connection types
UEDK 30N5103	receiver	NPN complementary	cable, 2 m
UEDK 30N5103/S14	receiver	NPN complementary	connector M12
UEDK 30P5103	receiver	PNP complementary	cable, 2 m
UEDK 30P5103/S14	receiver	PNP complementary	connector M12
USDK 30D9003	emitter	-	cable, 2 m
USDK 30D9003/S14	emitter	-	connector M12



Accessories



Connectors	Page 116
Connectors/Pin assignment	Page 119
Mounting accessories	Page 120
Mounting kits <i>SENSOFIX</i>	Page 122


ESW 31 - Connector M8 angular**order reference**

ESW 31AH0200 Connector M8, 4 pin, angular, 2 m

ESW 31AH0500 Connector M8, 4 pin, angular, 5 m

ESW 31AH1000 Connector M8, 4 pin, angular, 10 m

- Connector unshielded
- 4 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836


ESW 31G - Connector M8 angular, shielded**order reference**

ESW 31AH0200G Connector M8, 4 pin, angular, 2 m, shielded

ESW 31AH0500G Connector M8, 4 pin, angular, 5 m, shielded

ESW 31AH1000G Connector M8, 4 pin, angular, 10 m, shielded

- Connector shielded, screen connected with cap nut
- 4 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836


ESG 32 - Connector M8 straight**order reference**

ESG 32AH0200 Connector M8, 4 pin, straight, 2 m

ESG 32AH0500 Connector M8, 4 pin, straight, 5 m


ESG 32AH1000 Connector M8, 4 pin, straight, 10 m

- Connector unshielded
- 4 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

ESG 32G - Connector M8 straight, shielded**order reference**


ESG 32AH0200G	Connector M8, 4 pin, straight, 2 m, shielded
ESG 32AH0500G	Connector M8, 4 pin, straight, 5 m, shielded
ESG 32AH1000G	Connector M8, 4 pin, straight, 10 m, shielded

- Connector shielded, screen connected with cap nut
- 4 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

ESW 33 - Connector M12 angular**order reference**


ESW 33AH0200	Connector M12, 4 pin, angular, 2 m
ESW 33AH0500	Connector M12, 4 pin, angular, 5 m
ESW 33AH1000	Connector M12, 4 pin, angular, 10 m
ESW 33CH0200	Connector M12, 5 pin, angular, 2 m
ESW 33CH0500	Connector M12, 5 pin, angular, 5 m
ESW 33SH0200	Connector M12, 3 pin, angular, 2 m
ESW 33SH0500	Connector M12, 3 pin, angular, 5 m
ESW 33SH1000	Connector M12, 3 pin, angular, 10 m

- Connector unshielded
- 3, 4 and 5 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

ESW 33G - Connector M12 angular, shielded**order reference**

ESW 33AH0200G	Connector M12, 4 pin, angular, 2 m, shielded
ESW 33AH0500G	Connector M12, 4 pin, angular, 5 m, shielded
ESW 33AH1000G	Connector M12, 4 pin, angular, 10 m, shielded
ESW 33CH0500G	Connector M12, 5 pin, angular, 5 m, shielded


- Connector shielded, screen connected with cap nut
- 4 and 5 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

ESG 34 - Connector M12 straight

- Connector unshielded
- 3, 4 and 5 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

order reference

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESG 34AH0500	Connector M12, 4 pin, straight, 5 m
ESG 34AH1000	Connector M12, 4 pin, straight, 10 m
ESG 34CH0200	Connector M12, 5 pin, straight, 2 m
ESG 34CH0500	Connector M12, 5 pin, straight, 5 m
ESG 34SH0200	Connector M12, 3 pin, straight, 2 m
ESG 34SH0500	Connector M12, 3 pin, straight, 5 m
ESG 34SH1000	Connector M12, 3 pin, straight, 10 m


ESG 34G - Connector M12 straight, shielded

- Connector shielded, screen connected with cap nut
- 4 and 5 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

order reference

ESG 34AH0200G	Connector M12, 4 pin, straight, 2 m, shielded
ESG 34AH0500G	Connector M12, 4 pin, straight, 5 m, shielded
ESG 34AH1000G	Connector M12, 4 pin, straight, 10 m, shielded
ESG 34CH0200G	Connector M12, 5 pin, straight, 2 m, shielded
ESG 34CH0500G	Connector M12, 5 pin, straight, 5 m, shielded
ESG 34CH1000G	Connector M12, 5 pin, straight, 10 m, shielded

M8 4 pin



1 = BN
2 = WH
3 = BU
4 = BK


ESG 32

ESG 32G

ESW 31


ESW 31G

M12 3 pin




1 = BN
2 = n.c.
3 = BU
4 = WH

M12 4 pin



1 = BN
2 = WH
3 = BU
4 = BK

M12 5 pin



1 = BN
2 = WH
3 = BU
4 = BK
5 = GY

ESG 34S


ESW 33S

ESG 34A

ESW 33A

ESG 34C

ESW 33C


Mounting bracket for sensors series 10

- Material: Steel

For use with UxDK 10, FxDK 10, OxDK 10

order reference

10118798 Mounting bracket series 10


Mounting bracket for sensors series 10 (L design)

- Material: Steel

For use with UxDK 10, FxDK 10, OxDK 10

order reference

10133792 Mounting bracket series 10 L design


Mounting bracket for sensors series 10 (U design)

- Material: Steel

For use with UxDK 10, FxDK 10, OxDK 10 (only cable versions)

order reference


10114501 Mounting bracket series 10 (U design)

Mounting panel for sensors series 10

For use with UxDK 10, FxDK 10, OxDK 10

order reference


10162083 Mounting panel for sensors series 10

Sonic beam deflector for ultrasonic sensors series 10

- Set of 2 included 1 x left, 1 x right

order reference

10162376 Sonic beam deflector for ultrasonic sensors series 10


Sonic beam deflector for ultrasonic sensors series 18 round

- Sonic beam deflector for ultrasonic sensors

For ultrasonic sensors series 18

order reference

10164264 Sonic beam deflector series 18 rectangular


Sonic beam deflector for ultrasonic sensors series 20

- Sonic beam deflector for ultrasonic sensors


For ultrasonic sensors series 20

order reference

10153290 Sonic beam deflector series 20

Teach-in Adapter M12**order reference**

10141584 Teach-in Adapter M12

Converter 3-point

- Converter with three teachable outputs

For use with all distance measuring inductive and ultrasonic sensors

order reference

10163979 Converter 3-point (M12)

Test unit for sensors analog & digital

- Output via display (V or mA) or LED (PNP/NPN)
- Teach-in of sensors with integrated Teach- button
- Connection for plug in power supply (available as accessory)

Test- and configuration device for analog and digital PNP/NPN sensors with 18 VDC supply voltage

order reference

11084376 Test unit for sensors analog & digital

Test unit for sensors digital

- LED (red/green) for digital PNP/NPN signals
- Teach-in of sensors with integrated Teach- button
- Connection for plug in power supply (available as accessory)

Test- and configuration device for digital PNP/NPN sensors with 18 VDC supply voltage

order reference

11084377 Test unit for sensors digital


Power supply for sensor test unit

- Input 90-260 VAC
- Output 24 V/0.75 A
- Interchangeable plug-Type A, C, G and I

Protects the batteries of the sensor tester analog & digital for extended lifetime

order reference

11087165 Test unit for sensors


Sensofix-Mounting kit for sensors series 12 round

- Clamps made of stainless steel
- Ball pivots made of galvanized steel
- Mounting panel made of stainless steel

For use with all sensors in M12 housing

order reference

10151720 Sensofix series 12 round


Sensofix-Mounting kit for sensors series 18 round

- Clamps made of stainless steel
- Ball pivots made of galvanized steel
- Mounting panel made of stainless steel

For use with all sensors in M18 housing

order reference

10151658 Sensofix series 18


Sensofix-Mounting kit for sensors series 10/20

- Clamps made of stainless steel
- Ball pivots made of galvanized steel
- Mounting panel made of stainless steel

For use with photoelectric and ultrasonic sensors series 10, series 20

order reference

10150326 Sensofix series 10 / series 20

Sensofix-Mounting kit for sensors series 30

- Clamps made of stainless steel
- Ball pivots made of galvanized steel
- Mounting panel made of stainless steel

For use with inductive and ultrasonic sensors series 30

order reference

10152386 Sensofix series 30

order reference	page	order reference	page	order reference	page
E		UNAM 18N6903/S14	75	UNDK 09U6914/D1	34
ESG 32AH0200	116	UNAM 18P1703	74	UNDK 09U6914/KS35A	31
ESG 32AH0200G	117	UNAM 18P3703	74	UNDK 09U6914/KS35AD1	34
ESG 32AH0500	116	UNAM 18P6903/S14	75	UNDK 09U6914	31
ESG 32AH0500G	117	UNAM 18P7903/S14	75	UNDK 10N8914/KS35A	62
ESG 32AH1000	116	UNAM 18U6903/S14	47	UNDK 10N8914/S35A	62
ESG 32AH1000G	117	UNAM 30I6103/S14	50	UNDK 10N8914	62
ESG 34AH0200	118	UNAM 30I6103	50	UNDK 10P8914/KS35A	62
ESG 34AH0200	118	UNAM 30I6803/S14	50	UNDK 10P8914/S35A	62
ESG 34AH0200G	118	UNAM 30N1104/S14	78	UNDK 10P8914	62
ESG 34AH0500	118	UNAM 30N1104	78	UNDK 10U6914/KS35A	36
ESG 34AH0500G	118	UNAM 30N3104/S14	78	UNDK 10U6914/S35A	36
ESG 34AH1000	118	UNAM 30N3104	78	UNDK 10U6914	36
ESG 34AH1000G	118	UNAM 30P1104/S14	78	UNDK 20I6903/S35A	39
ESG 34CH0200	118	UNAM 30P1104	78	UNDK 20I6912/S35A	38
ESG 34CH0200G	118	UNAM 30P3104/S14	78	UNDK 20I6914/S35A	37
ESG 34CH0500	118	UNAM 30P3104	78	UNDK 20N6903/S35A	65
ESG 34CH0500G	118	UNAM 30U6103/S14	50	UNDK 20N6912/S35A	64
ESG 34CH1000G	118	UNAM 30U6103	50	UNDK 20N6914/S35A	63
ESG 34SH0200	118	UNAM 30U9103/S14	50	UNDK 20N7903/S35A	65
ESG 34SH0500	118	UNAM 30U9103	50	UNDK 20N7912/S35A	64
ESG 34SH1000	118	UNAM 50I6121/S14	51	UNDK 20N7914/S35A	63
ESW 31AH0200	116	UNAM 50I6121	51	UNDK 20P6903/S35A	65
ESW 31AH0200G	116	UNAM 50N1721/S14	79	UNDK 20P6912/S35A	64
ESW 31AH0500	116	UNAM 50N1721	79	UNDK 20P6914/S35A	63
ESW 31AH0500G	116	UNAM 50N3721/S14	79	UNDK 20P7803/S35A	65
ESW 31AH1000	116	UNAM 50N3721	79	UNDK 20P7912/S35A	64
ESW 31AH1000G	116	UNAM 50P1721/S14	79	UNDK 20P7914/S35A	63
ESW 33AH0200	117	UNAM 50P1721	79	UNDK 20U6903/S35A	39
ESW 33AH0200G	117	UNAM 50P3721/S14	79	UNDK 20U6912/S35A	38
ESW 33AH0500	117	UNAM 50P3721	79	UNDK 20U6914/S35A	37
ESW 33AH0500G	117	UNAM 50U6121/S14	51	UNDK 30I6103/S14	42
ESW 33AH1000	117	UNAM 50U6121	51	UNDK 30I6103	42
ESW 33AH1000G	117	UNAR 18I6903/S14G	49	UNDK 30I6104/S14	43
ESW 33CH0200	117	UNAR 18I6912/S14G	48	UNDK 30I6112/S14	41
ESW 33CH0500	117	UNAR 18N6903/S14G	77	UNDK 30I6112	41
ESW 33CH0500G	117	UNAR 18N6912/S14G	76	UNDK 30I6113/S14	40
ESW 33SH0200	117	UNAR 18N7903/S14G	77	UNDK 30I6113	40
ESW 33SH0500	117	UNAR 18N7912/S14G	76	UNDK 30N1703/S14	68
ESW 33SH1000	117	UNAR 18P6903/S14G	77	UNDK 30N1703	68
U		UNAR 18P6912/S14G	76	UNDK 30N1712/S14	67
UEDK 20P6103/S35A	112	UNAR 18P7903/S14G	77	UNDK 30N1712	67
UEDK 30N5103/S14	113	UNAR 18U6903/S14G	49	UNDK 30N1713/S14	66
UEDK 30N5103	113	UNAR 18U6912/S14G	48	UNDK 30N1713	66
UEDK 30P5103/S14	113	UNCK 09G8914/D1	59	UNDK 30N3703/S14	68
UEDK 30P5103	113	UNCK 09G8914/IO	27	UNDK 30N3703	68
UNAM 12I9912/S14	46	UNCK 09G8914/KS35A/IO	27	UNDK 30N3712/S14	67
UNAM 12I9914/S14	45	UNCK 09G8914/KS35A	58	UNDK 30N3712	67
UNAM 12N1912/S14	73	UNCK 09G8914/KS35AD1	59	UNDK 30N3713/S14	66
UNAM 12N1914/S14	72	UNCK 09G8914	58	UNDK 30N3713	66
UNAM 12N1914/S14D	70	UNCK 09T9114/D1	30	UNDK 30P1703/S14	68
UNAM 12N3912/S14	73	UNCK 09T9114/KS35A	28	UNDK 30P1703	68
UNAM 12N3914/S14	72	UNCK 09T9114/KS35AD1	30	UNDK 30P1712/S14	67
UNAM 12N8910/S14O	71	UNCK 09T9114	28	UNDK 30P1712	67
UNAM 12N8910/S14OD	69	UNCK 09U6914/D1	29	UNDK 30P1713/S14	66
UNAM 12P1912/S14	73	UNCK 09U6914/KS35A	26	UNDK 30P1713	66
UNAM 12P1914/S14	72	UNCK 09U6914/KS35AD1	29	UNDK 30P3703	68
UNAM 12P1914/S14D	70	UNCK 09U6914	26	UNDK 30P3712/S14	67
UNAM 12P3912/S14	73	UNDK 09G8914/D1	61	UNDK 30P3712	67
UNAM 12P3914/S14	72	UNDK 09G8914/IO	32	UNDK 30P3713/S14	66
UNAM 12P8910/S14O	71	UNDK 09G8914/KS35A/IO	32	UNDK 30P3713	66
UNAM 12P8910/S14OD	69	UNDK 09G8914/KS35A	60	UNDK 30U6103/S14	42
UNAM 12U9912/S14	46	UNDK 09G8914/KS35AD1	61	UNDK 30U6103	42
UNAM 12U9914/S14	45	UNDK 09G8914	60	UNDK 30U6104/S14	43
UNAM 12U9914/S14D	44	UNDK 09T9114/D1	35	UNDK 30U6104	43
UNAM 18I6903/S14	47	UNDK 09T9114/KS35A	33	UNDK 30U6112/S14	41
UNAM 18N1703	74	UNDK 09T9114/KS35AD1	35	UNDK 30U6112	41
UNAM 18N3703	74	UNDK 09T9114	33	UNDK 30U6113/S14	40

order reference	page	order reference	page	order reference	page
UNDK 30U6113	40				
UNDK 30U9103/S14	42				
UNDK 30U9103	42				
UNDK 30U9112/S14	41				
UNDK 30U9112	41				
UNDK 30U9113/S14	40				
UNDK 30U9113	40				
URAM 12N8910/S14O	105				
URAM 12N8910/S14OD	104				
URAM 12P8910/S14O	105				
URAM 12P8910/S14OD	104				
URAM 50N1721/S14	107				
URAM 50N1721	107				
URAM 50P6121/S14	107				
URAM 50P6121	107				
URAM 50P7121/S14	107				
URAM 50P7121	107				
URAR 18N6912/S14G	106				
URAR 18N7912/S14G	106				
URAR 18P6912/S14G	106				
URAR 18P7912/S14G	106				
URCK 09G8914/KS35A	96				
URCK 09G8914	96				
URDK 09G8914/KS35A	97				
URDK 09G8914	97				
URDK 10N8914/KS35A	98				
URDK 10N8914/S35A	98				
URDK 10N8914	98				
URDK 10P8914/KS35A	98				
URDK 10P8914/S35A	98				
URDK 10P8914	98				
URDK 20N6903/S35A	101				
URDK 20N6912/S35A	100				
URDK 20N6914/S35A	99				
URDK 20N7903/S35A	101				
URDK 20N7912/S35A	100				
URDK 20N7914/S35A	99				
URDK 20P6903/S35A	101				
URDK 20P6912/S35A	100				
URDK 20P6914/S35A	99				
URDK 20P7903/S35A	101				
URDK 20P7912/S35A	100				
URDK 20P7914/S35A	99				
URDK 30N1703/S14	102				
URDK 30N3703/S14	102				
URDK 30P1703/S14	102				
URDK 30P3703/S14	102				
URDK 30P6104/S14	103				
URDK 30P7104/S14	103				
USDK 20D9003/S35A	112				
USDK 30D9003/S14	113				
USDK 30D9003	113				
UZAM 30N6103/S14	88				
UZAM 30P6103/S14	88				
UZAM 30P6103	88				
UZAM 30P6803/S14C	88				
UZAM 50N6121/S14	89				
UZAM 50N6121	89				
UZAM 50P6121/S14	89				
UZAM 50P6121	89				
UZDK 30N6112/S14	85				
UZDK 30P6103/S14	86				
UZDK 30P6103	86				
UZDK 30P6104/S14	87				
UZDK 30P6104	87				
UZDK 30P6112/S14	85				
UZDK 30P6113/S14	84				
UZDK 30P6113	84				

Worldwide presence.

We strive to be close to our customers all around the world. We listen to them, and then after understanding their needs, we provide the best solution. Worldwide customer service for us starts with on-the-spot personal discussions and qualified consultation. Our application engineers speak your language and strive from the start, through an interactive problem analysis, to offer comprehensive and user-compatible solutions. The worldwide Baumer sales organizations guarantee a high level of readiness to deliver.



Africa	America	Asia	Europe	Oceania
Algeria	Brazil	Bahrain	Austria	Australia
Cameroon	Canada	China	Belgium	New Zealand
Côte d'Ivoire	Colombia	India	Bulgaria	
Egypt	Mexico	Indonesia	Croatia	
Morocco	United States	Israel	Czech Republic	
Reunion	Venezuela	Japan	Denmark	
South Africa		Kuwait	Finland	
		Malaysia	France	
		Oman	Germany	
		Philippines	Greece	
		Qatar	Hungary	
		Saudi Arabia	Italy	
		Singapore	Malta	
		South Korea	Martinique	
		Taiwan	Netherlands	
		Thailand	Norway	
		UAE	Poland	
			Portugal	
			Romania	
			Russia	
			Serbia	
			Slovakia	
			Slovenia	
			Spain	
			Sweden	
			Switzerland	
			Turkey	
			United Kingdom	



For more information
about our worldwide
locations go to:
www.baumer.com/worldwide

Our entire portfolio

Baumer has the perfect solution for every application.

Presence detection

- Inductive sensors
- Photoelectric sensors
- Ultrasonic sensors
- Capacitive sensors
- Magnetic sensors
- Precision mechanical switches

Distance measurement

- Inductive sensors
- Photoelectric sensors
- Ultrasonic sensors
- Linear encoders without bearings
- Cable-pull encoders

Angle measurement / Rotary encoders

- Absolute encoders
- Incremental encoders
- HeavyDuty encoders
- Bearingless encoders
- Format alignment
- Inclination sensors

Identification / Image processing

- Industrial Cameras
- Vision Sensors

Process instrumentation

- Level measurement
- Temperature measurement
- Pressure measurement
- Conductivity measurement
- Force/strain sensors
- Counters and process displays



Baumer Group
International Sales
P.O. Box · Hummelstrasse 17 · CH-8501 Frauenfeld
Phone +41 52 728 1122 · Fax +41 52 728 1144
sales@baumer.com · www.baumer.com

Represented by: